



**DUKERS**  
Quality Commercial Refrigeration



## REACH IN REFRIGERATOR

D83AR-GS3

Top Mounted / 3 Glass Door



### **i** TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz  
Refrigerant R290  
Type of Defrost Automatic  
Interior Material Stainless Steel  
Exterior Material Stainless Steel  
Temperature Range °F 33 ~ 41°F  
Compressor Power (HP) 1/2  
Nema Config. NEMA5-15P



### PRODUCT FEATURES

-  The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.
-  Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
-  Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
-  Hinged glass doors, tempered glass, UV blocking.
-  R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
-  Epoxy coated wire shelves.
-  Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
-  High quality coated stainless adjustable shelves prevent peel and rust.
-  Lifetime warranty on hinges.
-  Adjustable front locking casters.



### HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



**DUKERS**

Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

 1-800-931-8628


 [info@dukersusa.com](mailto:info@dukersusa.com)

[www.DukersUSA.com](http://www.DukersUSA.com)


# DETAILS & SPECIFICATIONS

## D83AR-GS3

Front View

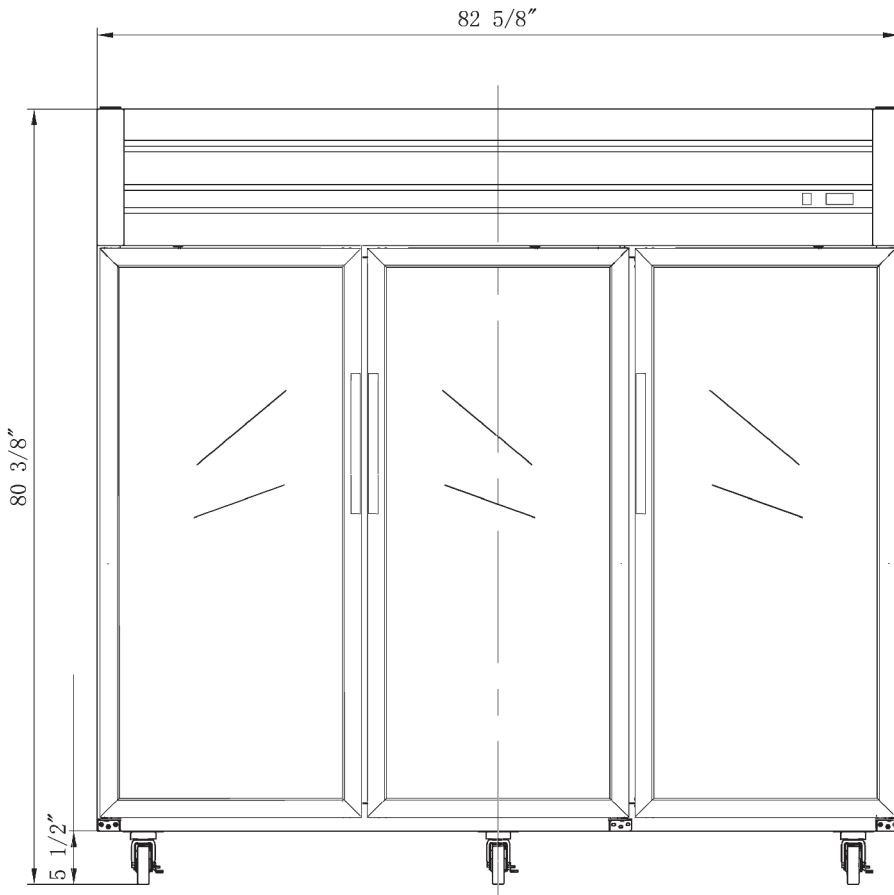

Side View

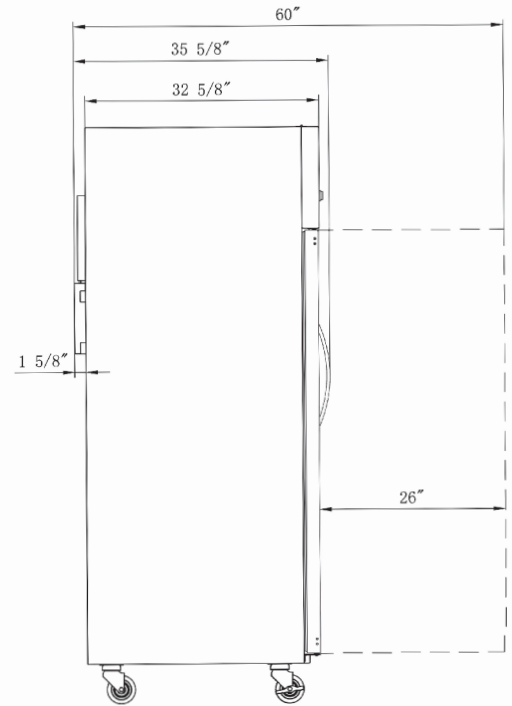

### MODEL D83AR-GS3

|                           |              |
|---------------------------|--------------|
| Rated Voltage             | 115V         |
| Rated Frequency           | 60Hz         |
| Total Input Power         | 760W         |
| Total Current             | 8.6A         |
| Total Capacity            | 65.88 cu ft  |
| Climatic Category         | 4-5          |
| Protection Type           | I            |
| Design Pressure High Side | 300 PSIG     |
| Design Pressure Low Side  | 150 PSIG     |
| Insulation Blowing Gas    | C-Pentane    |
| Refrigerant               | R290/5.22 oz |

| MODEL     | EXTERNAL DIMENSION<br>WXDXH (INCHES) | PACKAGING DIMENSION<br>WXDXH (INCHES) | PRODUCT NET<br>WEIGHT | # OF<br>SHELVES | 40HQ<br>CONTAINER CERT. |
|-----------|--------------------------------------|---------------------------------------|-----------------------|-----------------|-------------------------|
| D83AR-GS3 | 82 5/8 x 35 5/8 x 80 3/8             | 84 1/4 x 36 5/8 x 84 3/8              | 650 lbs               | 12              | 13                      |



AutoQuotes



115/60/1  
NEMA-5-15P



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@ info@dukersusa.com

www.DukersUSA.com