
STONE FOREST

STONE FOREST INSTRUCTIONS Fountain Installation Kit, 36'' Round

36'' diam. × 10''H Holds 35 gallons of water and up to 2000 lbs of weight



Kit includes: 6 top plates, center support, round basin

1. Get your shovel and level out. Dig a hole 9" deep, 30" in diameter at the bottom, and sloping to 35" in diameter at the top. Ensure that the ground at the bottom is level and solid (we used play sand from the hardware store in the bottom of the hole to create a nice "level" surface).

2. Place the basin into the hole, with the power cord cut-out facing toward the power source. Level, moving earth or sand around if necessary.

3. Set the round support "trunk" into the circular receptacle in the center of the basin and align the tubing cut-outs.

4. Place the pump into the basin, running the power cord through the cord cut-out.

5. Cut a length of tubing long enough to reach from the bottom of the basin to the top of the water feature. Run the tubing through the center hole in the top of the support and out the tubing cut-outs, then connect it to the pump outlet fitting. See last page for further instruction on the tubing.

6. Install the 6 top plates.

7. Place your Stone Forest water feature on top of the basin in the center, on the section of the support "trunk" that's slightly higher than the plates.

8. Pull the hosing through the center core-drilled hole in the fountain stone. You'll notice that there is space left around the 1.25" drilled hole and the either 1/2" or 5/8" diameter flexible garden hose that connects to your pump below. To fill the space around the hose and fit it snugly into the top of the core-drilled hole, we wrap the top part of the hose with a strip of pond liner and electrical tape (see images on last page for reference).

9. Cover the reservoir with smooth river pebbles (or whatever you choose to use to conceal the basin). For this kit, we usually recommend Qty (4) 75-lb bags of the dark river pebbles.

10. Fill your reservoir with water, plug the pump in, and VOILA! Grab a lounge chair and prepare to be relaxed by the soothing sounds of your new fountain.

o.....o

Little GIANT.

Franklin Electric Co., Inc. P. O. Box 12010 Oklahoma City, OK 73157-2010 405.947.2511 • Fax: 405.947.8720 www.LittleGiantPump.com CustomerService-WTS@fele.com

DISAPPEARING WATER FEATURE BASIN • CUVETTE POUR JEUX D'EAU EN CIRCUIT FERMÉ • CUBETA PARA FUENTE DE AGUA QUE DESAPARECE

INTRODUCTION

This instruction sheet provides you with the information required to safely own and operate your Little Giant product. Retain these instructions for future reference.

The Little Giant product you have purchased is of the highest quality workmanship and material, and has been engineered to give you long and reliable service. Little Giant products are carefully tested, inspected, and packaged to ensure safe delivery and operation. Please examine your items carefully to ensure that no damage occurred during shipment. If damage has occurred, please contact the place of purchase. They will assist you in replacement or repair, if required.

READ THESE INSTRUCTIONS CAREFULLY BEFORE ATTEMPTING TO INSTALL, OPERATE, OR SERVICE YOUR LITTLE GIANT PRODUCT. KNOW THE PRODUCT'S APPLICATION, LIMITATIONS, AND POTENTIAL HAZARDS. PROTECT YOURSELF AND OTHERS BY OBSERVING ALL SAFETY INFORMATION. FAILURE TO COMPLY WITH THESE INSTRUCTIONS COULD RESULT IN PERSONAL INJURY AND/OR PROPERTY DAMAGE!

INSTALLATION (DFB36)

Refer to Figure 1 and the following instructions to install the DFB36 basin:

- Dig a hole 9" deep, 30" in diameter at the bottom, and sloping to 35" in diameter at the top. Ensure that the ground at the bottom is level and solid.
- Place the basin into the hole, with the power cord cut-out facing toward the power source.
- Set the support into the circular receptacle in the center of the basin and align the tubing cut-outs.
- Place the pump into the basin, running the power cord through the cord cut-out.
- 5. Cut a length of tubing long enough to reach from the bottom of the basin to the top of the water feature.
- Run the tubing through the center hole in the top of the support and out the tubing cut-outs, then connect it to the pump outlet fitting.
- 7. Install the six top plates.
- Refer to the water feature owner's manual to complete the installation.

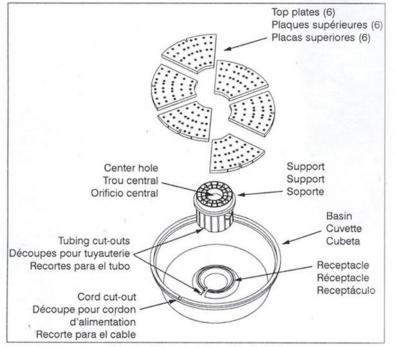


Figure • Figure • Figura 1 - DFB36



INSTALLAT






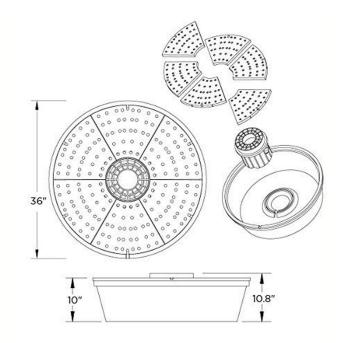


Diagram of Simple Recirculating Fountain Installation

A flexible hose is fed through the hole that has been drilled through the fountain. The plug is friction fit at the top of the fountain. The end of the hose connects to the submersible pump seated in the reservoir.





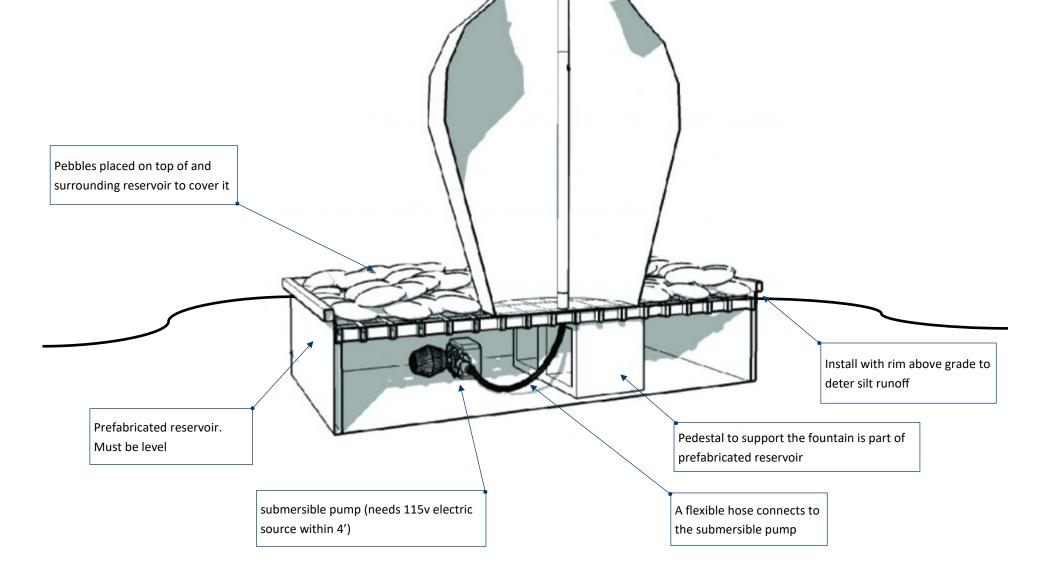

Supplied hose

Instructions to connect the hose to the submersible pump for your fountain:

• Make sure that your fountain is in place and ready.

• Take the provided hose and feed it down through the center drilled hole in the stone fountain. The hole is approximately 1.25" in diameter, which will leave space around the hose. There is a plug on one end which will friction fit at the top of the fountain drilling. Depending on the size of your pump, you will have been supplied either a 1/2" or 5/8" diameter hose.

- We wrap one end of the hose with a strip of pond liner and electrical tape to ensure a tight fit at the top of the drilled hole. If the plug is too small to stay in place, you may need to remove the electrical tape and add some pond liner then retape to increase the diameter.
- Finally, connect the end of the hose in the reservoir to the submersible pump sitting on the floor of the reservoir.



steps to creating the plug end of the hose

stoneforest.com