

AXIOM™ Dual-Voltage Thermal Carafe Coffee Brewer

ITEM#		
PROJECT		
 DATE		



Model AXIOM-DV-TC

(thermal carafe sold separately)
Dimensions: 17.9" H x 9" W x 18.5" D
(44.8cm H x 22.9cm W x 47cm D)

Features

AXIOM Dual-Voltage Thermal Carafe Coffee Brewer

- Easily convertible by flipping a switch to:
 - 120 volt, 12.5 amp
 - 120/208 volt, 13 amp
 - 120/240 volt, 15 amp
- Brews 4.2 to 7.5 gallons (15.7 to 28.4 litres) of perfect coffee per hour.
- Accepts thermal carafe up to 8.5" tall (21.6 cm).
- Use in quick turn environments where high quality coffee is continuously refreshed.
- · Adjusts automatically to varying water pressure.
- For high lime areas, BrewLOGIC[™] technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARD™ technology simplifies brewer programming with a LCD display. Set brew level, pulse brew, cold brew lock-out and tank temperature from the front of the machine.
- · Electronic diagnostics and built in tank drain make service easier.
- · Ensures coffee brew quality with cold brew lock out capability.
- SplashGard® funnel deflects hot liquids away from the hand.
- Coffee extraction controlled with pre-infusion, pulse brew and digital temperature control.
- Energy-saver mode reduces tank temperature during idle periods.
- · Hot water faucet.

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQ-17-TL

Product No.: 30200.1000

Dimensions:

 $12\frac{7}{16}$ " H x $2\frac{1}{2}$ " W x 3" D 31.6 cm H x 6.35 cm W x 7.62 cm D

Easy Clear® ED-17-TL

Product No. : 30201.1001 Dimensions: $8\frac{1}{4}$ " H x $2\frac{5}{16}$ " Dia.

20.95 cm H x 5.87 cm Dia.



Thermal Carafe

Product No.: 18022.6002 Capacity 1.9 liter (64 oz) Dimensions: 8"H x 6.4"W x 8.2"D (20.3cm H x 16.3cm W x 21cm D)



Orange (Decaf) Brew-Thru Stopper

Product No.: 18022.7009 Dimensions: 8"H x 6.4"W x 8.2"D (20.3cm H x 16.3cm W x 21cm D)



Paper Filter Pack
Product No.: 20115.6000
Packed per case: 1,000
Dimensions: 4½" Base x 2¾" Sidewall
10.8 cm Base x 6.98 cm Sidewall

Model

Agency Listing

AXIOM-DV-TC

Dimensions & Specifications





Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic ft³/m³	Weight lbs/kg	Cord Attached
AXIOM-DV-TC	38700.6011	120	12.3	1425	1475	4.5 gal/ 17.1 liter	4.3/.122	30/ 13.6	Yes
		120/208	13.0	2620	2670	7.5 gal/ 28.4 liter			
		120/240	15.0	3500	3550	7.5 gal/ 28.4 liter			


Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: If wired for 120V, requires 2-wires plus ground service rated 120V, single phase, 60 Hz.

If wired for 120/208V or 120/240V, requires 3-wires plus ground service rated 120/208V or 120/240V,

single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Supplied with 1/4" male flare fitting.

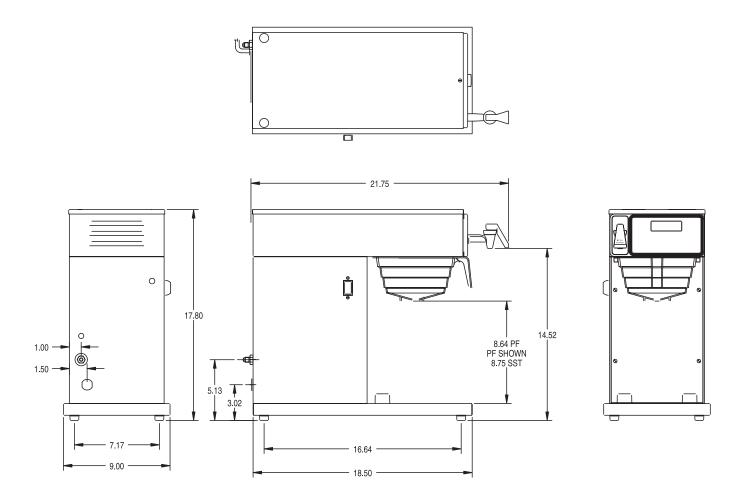

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com