



Make: Subaru

Model: 2015+ WRX/STI

Application: 3-Piece Front Splitter

PACKAGE CONTENTS				TOOLS	
QTY		QTY			
1	Front Splitter - Center Piece			Flathead Screwdriver 1/2" Wrench 3/16" Hex Key 3/8" Drill Bit	
1	Front Splitter - Side Piece				
10	5/16"-18 x 1" Buttonhead Screw				
10	5/16"-18 Hex Nut				
10	5/16" Split Lock Washer				
10	5/16" Flat Washer				

INSTALLATION INSTRUCTIONS



Remove the (3) indicated clips and small splash guard piece.

1



Remove the (2) indicated clips on the bumper cover.

2



Install center piece using (2) 5/16" Buttonhead Screws, (2) Washer, (2) Lock Washer, and (2) Hex Nut.

3



Drill out the (2) outer holes with 3/8" Drill Bit and fasten with (2) 5/16" Buttonhead Screws, (2) Washers, (2) Lock Washers, and (2) Hex Nuts.

4

DISCLAIMER FOR RALLY INNOVATIONS PRODUCTS: Buyers assume all risk and liability whatsoever for the installation and the use of Rally Innovations products. Rally Innovations products are sold as decorative accessories and should not be relied upon as protection for the vehicle or occupants in the event of a collision or roll over. Vehicles equipped with a supplemental restraint system (air bag) deployed by impact should not be modified by any aftermarket Light Bar or Skid Guard without first consulting the vehicle manufacturer. Rally Innovations, a subsidiary of Pentech Automotive assumes no liability for injury, loss, incidental or consequential damages in the event of a collision or roll over.



Remove indicated Plastic Clips.

5



Attach side pieces with (1) 5/16" Buttonhead Screw, (1) Flat Washer, (1) Lock Washer, (1) Hex Nut, and (1) Plastic Clip each.




Check alignment and fitment.
NOTE: Center piece rests on top of side pieces.

6



Drill out the indicated holes and attach with (2) 5/16" Buttonhead Screws, (2) Flat Washers, (2) Lock Washers, and (2) Hex Nuts.

8

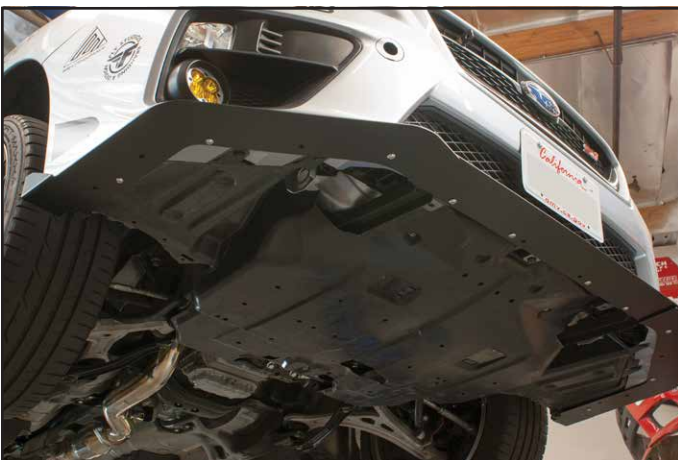

Tighten all hardware and reinstall all plastic clips.
Optional: Drill remaining holes and fasten with 5/16" hardware (not included).

8