



Suction and delivery ~ Multipurpose

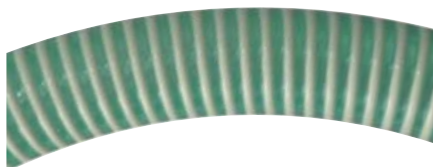

SPIRABEL® LD

+60
-15
°C



- 1 White spiral in rigid and shock-proof PVC
- 2 Wall in soft and transparent PVC. Inner and outer smooth

APPLICATIONS

- Suction and delivery light duty
- Watering
- Small pumps
- Seed drills

SECTORS OF ACTIVITY

- Agriculture
- Industry

Flexible hose reinforced with a white shock-proof PVC spiral

in a soft and transparent PVC wall. Light duty.

Marking: Spirabel LD Ø inn. [batch number]

ADVANTAGES

Spirabel LD is a very light, flexible and economic hose. Its inner wall is smooth to reduce flow losses. Its transparency allows observation of transferred products.

CONNECTORS

Symmetrical connectors (Guillemin or Storz) with band collars thanks to the smooth cover. We recommend checking before assembly that the fittings cannot harm the inner wall.

CHEMICAL RESISTANCE

See table pages 89 to 92 column A.

Warning

Spiral hoses have in general an elongation under pressure that can be important when temperature is above 40°C. This has to be considered before installation. We remain at your disposal for any question on this issue.

 mm	 mm	 mm	 g/m	 Bar	 mbar	 mm	Green wall		
							25 m	30 m	50 m
20	+/- 0,6	2,4	220	18	6	600	80	137316	137315
25	+/- 0,6	2,4	270	15	5	500	105	137329	137331
32	+/- 0,6	2,5	350	15	5	500	135	137356	137357
38	+/- 0,6	2,8	460	15	5	500	160	137371	137373
40	+/- 0,6	2,9	500	15	5	500	180	134376	134374
50	+/- 0,6	3,3	710	12	4	500	230	137413	137415
63	+/- 1,0	3,5	870	12	4	500	265		134405
75	+/- 1,0	3,8	1000	12	4	500	315	134421	
102	+/- 1,0	4,2	1870	9	3	500	428	134489	

**NEW
DIAMETERS**