# **STL200W**



STEALTH Sensor with special 200° detection pattern to provide wide coverage side	
to side. Excellent for building perimeter protection. Lens masks allow customization	

f detection zone.

Color: White

Weight: 1.1 lbs

# **Technical Specifications**

### Listings

UL Listing:

Suitable for wet locations

## Electrical

**Power Consumption:** 

1W

Surge Protection:

Withstands up to 6000 volts

### Wall Switch Manual Override:

Two flip logic prevents activation by momentary power outages. Override resets to auto at dawn. No extra wiring needed.

### **RF Immunity:**

Circuits fully shielded for maximum radio frequency immunity

### Voltage:

120 Volts AC 60 Hertz

### Switching Capacity:

1000 watts incandescent @ 120 volts, 8 amps

### **Sensor Characteristics**

### Time Adjustment:

5 seconds to 12 minutes

Wide Sensitivity Control:

Adjustable from 100% to 30%

Advanced Detection Logic:

Minimizes false triggers

### **Photoelectric Control:**

Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications.

## Detection:

200° view

### Construction

### **Temperature Compensation:**

Sensitivity adjusts automatically for consistent detection in hot and cold ambient temperatures

### Horizontal Lock, No-tool Joints:

Keeps sensing pattern level for fast, error-free installation

# Project: Type: Prepared By: Date:

#### Floodlights:

Precision die cast aluminum. 1/2" NPS threaded arm with serrated locking swivel fits all standard mounting boxes and covers.

### Lens Mask:

Customized press apply lens mask included to reduce coverage easily

### LED Characteristics

### LED Detection Indicator:

Shows when sensor is detecting in daytime and glows red at night for "on-guard" deterrence

### **Color Matched Lens:**

Dark lens with bronze units, white lens with white units

### Other

### Warranty:

10 year sensor warranty


# **STL200W**

# **Technical Specifications (continued)**

### Other

### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

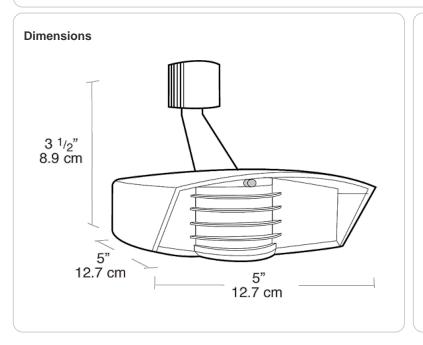

### Features

Temperature compensation Radio frequency immunity 6000 volt surge protection LED detection & "on guard" indicator Color matched vandal resistant lens and grill Protected manual override with auto reset Can be wired in parallel