




PRODUCT SPECIFICATIONS

PROJECT:	
MODEL #:	
LAMP(S):	
NOTES:	

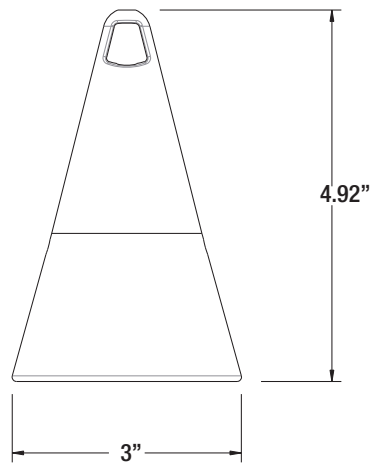

Specifications:

- Marine grade A360 alloy construction
- High temperature silicone o-rings
- 15' direct burial cable
- AMC - Anti-Moisture Connections
- 2W max. LED lamp / 20W max. halogen
- Bronze finish
- E-Shield™ coating process
- Limited 10 year warranty

Light Distribution Cones:

LED-2W-M127K-12

Illuminance at a Distance			
	Center Beam fc	Beam Width	
4.3ft	15.9 fc	2.2 ft	2.2 ft
8.7ft	3.88 fc	4.4 ft	4.5 ft
13.0ft	1.74 fc	6.6 ft	6.7 ft
17.3ft	0.98 fc	8.8 ft	8.9 ft
21.7ft	0.62 fc	11.1 ft	11.2 ft
26.0ft	0.43 fc	13.3 ft	13.4 ft

■ Vert. Spread: 28.6°
■ Horiz. Spread: 29.0°



UL 2108:2004 R12.07
CSA C22.2.9.0-96 (R2006)

Unique Lighting Systems® reserves the right to modify the design and/or construction of the fixture shown without further notification.



Fixtures

Part Number

ORBI-NL-BK
ORBI-NL-BZ
ORBI-L227-BK
ORBI-L227-BZ

Description

ORBITAL, ALLOY, NL, BK
ORBITAL, ALLOY, NL, BZ
ORBITAL, ALLOY, LED227K, BK
ORBITAL, ALLOY, LED227K, BZ

Accessories

Part Number

N/A

Description

Finishes

Standard Finish

BZ - Bronze
BK - Black
TT - Tucson Tan