

Product Specifications



MODEL
SFT-2000

CATEGORY
Exhaust


DESCRIPTION
20" direct-drive shutter fan.

FEATURES

- Rugged corrosion-proof PVC shutter and powder-coated (over zinc) steel guard.
- Aluminum fan blade.
- Totally enclosed, maintenance free, energy efficient motor.

DIMENSIONS

A = 22-3/4" B = 22-3/4" C = 20" D = 20"
E = 6" F = 4-1/2" G = 1/8" H = 1-3/4"
Rough-in Opening 20-5/8" x 20-5/8"

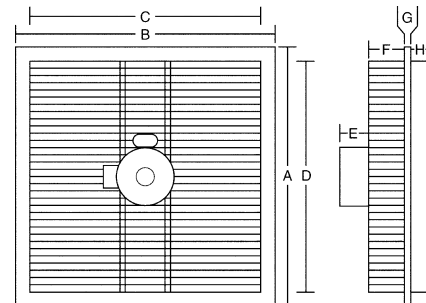

PERFORMANCE

CFM 3122 at 0.05" static pressure
Test Number N/A

MOTOR

CS103 1/3 HP 1 Speed 60 Hz 1 Phase 115 / 230 Volts
Insul = F TEAO 1725 RPM SF = 1 Max 40° C 3.8 / 1.9 Amps

BLADE

AFB-184SF 4 Wings 1/2" Bore Aluminum

SHIPPING

31 lbs 27" x 26" x 16" UPS = Yes Pallet Quantity = 16



800-779-3267

sales@schaefervent.com • www.schaefervent.com

*Test data, performance, energy consumption and other specifications are based on results in a controlled environment.
Actual results will vary. Product specifications subject to change. ©2011 Schaefer Ventilation Equipment 11-1-11*