




Serie **2 vie**

Articolo **8P050200 - 8P050300**

Flanged PN16 stainless steel AISI 316 CF8M ball valve, full bore Split Body type [Valpres art. 765000] ISO 5211 pad direct, Fire Safe, Antistatic Device, EN558 basic series 27 face to face dimension.

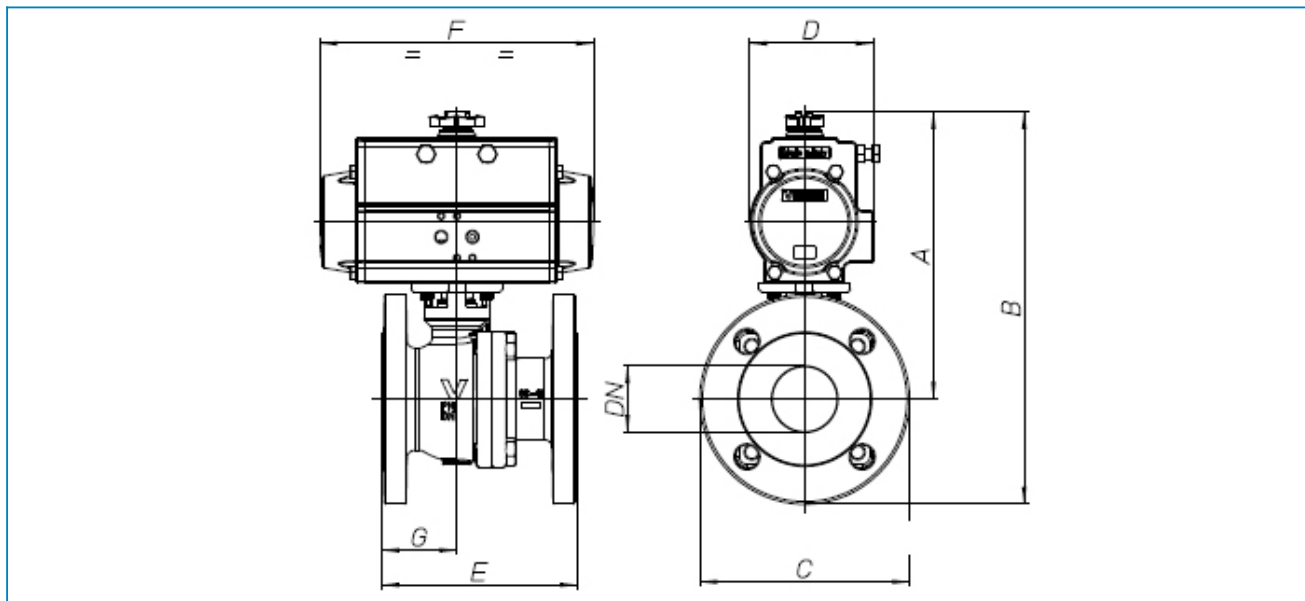

Art. 8P050200

VALVOLA CON ATTUATORE DOPPIO EFFETTO VALVE WITH DOUBLE ACTING ACTUATOR

DN	25	32	40	50	65	80	100
PN	40	40	40	40	16	16	16
A	160	173	193	221	256	265	296
B	217	243	268	303	349	365	402
C	115	140	150	165	185	200	220
D	71	71	81	95	106	106	123
E	125	130	140	150	170	180	190
F	141	141	164	210	241	241	275
G	53	55	52	58	63	76	80
ACT.	DA52	DA52	DA63	DA75	DA85	DA85	DA100
KIT	RI4579	RI4579	RI4581	RI4582	RI4584	RI4584	RI4586

Art. 8P050300

VALVOLA CON ATTUATORE SEMPLICE EFFETTO VALVE WITH SPRING RETURN ACTUATOR

DN	25	32	40	50	65	80	100
PN	40	40	40	40	16	16	16
A	171	184	211	235	303	312	339
B	229	254	286	318	396	412	449
C	115	140	150	165	185	200	200
D	81	81	95	106	137	137	148
E	125	130	140	150	170	180	190
F	164	164	210	241	333	333	372
G	53	55	52	58	63	76	80
ACT.	DA63	DA63	DA75	DA85	DA115	DA115	DA125
KIT	RI4580	RI4580	RI4582	RI4583	RI4585	RI4585	RI4587

