


PROJECT : \_\_\_\_\_  
 SALE : \_\_\_\_\_



Product



Dimension

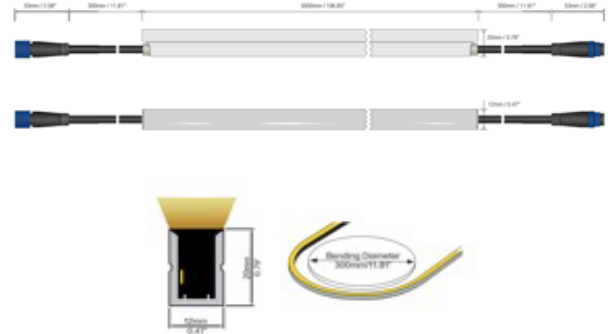

Specification

SERIES : JR-LEDLINE-FLEXSIDE  
 ITEM CODE : JR-LEDLINE-FLEXSIDE-930-10W-WW-5M  
 DESCRIPTION : LEDLINE FLEX SIDE  
 SIZE : W12 X L5000 X H20 (MM) / 1 ROLL (5 METERS)  
 INSTALLATION : SURFACE MOUNTED WITH PROFILE  
 DRILL SIZE : -  
 WEIGHT : -  
 MATERIAL : SILICONE  
 COLOR : WHITE  
 REFLECTOR : -  
 DIFFUSER : SILICONE RUBBER  
 IP RATING : 68



LIGHT SOURCES : LED SMD2835 (144LEDs/M)  
 VOLT : 24V DC  
 WATTS : 10 W/M  
 LUMEN POWER : 506 LM/M  
 CCT : 3000K  
 CRI : >90  
 BEAM ANGLE : -  
 AMBIENT TEMP. : -20°C TO +45°C  
 LIFETIME : 50,000 Hrs



CONTROL GEAR : -  
 ACCESSORIES : PLEASE READ PAGE2  
 REMARKS : THE PRODUCT CAN BE CUT ONCE ONLY AND FINISHED WITH END CAP&GLUE, THEN IP RATING DROPS TO IP67. CAN BE CONNECTED UP TO 16M. PER ONE RUN.

Head office 299/1 (Ekamai) Klongton-Nua, Wattana, Bangkok Thailand 10110

Tel (02) 392 6371-5 FAX (02) 392 1839 Email info@lamptitude.net www.lamptitude.net

PROJECT : \_\_\_\_\_

SALE : \_\_\_\_\_

# Lampitude

## OPTIONAL ACCESSORIES



Aluminium Profile  
SPAC-FLEXSIDE-ALU-1M  
Dimension: 1000x14.4x21.4mm/  
39.37"x0.57"x0.84"(LxWxH)  
Material: aluminium  
Color: silver



IP68 Connector - WHT  
SPAC-CONNECTOR-0.3M  
Wire gauge: 1.0mm<sup>2</sup>/18AWG  
Protection: IP68(Mated)  
Mechanical operation: > 500  
mating cycles  
Contact: brass, gold plating  
Material of housing: PA



Curved Profile  
SPAC-FLEXSIDE-ALU-CURVED  
Dimension: 500x26.4x18mm/  
19.68"x1.04"x0.71"(LxWxH)  
Material: stainless steel  
Color: silver



IP68 Extension Connector -  
WHT  
SPAC-CONNECTOR-1M  
Description: IP68 Male and  
Female connector with 1M  
cable  
Wire gauge: 1mm<sup>2</sup>/18AWG  
Material of housing: PA



Mounting Clips  
SPAC-FLEXSIDE-CLIP  
Dimension: 15x13.8x12.8mm/  
0.59"x0.54"x0.5"(LxWxH)  
Material: stainless steel  
Color: silver  
Each meter of LED strip needs  
3 clips + 3 screws + 2 end caps

Head office 299/1 (Ekamai) Klongton-Nua, Wattana, Bangkok Thailand 10110

Tel (02) 392 6371-5 FAX (02) 392 1839 Email [info@lampitude.net](mailto:info@lampitude.net) [www.lampitude.net](http://www.lampitude.net)