


Grade 30 Short Link Chain – MSCSL



- Mild steel.
- Self colour and hot dipped galvanised finish.
- Conforms to DIN 766.
- Not to be used for lifting applications.
- Certification available [2.1](#) [2.2](#)

Product Code		Dn	P	B	W.L.L.	M.P.F.	M.B.F.	Weight
Self Colour	Galvanised	mm	mm	mm	kgs	kN	kN	kgs/mtr
MSCSLSC4	MSCSLG4	4	16	13.6	200	5	8	0.32
MSCSLSC5	MSCSLG5	5	18.5	17	320	8	12.5	0.5
MSCSLSC6	MSCSLG6	6	18.5	20.4	400	10	16	0.8
MSCSLSC7	MSCSLG7	7	22	23.8	630	16	25	1.1
MSCSLSC8	MSCSLG8	8	24	27.2	800	20	32	1.4
MSCSLSC9	MSCSLG9	9	27	30.6	1,000	25	40	1.8
MSCSLSC10	MSCSLG10	10	28	36	1,250	32	50	2.3
MSCSLSC11	MSCSLG11	11	31	40	1,600	40	63	2.7
MSCSLSC13	MSCSLG13	13	36	47	2,000	50	80	3.9
MSCSLSC14	MSCSLG14	14	41	50	2,500	63	100	4.4
MSCSLSC16	MSCSLG16	16	45	58	3,200	80	125	5.8

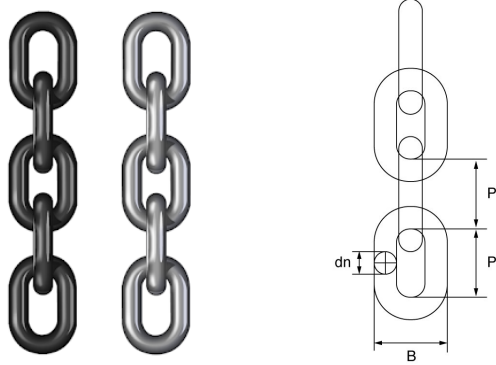