


Green Pin® Swivel Eye/Jaw – GPSEJ

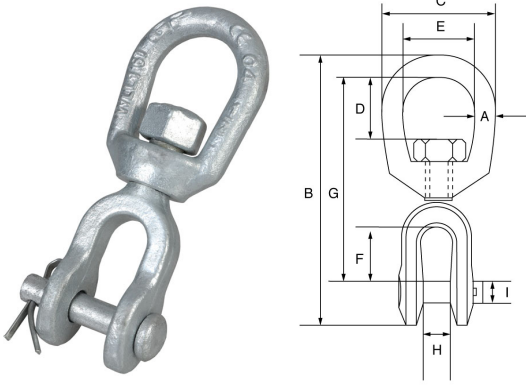

- High tensile steel, quenched and tempered.
- Hot dipped galvanised finish.
- Conforms to US Fed. Spec. RR-C-271 type VII class 2.
- Minimum breaking load is 5 times the W.L.L.
- Marked with CE, W.L.L, manufacturers ID, size and traceability code.
- Certification available **2.1** **MTC** **DoC**

G-7723

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPSEJ6	0.39	6	84	32	18	19	22	67	12	6	0.11
GPSEJ8	0.57	8	98	41	21	25	22	75	13	8	0.17

Product Code	W.L.L. t	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight kgs
GPSEJ10	1.02	10	121	51	24	32	27	92	16	10	0.32
GPSEJ13	1.6	13	154	64	33	38	33	114	19	13	0.65
GPSEJ16	2.4	16	186	76	40	44	38	135	24	16	1.12
GPSEJ19	3.3	19	211	89	44	51	44	154	29	19	1.76
GPSEJ22	4.5	22	242	102	52	57	52	178	30	22	2.66
GPSEJ25	5.7	25	290	114	59	64	71	217	44	29	4.46
GPSEJ32	8.2	32	329	143	68	80	71	230	52	35	7.14
GPSEJ38	20.5	38	501	178	106	102	113	364	73	50	24.8