


Wire Rope Grip BS EN Style – Type A – WRGEN

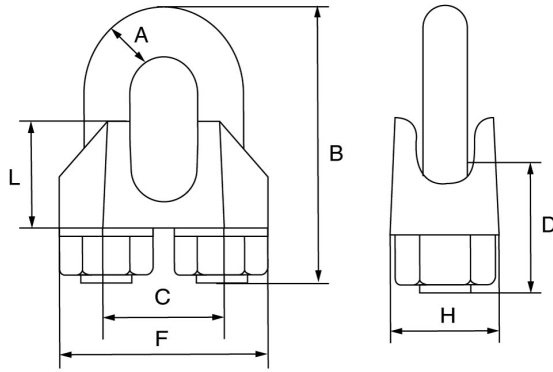

- Malleable steel ungrooved bridge. Mild steel u-bolt and nuts.
- Electro galvanised finish.
- Meets the performance requirements of BS EN 13411 Part 5 Type A (Formerly DIN 1142). 13mm is additional and proportional to the standard.*
- Marked with size on bridge and manufacturers ID on bridge and U bolt.
- Certification available **2.1**

Product Code	Rope Dia mm	A mm	B mm	C mm	D mm	F mm	H mm	L mm	Weight kgs/100
WRGEN5	5	5	25	12	13	25	13	13	2.1
WRGEN6.5	6.5	6	32	14	17	30	16	14	4
WRGEN8	8	8	41	18	20	39	20	18	8.2
WRGEN10	10	8	46	20	24	40	20	21	9.2
WRGEN12	12	10	56	24	28	50	24	25	25
WRGEN13	13	12	64	27	30	55	28	29	27.5
WRGEN14	14	12	66	28	31	59	28	30	35
WRGEN16	16	14	76	32	35	64	32	35	43

Product Code	Rope Dia	A	B	C	D	F	H	L	Weight
	mm	mm	mm	mm	mm	mm	mm	mm	kgs/100
WRGEN19	19	14	83	36	36	68	32	40	49
WRGEN22	22	16	96	40	40	74	34	44	68
WRGEN26	26	20	111	46	50	84	38	51	117
WRGEN30	30	20	127	54	55	95	41	59	140
WRGEN34	34	22	141	60	60	105	45	67	213
WRGEN40	40	24	159	68	65	117	49	77	268