


Cable Engineered by Draka
600 Volt, Tray Cable
PVC/Nylon Insulated Circuit Conductors
Overall PVC Jacket

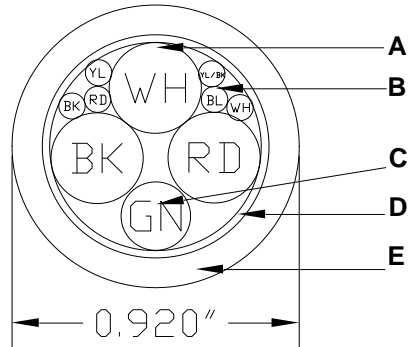

Components

- A: (3) - #4 AWG Class C stranded, soft drawn, bare copper circuit conductors w/40 mils (1.02 mm) heat and moisture resistant, polyvinyl chloride (PVC) insulation and jacketed w/ 6 mils (0.15 mm) nylon applied directly to the surface of the insulation.
- B: (6) - #18 AWG Class K stranded, soft drawn, bare copper conductors w/15 mils (0.38 mm) heat and moisture resistant, polyvinyl chloride (PVC) insulation and jacketed w/ 4 mils (0.10 mm) nylon applied directly to the surface of the insulation.
- C: (1) - #8 AWG Class C stranded, soft drawn, bare copper grounding conductor w/30 mils (0.76 mm) heat and moisture resistant, polyvinyl chloride (PVC) insulation and jacketed w/ 5 mils (0.13 mm) nylon applied directly to the surface of the insulation
- D: Mylar binder tape.
- E: 80 mils (2.03 mm) of heat and moisture resistant, polyvinyl chloride (PVC) jacket.

Print Legend

(UL) E60544 POWER AND CONTROL TRAY CABLE TYPE TC-ER-JP 4 AWG (21,2 mm²) 3/C + 8 AWG (8,37 mm²) 1/C GROUND THWN CONDS & 18 AWG (0,82 mm²) 6/C TFFN CONDS 600V 75C DRY/75C WET OIL RES I SUNLIGHT RESISTANCE DIRECT BURIAL JOIST PULL GENERAC P/N 1216 "sequential footage print"

Physical Characteristics

Cable Weight: 752 lb/mft (1119 kg/km)
 Copper Weight: 475 lb/mft (707 kg/km)
 Nominal Cable OD: 0.920 in (23.4 mm)

R e v	DATE	CHANGE DETAIL				Draka Engineered Solutions One Tamaqua Blvd Schuylkill Haven PA 17972 Phone: 570-385-4381 Fax: 570-385-1092	
	0	02/03/17	New Issue				
	1						
	2						
3					Project Name:	Generac	
Approvals:		Engineering:		Final:		Part Number:	382892
Draka Cableteq USA Inc. reserves the right to modify this information without prior notification and does not make a warranty or representation of any kind, whether implied or expressed with respect to the information contained herein. Draka Cableteq assumes no risks, and will not be liable for direct or indirect, special, incidental or consequential damages, any defect or personal injury resulting from the use of this document. EngDrawing-Rev01-April07						Quote Number:	NA
						File Number:	type tc thhn-pvc 3C4 1C8 6C18 382892 GENERAC
						Page Number:	Page 1 of 2

Physical Characteristics

Conductor Color Code:

4 AWG - Black, White and Red

8 AWG - Green

18 AWG - Black, Red, Yellow, Yellow/Black, Blue and White

Jacket Color:

Orange

Electrical / Optical Characteristics

Voltage:

600V

Specifications

Conductors: ASTM B 3, ASTM B 8, ASTM B174

Insulation: ICEA S-95-658 (NEMA WC 70), ICEA S-73-532 (NEMA WC 57), UL 83 for Type THWN wires

Jacket: ICEA S-95-658 (NEMA WC 70), ICEA S-73-532 (NEMA WC 57), UL 1277

Ratings

UL THWN 600V


UL Type TC-ER-JP 600V

The insulation is acceptable for use in locations at 75 °C dry and 75 °C wet.

The cable is suitable for use in cable trays, aerial or direct burial installations.

Packaging

Bulk reels

R e v	DATE	CHANGE DETAIL				Draka Engineered Solutions One Tamaqua Blvd Schuylkill Haven PA 17972 Phone: 570-385-4381 Fax: 570-385-1092			
	0	02/03/17	New Issue						
	1								
	2								
3					Project Name:	Generac			
Approvals:		Engineering:		Final:		Part Number:	382892		
Draka Cableteq USA Inc. reserves the right to modify this information without prior notification and does not make a warranty or representation of any kind, whether implied or expressed with respect to the information contained herein. Draka Cableteq assumes no risks, and will not be liable for direct or indirect, special, incidental or consequential damages, any defect or personal injury resulting from the use of this document. EngDrawing-Rev01-April07						Quote Number:	NA		
						File Number:	type tc thhn-pvc 3C4 1C8 6C18 382892		GENERAC
						Page Number:	Page 2 of 2		