


FAT BOY REBOUNDER ASSEMBLY INSTRUCTIONS

Our video instructions provide the best guidance for setting up your 5x5 Baseball/Softball Net.
They can be viewed online at



Please call us if you have any questions or concerns at **1-855-4RUKKET**
Please read our product safety warnings before setup

Included equipment:



A. Front base with pads



B. 2 front supports



C. Pivot joint (left and right) with cotter pin



D. Top cross bar



E. Rear base with pads



F. Rear telescoping supports (left and right)



G. Rear cross support




H. Carriage bolts (x14), Metal Washers (x14), Plastic Washers (x2), Nuts (x14), Allen Wrench and Hex Wrench



I. Bungies (x74)




K. Optic Yellow Rope (2)

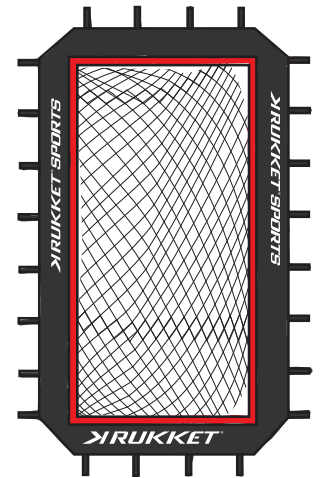

J. Net



L. Metal Stakes (4)

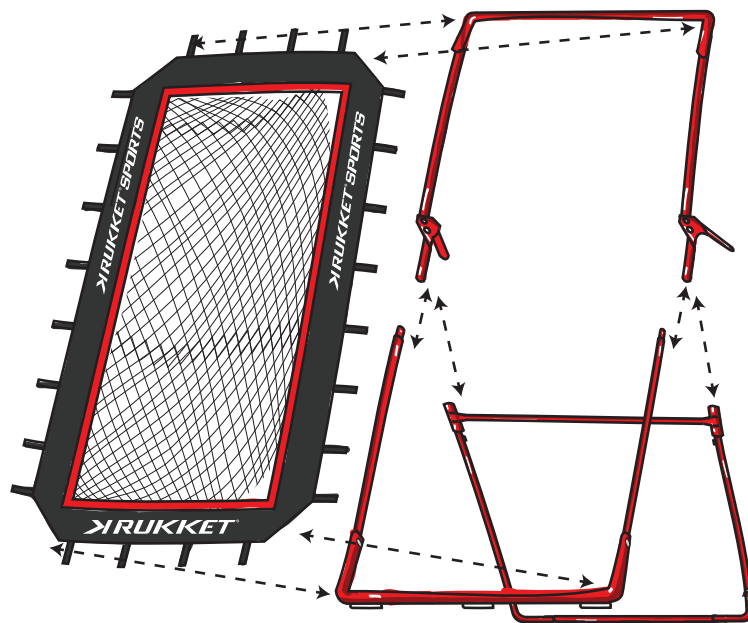

QUESTIONS? GIVE US A CALL! (1-855)-478-5538



FAT BOY REBOUNDER PRODUCT SAFETY WARNING

Our video instructions provide the best guidance for setting up your 5x5 Baseball/Softball Net.
They can be viewed online at




Please call us if you have any questions or concerns at **1-855-4RUKKET**
Please read our product safety warnings before setup




- Keep hands and fingers clear of all moving parts.
- When adjusting the angle of the rebounder using the rear telescoping supports, keep head and body clear of the rear cross support.
- Place the rebounder on a level, well drained surface. Make sure to set the rebounder up in a location where, when a ball misses the rebounder or is missed by the player on its return, the ball will not strike or cause damage to people, pets, houses, or structures.

- Children should not operate the rebounder adjustment; adjustments should be made by an adult.
- To prevent injury, children should not use the rebounder until properly instructed.
- When adjusting the angle via the Rear Telescoping Supports, do not let go of the supports until the buttons are re-engaged.
- It is important to become familiar with the way a ball reacts to the rebounder; stand at least 30 feet from the rebounder when first using it so you can become familiar with the speed and power of returned balls.
- Always check for loose or missing bolts and for damage to the bungies or netting before use. Loose bolts should be tightened.
- If there is a problem with the netting or any other part of the rebounder, please contact us at 1-855-4RUKKET

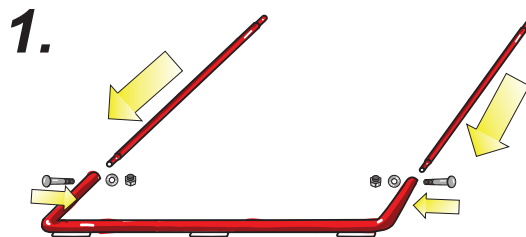

1. Attach the two **Front Supports** to the **Front Base** so that the silicone pads are angled slightly down when laying flat on the ground.

NOTE: When the rebounder is standing up, the silicone pads should be in contact with the ground.

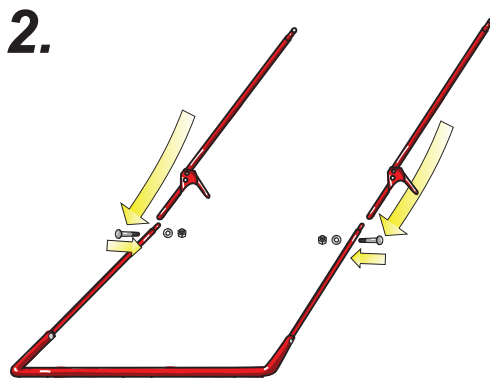


2. Attach the **Pivot Joint** to the **Front Supports**. Attach the slightly longer tube on the U-curve to each support.

NOTE: The cotter pins on the pivot point should be facing outward.


QUESTIONS? GIVE US A CALL! (1-855)-478-5538

RUKKET
SPORTS

FAT BOY REBOUNDER ASSEMBLY INSTRUCTIONS

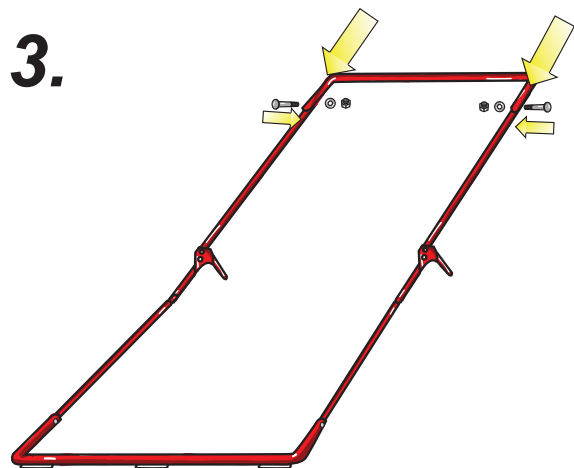


3. Attach the **Top Cross Bar** to the long tube of the **Pivot Joints**.

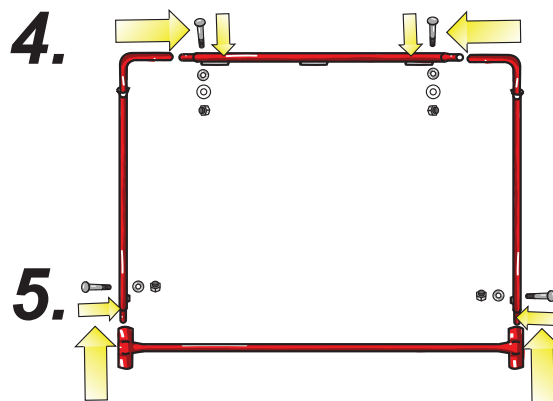


4. Attach the **Rear Base** to the two **Rear Telescoping Supports** so that the **Adjusting Buttons** face inside. Use the two **plastic washers** to ensure that the carriage bolts tighten completely.

5. Attach the **Rear Cross Support** to the **Rear Telescoping Supports**.

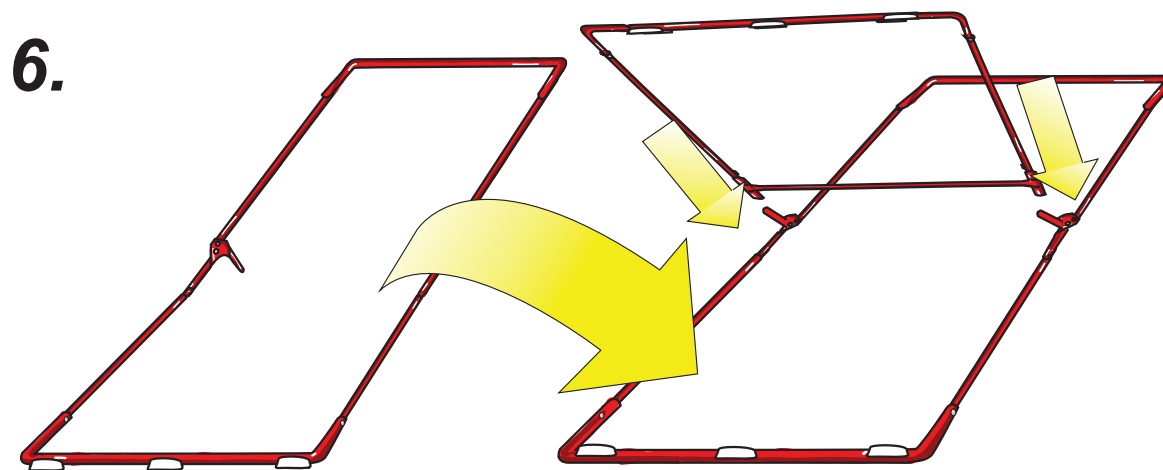

6. Attach the assembled rear support structure to the **Pivot Joint** by the slightly shorter tube on the U-Curve. The silicone pads on the **Rear Base** should be facing slightly inward so that they come in contact with the ground when the Rebounder is standing.

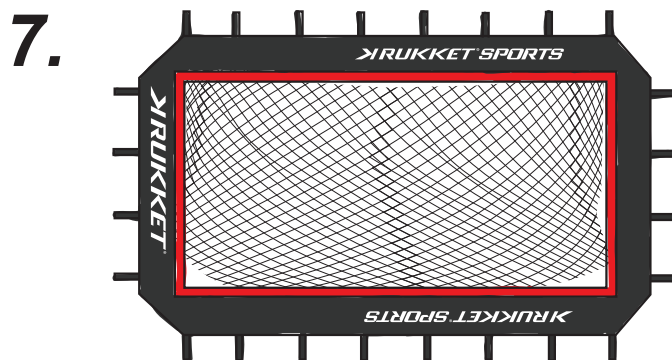

7. Stand the Rebounder up and make sure that the frame is assembled correctly before attaching the net.



Lay the net flat on the ground with the Rukket logo facing down to make sure that the attaching hooks are free of the net. The Rukket logo is the base of the net.

QUESTIONS? GIVE US A CALL! (1-855)-478-5538

RUKKET
SPORTS

FAT BOY REBOUNDER ASSEMBLY INSTRUCTIONS

8.

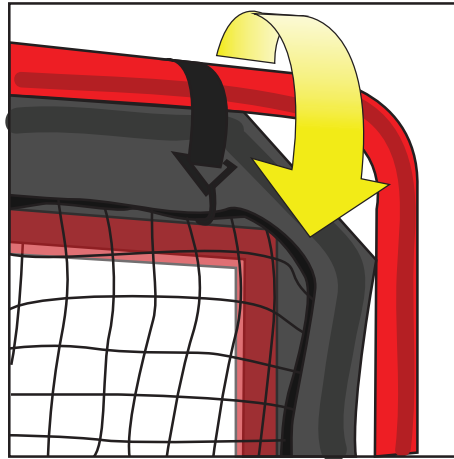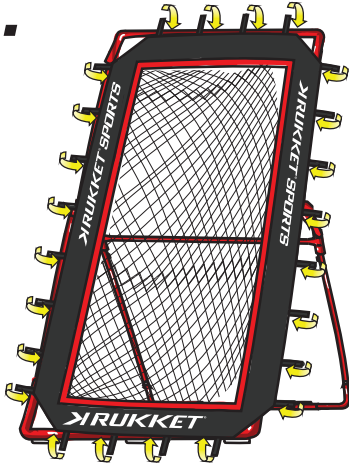


8. Drape the net over the frame so that the Rukket logo at the bottom is right-side up and wrap the attaching hooks at the top around the **Top Cross Bar** and hook them to the thick woven edge of the net.


NOTE: If the **Top Cross Bar** is too high to reach, adjust the frame to a more suitable height.

Attach the hooks down the sides and around the **Front Base** in the same manner.


9.

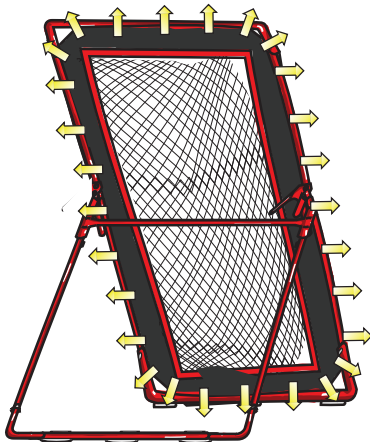


The bungies should be placed between the net's attaching hooks. Two bungies should be used on each corner and two bungies should be used on each side of the pivot joint. More bungies are included so that you can customize how powerful you want the ball return to be.

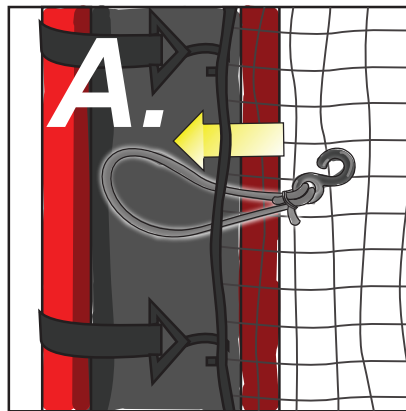


9. A. Run the doubled-up end of the **Bungee** cord through the thick woven edge of the net.

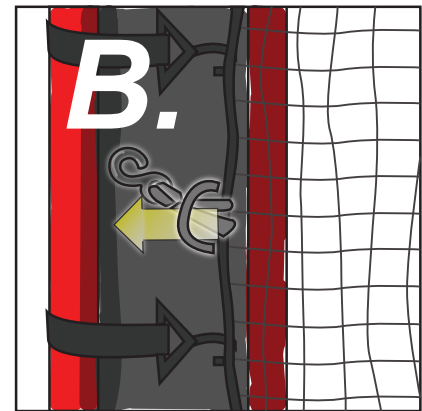

B. Run the plastic hook through the loop of the bungee to form a hitch around the net's thick woven edge.

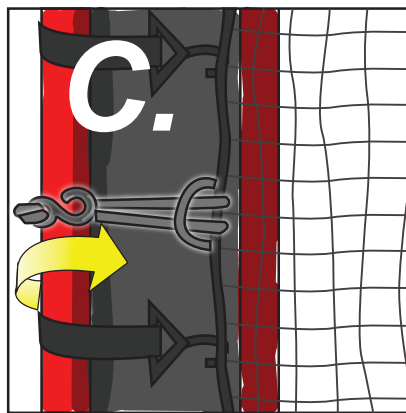

C. Pass the plastic hook in front of and around the metal frame.

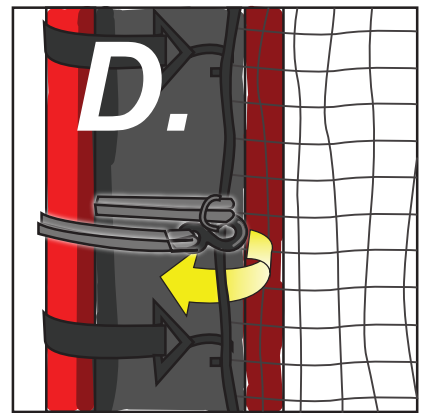

D. Hook the plastic onto the net's thick woven edge next to where the **Bungee** is hitched.


QUESTIONS? GIVE US A CALL! (1-855)-478-5538

RUKKET
SPORTS

FAT BOY REBOUNDER ADJUSTMENT INSTRUCTIONS

1.



Remove the cotter pins on the **Pivot Joint** to change the Rebounder between the flat-plane and the dual-plane configurations. Re-insert the cotter pins before using the Rebounder.

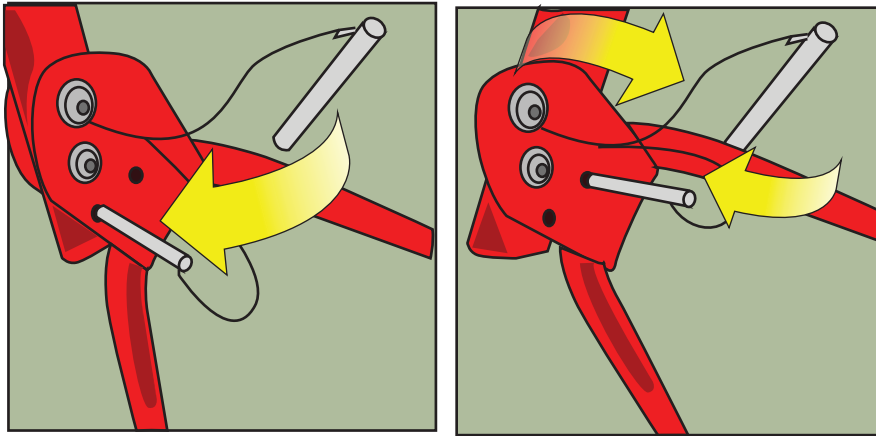

2.

To adjust the Rebounder's over-all angle, simply push both adjustment buttons on the **Rear Telescoping Supports** and select the desired angle.

Warning: When adjusting the angle via the Rear Telescoping Supports, do not let go of the supports until the buttons are re-engaged.

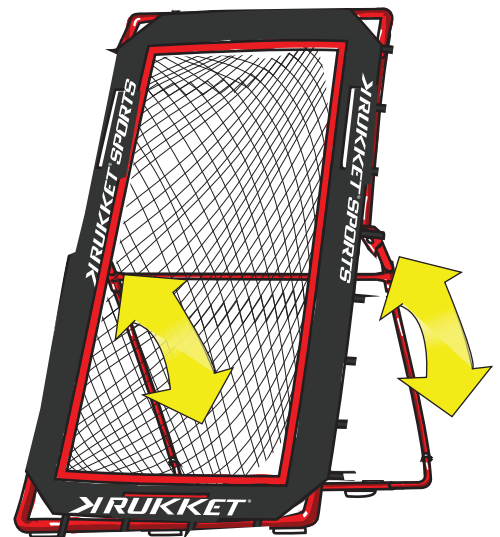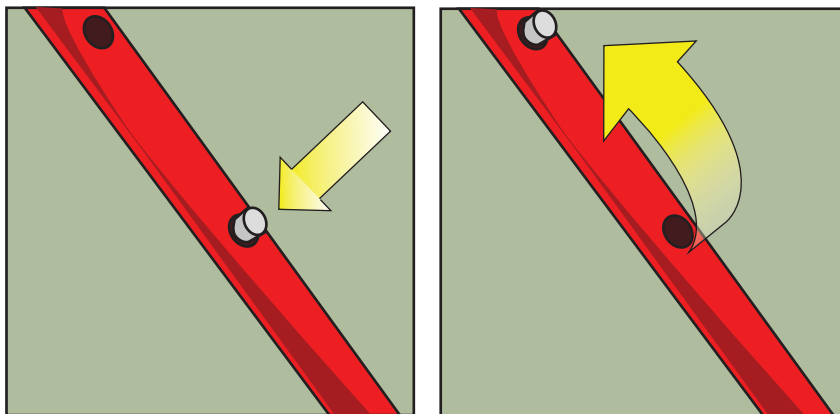

QUESTIONS? GIVE US A CALL! (1-855)-478-5538

RUKKET
SPORTS

V1