



SEMI-ELECTRIC STACKER



-
-
-

MODEL	LOAD CAPACITY	MAX LIFTING HEIGHT
A-3009	3300LBS	63 "
A-3010	3300LBS	118 "

HOW TO USE THE STACKER?


STEP 1 Turn on the key and emergency switch



- 1 Emergency switch
- 2 Key
- 3 Lifting button
- 4 Lowering button

STEP 2 Lifting and lowering by pressing the concerned button

STEP 3 Two methods to push and pull the stacker

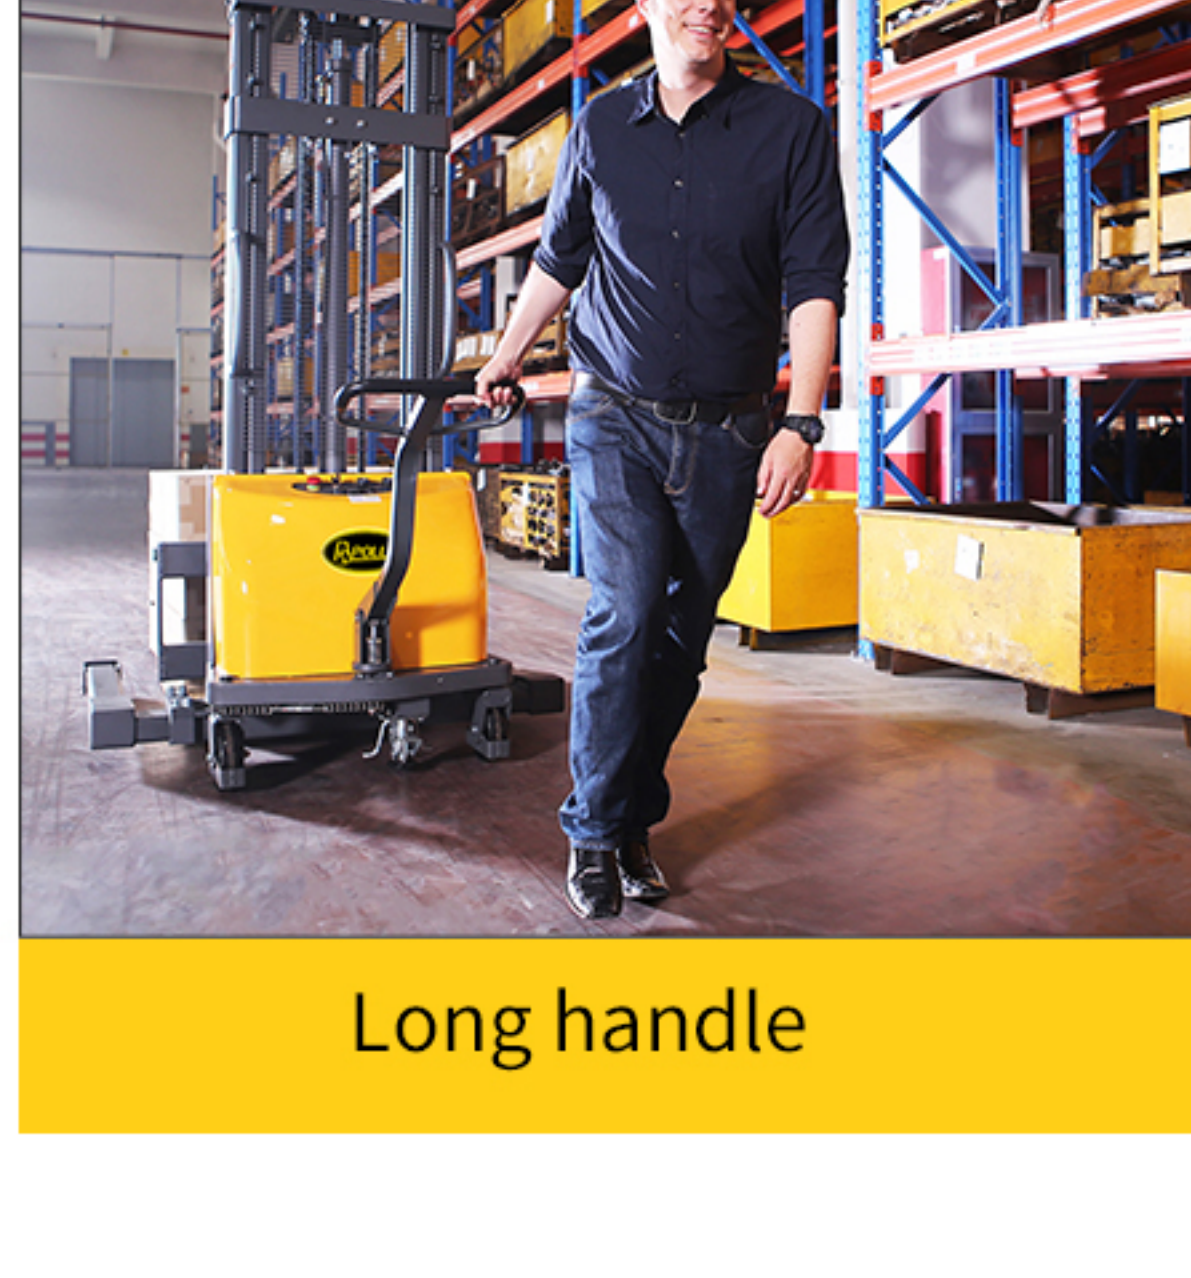


Long handle



Handrail on both sides




STACKER'S ADVANTAGES

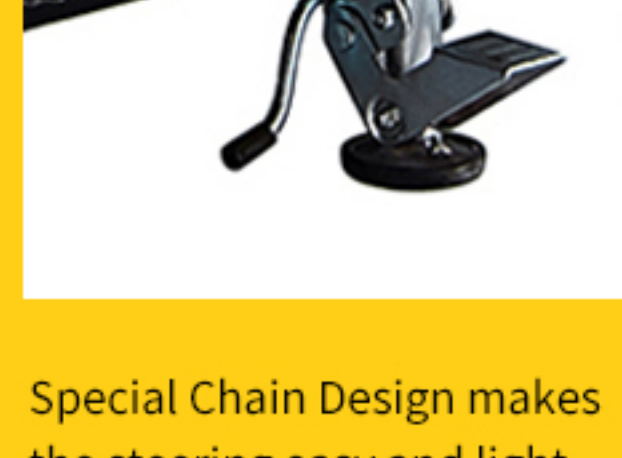

Special Chain Design makes the steering easy and light



Integrate panel design, Including lifting & lowering button, key switch, emergency switch and BDI

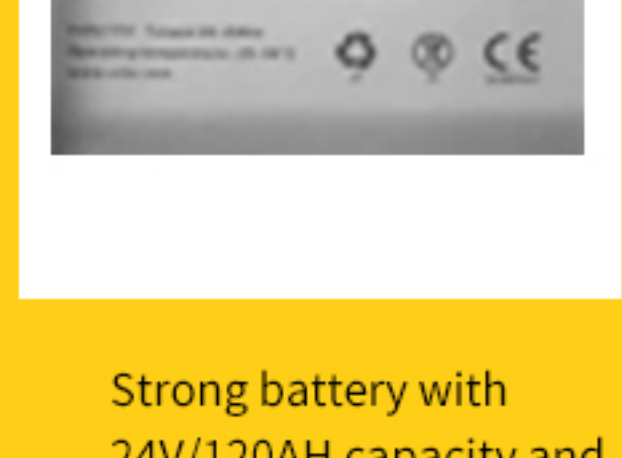

Strong battery with 24V/120AH capacity and Over charge protection



Foot pedal brake for safety and ramp usage



Rubber wrapped handle makes more comfortable operation feeling



Equipped with explosion-proof valve, against of sudden drop of forks and prevent operator from harm



Adjustable Fork width

11.6~36.6 "

Straddle legs width

44~60 "



MODEL NAME	A-3009	A-3010
Load Capacity	3300 LBS	3300 LBS
Max Lifting Height	63 inch	118 inch
Height. Mast Lower	84.4 inch	84.4 inch
Height. Mast Extended	84.4 inch	141.7 inch
Overall Length	72.2 inch	72.2 inch
Overall Width	44-60 inch	44-60 inch
Fork Dimensions	2.3*5.6*42 inch	2.3*5.6*42 inch
Lifting Speed(Laden/Unladen)	2.7/3.9 inch	2.7/3.9 inch
Turning Radius	59.3 inch	59.3 inch
Battery Type	Lead Acid	Lead Acid
Rated Voltage	24V/120Ah	24V/120Ah
Service Weight(With Battery)	1001LBS	1166LBS