

ATLANTE 115 – DECKING




INDEX

- 1. Data and documents
- 2. Description
- 3. Use
- 4. Where to use
- 5. Load tests
- 6. Specifications items

1. DATA AND DOCUMENTS


Code	Description	Dimensions (mm)	Weight (kg)	Bag / Pallet
1277-L	ATLANTE 115 - Decking	115-220	0.358	15pcs/225pcs

MATERIAL

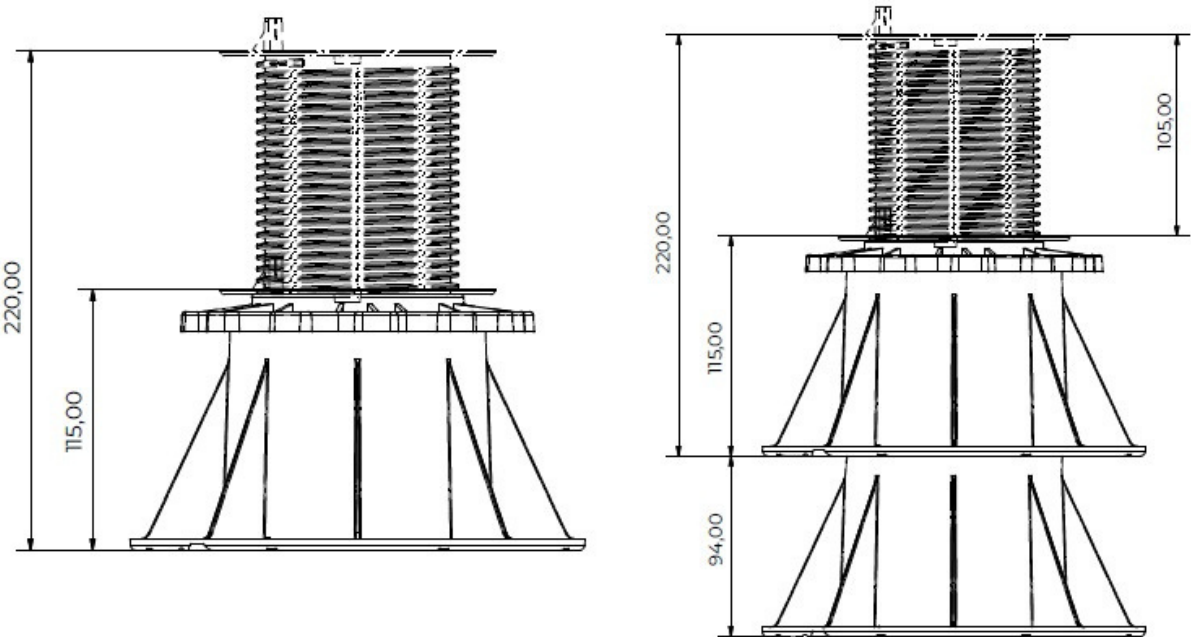

The bottom of each base is shaped so it can be connected to another base.

ATLANTE 115 – DECKING

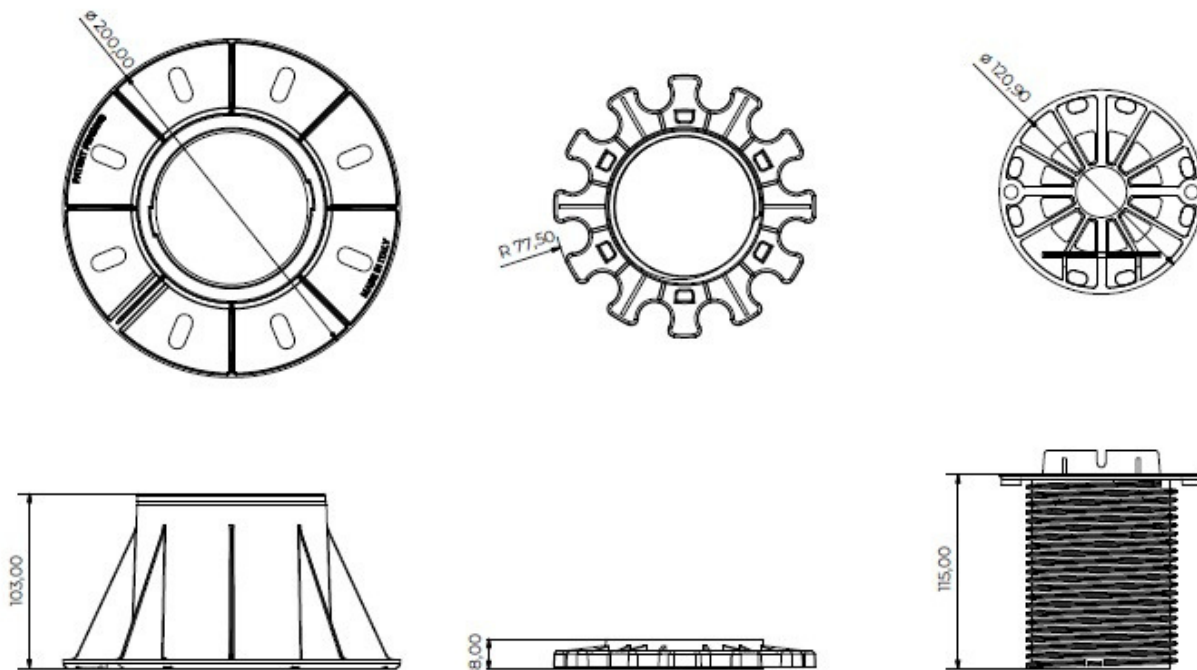

2. DESCRIPTION

ATLANTE 115 have an adjustable height from 115 to 220mm (excluding optional extensions).

The base covers an area of 314cm².

The head has a 120mm diameter and covers an area of 113cm².

The bag includes base, rotating ring and 1-winged head for wooden joists.

The base permits a correct water discharge and its bottom is shaped so it can be connected to other bases.

The product is compatible with h.100mm extensions.

3. USE

They are used in outdoor areas, terraces and shared flooring.

Temperature range: from -40oC to +80oC.

4. WHERE TO USE

Waterproof membranes, rigid insulating panels, screeds, solid and compact laying surfaces.

ATLANTE 115 – DECKING

5. LOAD TESTS


TEST 1

Dimensions Max load (N)

h=1120mm 9033

The test was run using a 150mm stamp.

Load (N)

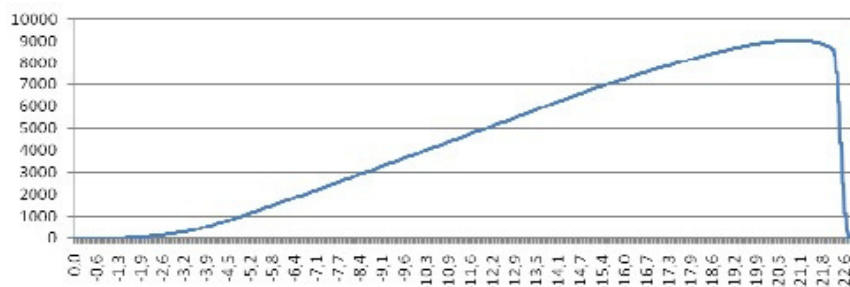

Max load

	9033 N
Max load bending	21mm


TEST 2

Dimensions Max load (N)

h=1100mm 10467

The test was run using a 150mm stamp.

Load (N)

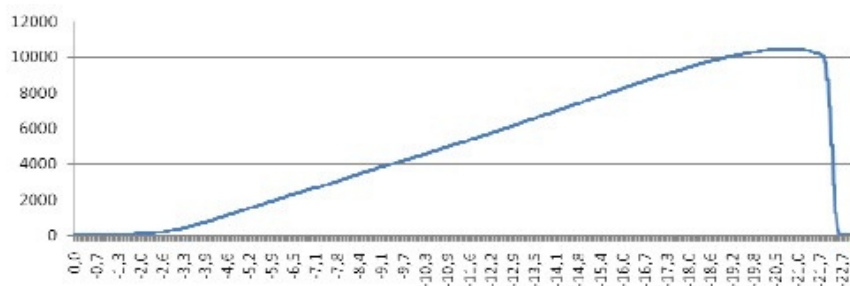

Max load	10467 N
Max load bending	20.7mm

6. SPECIFICATIONS ITEMS

Item	Description	UoM
/	Supply and installation of ATLANTE supports with 115-220mm adjustable height. The base covers an area of 314cm ² . The head has a 120mm diameter and covers an area of 113cm ² . Available versions: - Bag with base, rotating ring and 1-winged head for wooden joists. The base permits a correct water discharge. Made of PP (polypropylene). Used in outdoor areas, terraces, shared flooring.	pc
1277-L	1 wing	pc