

Data Sheet

B3060 – Cimetrics BBMD

- Operates as a stand-alone BBMD
- Enables BACnet communication across IP subnets
- Uses industry's leading BACnet OEM protocol stack (Cimetrics BACstac™)
- Incorporates high-bandwidth design
- Browser-based configuration

PRODUCT INTRODUCTION

A BBMD is a "BACnet/IP Broadcast Management Device" and is used to distribute BACnet broadcast messages throughout a BACnet/IP network consisting of interconnected TCP/IP sub-networks. A BBMD forwards BACnet/IP broadcast messages sent by devices connected to its subnet to peer BBMDs. Upon arrival at a destination BBMD, the message is then re-broadcast on that subnet. BACnet/IP broadcast messages are also sent to registered BACnet/IP Foreign Devices.

The B3060 BBMD functions only as a BBMD. It does not perform BACnet routing, and it is not designed for use with network address translation (NAT).

The B3060 is optimized for high bandwidth usage due to its 32-bit embedded Linux-based OS and our BACstac/32™ protocol stack. This BACnet software is extremely robust and is the leading third party BACnet software used in thousands of devices from prominent industry manufacturers.

FEATURES

The BBMD uses two Ethernet ports—one for the connection to a BACnet/IP network and a dedicated port for configuration. It is easily configured via web pages. The router is housed in a metal case and is powered by a 12 VDC external power supply.

You can save the BBMD's configuration in an offline file and reload at any time as needed. The status page provides a valuable tool for troubleshooting—you can see the network traffic statistics, communication and interface statuses.



BACnet DETAILS

- BACnet/IP (Annex J)
- BBMD with optional Foreign Device (FD) registration support
- BACnet Protocol Revision 14

HARDWARE SPECIFICATIONS

Adapter Input Voltage	100–240 VAC, 50-60 Hz
Operating Temperature	0 to 40 C
Storage temperature	-30 to 50 C
Power consumption	12 VDC, 10W typical
Dimensions	15.8 x 16 x 2.5 cm
Weight	450 g excluding power supply
Ports	10/100/1000 Ethernet
Approvals	FCC Class A, CE

ORDERING INFORMATION

B3060 - Cimetrics BBMD


Wall and DIN rail mounting options available

PRODUCT SUPPORT

One year warranty on hardware

Free product technical support

Specifications are subject to change without notice. BACnet is a registered trademark of ASHRAE. Cimetrics and BACstac are trademarks of Cimetrics Inc. All other brand names are trademarks of their respective organizations. No endorsement of this product by any manufacturer or organization is implied. Copyright © 2018 Cimetrics Inc. All rights reserved.

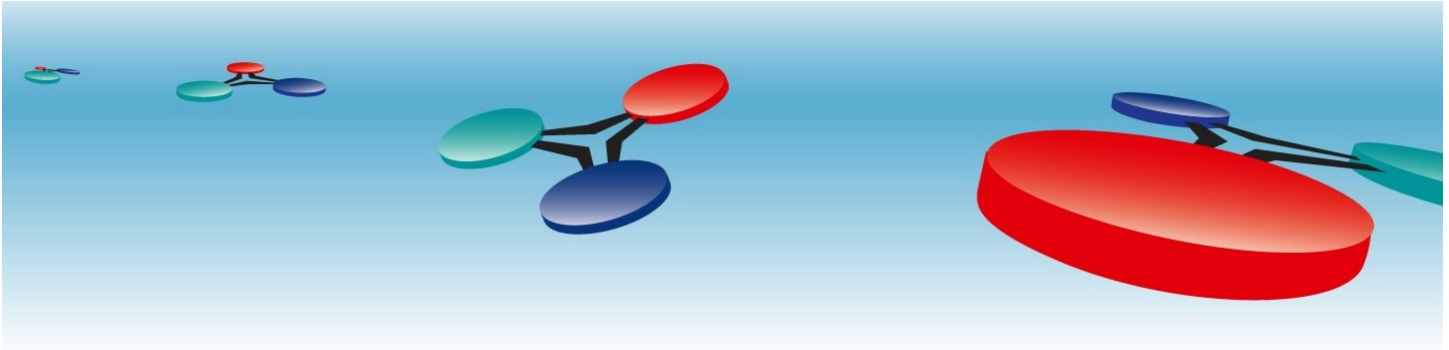


Manage the flow of BACnet/IP broadcast messages within a BACnet/IP network that spans multiple IP subnets:

The BACnet protocol utilizes broadcast messages for certain functions, such as the discovery of BACnet devices. Also, BACnet networks and routes are discovered using broadcasts.

Internet (or TCP/IP) Routers join IP networks together so messages from one network can be sent to another. If your BACnet devices are interconnected via IP routers then BACnet/IP broadcast messages will normally be blocked by the IP router.

To solve this problem BACnet provides a technology called BBMD – BACnet/IP Broadcast Management Device. Cimetrics developed a stand alone BBMD device which serves just this one purpose.

The B3060 BBMD directly forwards a BACnet broadcast message initiated by a BACnet/IP device on its subnet to the other subnets with BACnet/IP devices. Upon arrival at a destination subnet, the message is then broadcast on that subnet by a peer BBMD. The B3060 also works with BBMD devices from other vendors. Any BACnet device on another subnet can register with a BBMD as a Foreign Device. It becomes a member of the BACnet/IP network and will receive forwarded broadcast messages from the BBMD when they are available and can request that messages be broadcast by the BBMD on its behalf.

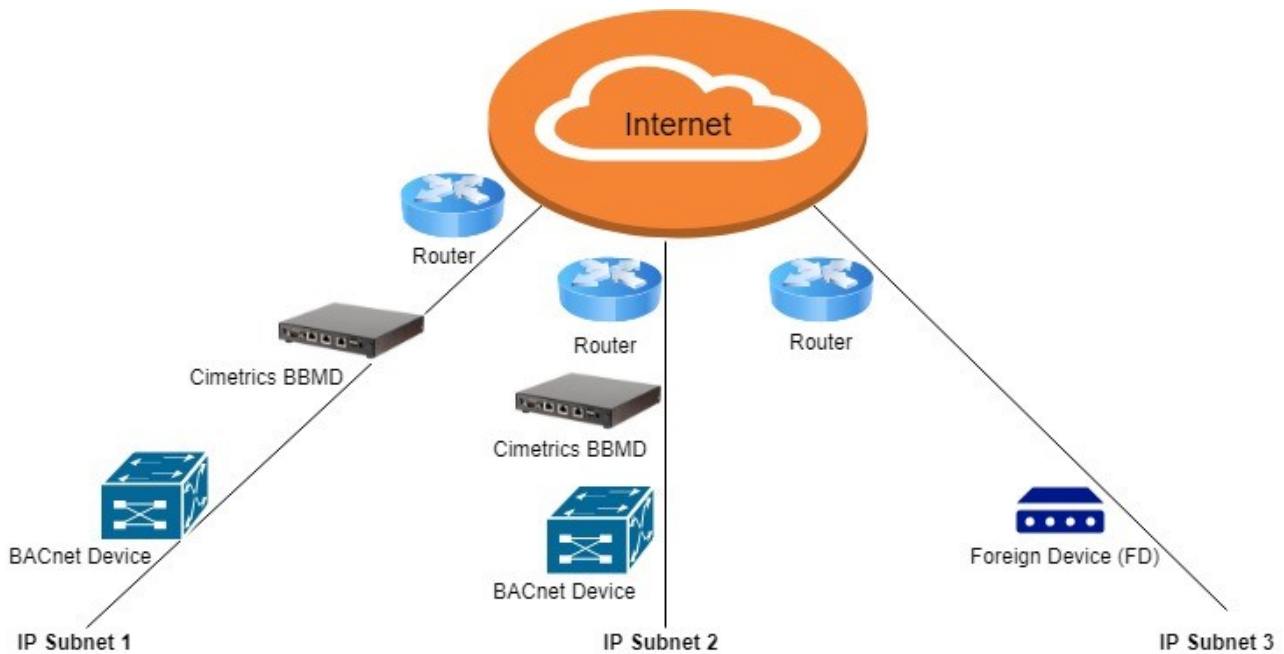

Specifications are subject to change without notice. BACnet is a registered trademark of ASHRAE. Cimetrics and BACstac are trademarks of Cimetrics Inc. All other brand names are trademarks of their respective organizations. No endorsement of this product by any manufacturer or organization is implied. Copyright © 2018 Cimetrics Inc. All rights reserved.

tel: +1-617-350-7550 - fax: 617-350-7552 - info@cimetrics.com - www.cimetrics.com Revised July 2018