

# lillagunga

## CLASSIC

### A SWING SERIES PRODUCT

#### USER MANUAL

ver. 2.0

READ THIS MANUAL CAREFULLY BEFORE  
INSTALLING AND USING YOUR LILLAGUNGA PRODUCT

**NOTE** This manual guides you through the installation and use of your product to a ceiling or wooden beam.

**NOTE** This product is primarily intended for indoor use. Please refer to "outdoor use" for more information.

**NOTE** Marathon Swing Hangers or Lillagunga Tree&Beam Kit are not included in this package unless separately purchased.

**NOTE** This product is intended for home use. The swing shall be used by one (1) person at a time.

**NOTE** This product is NOT intended for children under three (3) years of age.

**NOTE** The maximum permitted weight of a person using the swing is 60 kg.

**WARNING!** We do not take ANY responsibility for possible accidents or damage caused by failure or neglect to follow, or misunderstanding this manual.

## REQUIRED TOOLS

### CEILING INSTALLATION

Marathon Swing Hangers  
(or similar)

Power drill and a drill bit

Pencil, and a measuring tape

Ladders, a tall chair or similar to  
reach the ceiling

### BEAM INSTALLATION

Lillagunga Tree&Beam Kit  
(or similar)


Ladders, a tall chair or similar to  
reach the wooden beam

**WARNING!** Do not place the swing near an open fire or other sources of strong heat, such as electric bar fires, gas fires etc due to the risk of fire.

**WARNING!** Avoid placing the swing over hard floor/ground materials such as asphalt, concrete or glazed tile. A shock-absorbing padding under the swing is recommended.


## INSTALLATION

1. Ensure there is enough space in front and behind, and reserve at least 50 cm on both sides of the swing seat.
2. Use the ladders to reach the ceiling, wooden beam or tree branch. Make sure that the ladders are stable and stand firmly, working vertically may distract your balance.
3. **Wooden beam:** adjust the length of the strap that comes with the Tree&Beam Kit, and connect the carabiner hooks with the swivels.  
**Ceiling:** assemble the swing hangers by following the instructions that comes with the accessory.
4. Ensure that the swing height is adjusted right, and in balance. The swing seat should be at least 45 cm above the ground.
5. Make sure that all parts are firmly in place. Consult an expert in any uncertainty.
6. Always test before use.

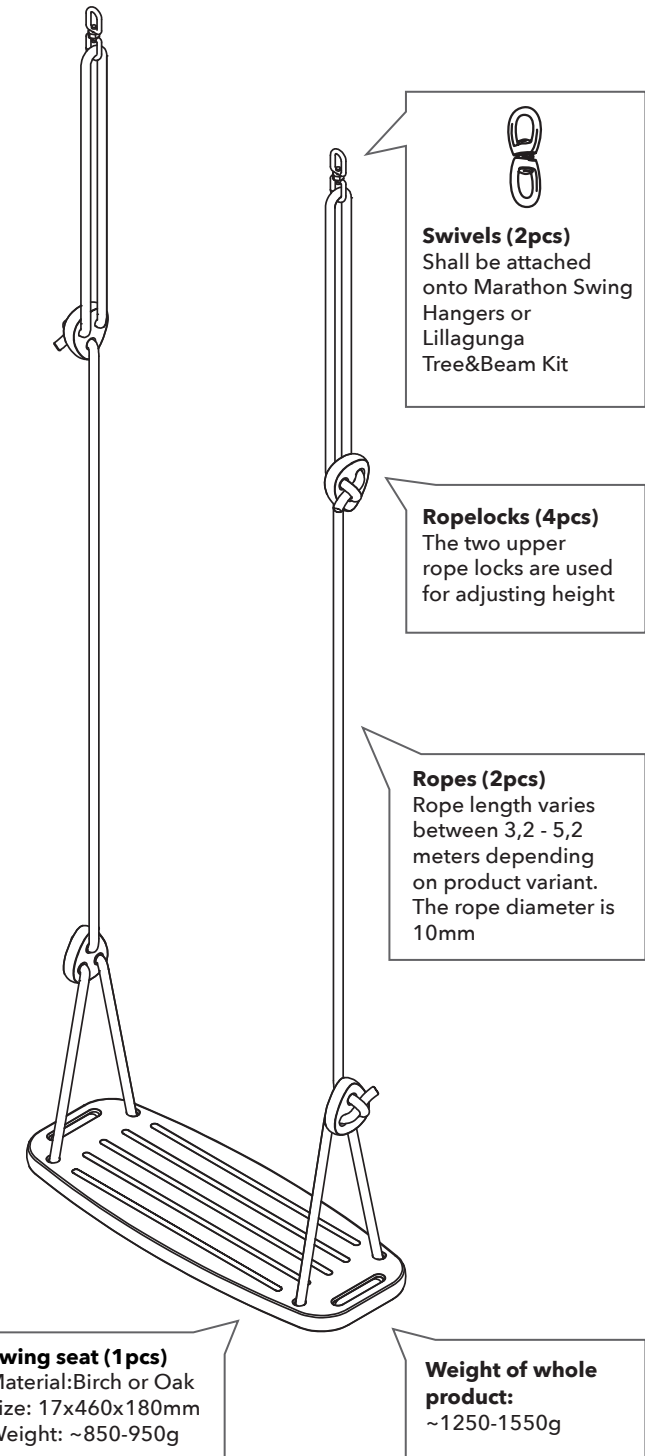

# ADJUSTING HEIGHT

1. Loosen the knot of the UPPER Rope lock by pulling up the rope (fig. 1). Do NOT adjust the lower rope lock.
2. Slide the rope block up and down to adjust (fig. 2)
  - a. To raise the swing: move the rope lock DOWN by sliding the looped rope (B)
  - b. To lower the swing: move the rope lock UP by sliding the looped rope (B)
3. Pass the loose end (A) back under the loop, and secure the knot by pulling the rope (B) from opposite directions (fig. 3).
4. On our web page ([www.lillagunga.com/pages/guides](http://www.lillagunga.com/pages/guides)) you can find a video that shows how to adjust the height of the ropes.

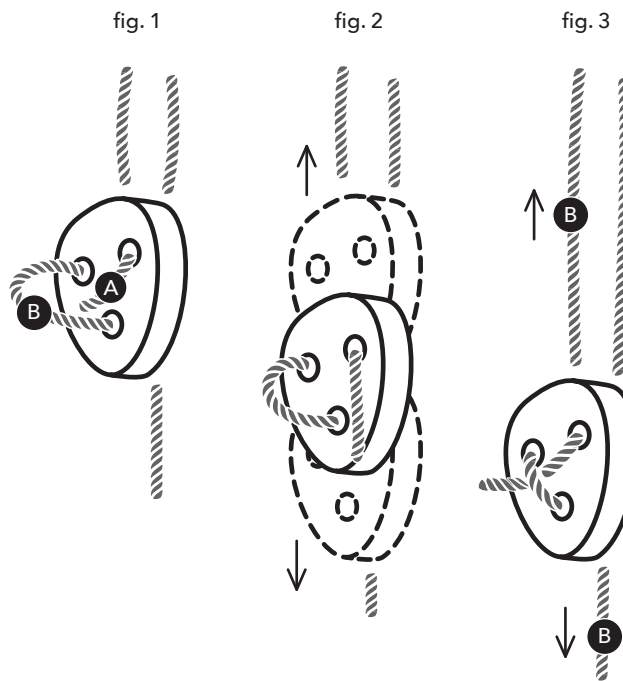

# MAINTENANCE

**The swing shall be inspected once a month.**

- Frequently inspect all parts of the swing. In particular all rope locks, the swivels and metal parts shall be held under inspection as they may become safety risks if damaged or worn out.
- If a fracture (clearly visible to the eye) is identified in a rope lock, remove and replace it.
- Inspect the ropes by sliding your palm gently over the ropes. If the rope is damaged or torn, the braid may loosen up, and thus it becomes a safety risk.
- If a part gets worn out or damaged stop using the product immediately and replace it to a new original Lillagunga part.
- Spare parts are sold on our webpage: [www.lillagunga.com](http://www.lillagunga.com)



## OUTDOOR USE

**This is primarily an indoor product. Oak variants may be used outdoors at own responsibility with the following guidance:**

- The swing must always be placed under shelter, properly protected from rain.
- Sun and moisture will eventually cause changes in materials. These may appear as color changes, fractures or slight change in shape (particularly the wooden parts).
- Outdoor use weakens all parts and thus shortens the lifetime of the swing. As outdoor conditions are very varying our warranty applies only for indoor use.

## SAFETY IN MIND

**Safety shall always be taken very seriously.**

1. Do a routine check of the swing before use. See: "Maintenance"
2. Ensure that the swing height is adjusted right, and that the swing is in symmetric balance.
3. Avoid hard speeds and sideways swinging.
4. Do not swing with a child in your arms.

### NOTE

Proper use and maintenance of the swing according to this manual will extend the lifetime of your product, and prevent possible accidents.

### WARNING!

NEVER leave a child unattended. A parent should always have visibility to the swing, and be within reachable distance from the swing.

## CONTACT

We are happy to assist you in all matters related to Lillagunga. We do our best to respond to all incoming emails within 24 hours at: [info@lillagunga.com](mailto:info@lillagunga.com). Please also refer to our website for additional support such as product returns or claims.

### WARRANTY

INDOOR USE: 3 years on all wooden and metal parts, 2 years on ropes. All related to material or workmanship defects.

This warranty does not apply to defects from normal wear and tear, product misuse, after market product alterations, or failure to follow instructions supplied with the product.

© 2021 Uniq Works  
[www.lillagunga.com](http://www.lillagunga.com)