

GUSHER® GALLEY MK3

SIMPLE FOOT OPERATED SOLUTION FOR PUMPING WATER IN THE GALLEY

Whale manual self priming galley foot pump

- ▶ Self primes and operates dry without damage
- ▶ Easy, smooth hands-free operation. Left and right oriented foot lever versions available
- ▶ Ease of installation - multi-directional inlet and outlet hose connections
- ▶ 3 mounting options
- ▶ Suitable for fresh and saltwater
- ▶ Ideal as a priming pump for use with Whale inline impeller electric pumps (see page 46)

	Gusher Galley MK3	
PART NUMBER	GP0550	GP0551
Lever mounting	Right	Left
Weight	0.7kg (1.5lbs)	
Hose connection	Suitable for Connection to Whale Quick Connect 15mm Plumbing or 13mm (½") Flexible hose	
Materials	Pump Body: Acetal, Nylon. Lever: LM6 Aluminium Alloy Diaphragm: Nitrile, Neoprene, Fasteners: Stainless Steel	
Service kits	AK0553 - Service Kit for Gusher® Galley (suitable for MK3 only) Contains: Diaphragm, Valves and Seals AS0556 - Piston and Operating Kit	

	Performance
PART NUMBER	GP0550 / GP0551
Maximum suction lift	2m (6ft)
Maximum discharge head	3m (10ft)
Maximum flow rate per minute	15 ltrs (4 US Gals)


For further guidance on the selection of the correct pump, please see page 119

WARRANTY 5 YEARS

▶ CE Certified



FRESHWATER

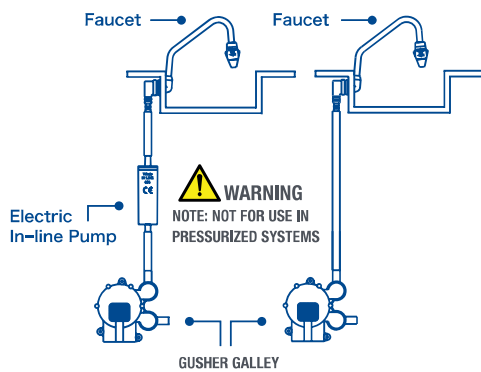

TYPICAL INSTALLATION

