


Pressure Test Kit (digital) - Type SMB-DIGI



Pressure Test Kit (Digital) Type SMB-DIGI

Order Codes



2 Adaptor Version
Adapts to STAUFF Test 20 (M16 x 2)

3 Pressure Ranges

| ソ | 1 1000aro riangoo | |
|---|---------------------------|-------|
| | -1 16 bar / -14.5 232 PSI | B0016 |
| | 0 100 bar / 0 1450 PSI | B0100 |
| | 0 400 bar / 0 5801 PSI | B0400 |
| | 0 600 bar / 0 8702 PSI | B0600 |
| | | |

7/16–20 UNF

⑤ Calibration

| $ \mathbf{C} $ | | | | |
|----------------|---------------------------------|--------|--|--|
| | Without calibration certificate | (none) | | |
| | With calibration certificate | CAL | | |

Product Description

In addition to the individual SPG-DIGI devices, the STAUFF Digital Pressure Gauges are also available as part of a pressure test kit.

The SMB-DIGI pressure test kits are assembled in various versions, in accordance with customer wishes. All pressure test kits are supplied in a handy case with custom-designed foam inserts.

Components


Standard Option SMB-DIGI-20

- Digital Pressure Gauge SPG-DIGI
- Test Hose (2 m / 6.56 ft), M16 x 2, pressure-resistant 600 bar (8702 PSI) SMS-20-2000-B-W3
- Adaptor SDA (G1/4 to M16 x 2) SDA-20-G1/4-W3
- Hose Connector SSV-20-W3
- Test Coupling SMK-20-G1/4-B-C-W3
- Test Coupling SMK-20-M10x1-B-A-W3
- Thread Adaptor SRS-20-G3/8-B-W3
- Thread Adaptor SRS-20-G1/2-B-W3Operating manual (multilingual) on CD

Pressure Ranges

| Version | Pressure Range (bar/PSI) | Maximum Pressure (bar/PSI) | Burst Pressure (bar/PSI) |
|---------|--------------------------|----------------------------|--------------------------|
| B0016 | -1 16 | 40 | 50 |
| DUU 10 | -14.5 232 | 580 | 725 |
| D0100 | 0 100 | 200 | 800 |
| B0100 | 0 1450 | 2900 | 11603 |
| D0400 | 0 400 | 800 | 1700 |
| B0400 | 0 5801 | 11603 | 24656 |
| B0600 | 0 600 | 1200 | 2200 |
| D0000 | 0 8702 | 17404 | 31908 |

Accessories (Connection Adaptors)

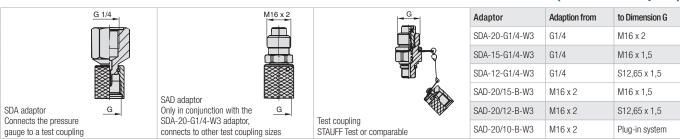

Other adaptors are available.

