
G-5 SWING GATE OPERATOR

RESIDENTIAL AND COMMERCIAL

CLASS I, II, III, & IV VEHICULAR SWING GATE OPERATOR

www.PerformanceGateOpeners.com | (800) 878-7829 | Sales@PerformanceGateOpeners.com

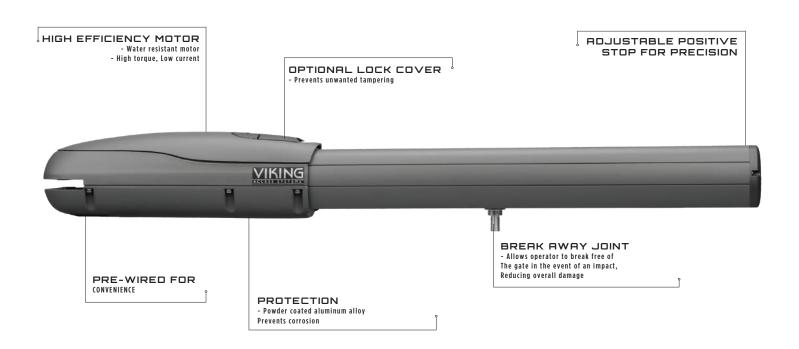

COMPATIBLE WITH VIKING WIRELESS PRODUCTS

• Plug & Play connection for the Viking wireless expansion products.

• Viking Konnect - Wireless Kit provides secure and reliable wireless communication when the application requires two single ECUs.

• Viking Monitor - Remote access to the control board settings, operator diagnostics, controls, gate status and error notifications, all from the convenience of a computer or any compatible hand held device

BATTERY BACKUP INCLUDED

• Standard Battery Backup provides 400 continuous cycles at 100% duty cycle.

• With Viking's "True" Battery Backup System, batteries are not used during normal operations, maximizing battery life.

LIGHTNING PROTECTION

- Advanced lightning strike protection up to 20,000 volts / 10,000 amps

• On-board surge protection monitoring.

PROTECTION

• Powder coating on aluminum alloy chassis provides long Lasting protection against corrosion

MANUAL RELEASE SWITCH


• Electronic disengagement so the gate can be moved freely

LARGE BOX OPTION

• A bigger box option that fits up to (2) 35 amp hour batteries is available

STRENGTH

• Strong and powerful design capable of handling up to 2000 Lbs or 18' long gates



GATE WEIGHT/LENGTH RELATIONSHIP

Operational Voltage	24 VDC 1/2 HP	Operating Speed	15–18 Seconds per 90°
Main Power Source Options	120/240 VAC Single Phase	Operating Temperature	-20°F up to +160°F
Operating Angle	135 ° Max	Max Gate Capacity	2000 Lbs/10' or 800 lbs/18'
Battery Backup	400 Full Contin. Cycles	Max Duty Cycle	100% Contin. Cycle