


## GermAwayUV Sanitation Conveyor System

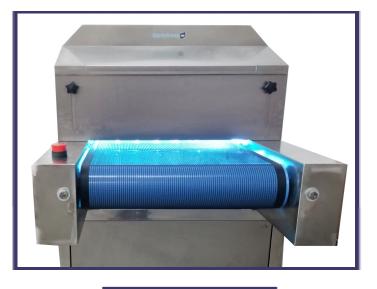

EPA Est No. 94850-FL-1

The ideal solution for disinfecting high quantities of small items rapidly

# TECHNICAL SPECIFICATIONS

#### INFO


CONVEYOR SPEED:	0-16 FEET PER MINUTE
GERMICIDAL OVEN ENTRY/EXIT HEIGHT:	ADJUSTABLE UP TO 6"
UV BULB RATED LIFE:	10,000 HOURS
UV-C POWER:	320 WATTS
CONVEYOR WIDTH:	20"
VOLTAGE:	120V (220V UNITS AVAILABLE AS WELL)
UV BULBS USED	16
UV GERMICIDAL AREA:	40" X 16"

## **KEY FEATURES**

- 253.7nm UV light clinically proven to eliminate pathogens, germs and viruses.
- · Variable belt speed
- Run multiple types of items through conveyor with ease.
- Long bulb life and easy bulb replacement.

## DOSAGE AT VARYING CONVEYOR SPEEDS

Speed	Dosage from Above	Dosage from Below
1	557 mJ/cm2	247 mJ/cm2
2	403 mJ/cm2	196 mJ/cm2
3	312 mJ/cm2	173 mJ/cm2
4	269 mJ/cm2	116 mJ/cm2
5	243 mJ/cm2	127 mJ/cm2
6	204 mJ/cm2	101 mJ/cm2
7	185 mJ/cm2	100 mJ/cm2
8	167 mJ/cm2	78 mJ/cm2
9	155 mJ/cm2	65 mJ/cm2
10	140 mJ/cm2	57 mJ/cm2





This document is copyright@February, 2024 SPDI, Inc. All rights reserved. This document is provided for information purposes only. Contents are subject to change without notice. It is not warranted to be error-free. Nor subject to any other warrenties or conditions including implied warrenties and conditions of merchantability or fitness for a particular purpose.



Phone: (800) 977-7292 Address: 2801 Rosselle St Jacksonville, FL 32205 Web Store: www.cureUV.com

### ADDITIONAL INFORMATION

For more information of any of our products or services please visit us on the Web at:

www.cureuv.com