

SIRIUS safety relay Basic unit Standard series Relay enabling circuits 3 NO contacts plus Relay signaling circuit 1 NC contact Us = 24 V AC/DC Spring-type terminal (push-in)



General technical data	
Product brand name	SIRIUS
Product category	Safety relays
Product designation	safety relays
Design of the product	Relay enabling circuits
Protection class IP of the enclosure	IP20
Protection against electrical shock	finger-safe
Insulation voltage rated value	300 V
Ambient temperature	
• during storage	-40 ... +80 °C
• during operation	-25 ... +60 °C
Air pressure acc. to SN 31205	90 kPa ... 106 kPa
Relative humidity during operation	10 ... 95 %
Installation altitude at height above sea level maximum	2 000 m
Vibration resistance acc. to IEC 60068-2-6	5 ... 500 Hz: 0.75 mm
Shock resistance	10g / 11 ms
Surge voltage resistance rated value	4 000 V
EMC emitted interference	IEC 60947-5-1, IEC 61000

Installation environment regarding EMC	This product is suitable for Class B environments and can also be used in domestic environments.
Overvoltage category	3
Degree of pollution	3
Reference code acc. to DIN EN 81346-2	F
Power loss [W] maximum	2 W
Number of sensor inputs 1-channel or 2-channel	1
Design of the cascading	none
Type of the safety-related wiring of the inputs	single-channel and two-channel
Product feature cross-circuit-proof	Yes
Safety Integrity Level (SIL) • acc. to IEC 61508	3
Performance level (PL) • acc. to EN ISO 13849-1	e
Category acc. to EN ISO 13849-1	4
Safe failure fraction (SFF)	99 %
PFHD with high demand rate acc. to EN 62061	0.0000000017 1/h
PFDavg with low demand rate acc. to IEC 61508	0.000001
T1 value for proof test interval or service life acc. to IEC 61508	20 y
Hardware fault tolerance acc. to IEC 61508	1
Safety device type acc. to IEC 61508-2	Type A
Number of outputs as contact-affected switching element • as NC contact — for signaling function instantaneous contact • as NO contact — safety-related instantaneous contact — safety-related delayed switching	1 3 0
Stop category acc. to DIN EN 60204-1	0

General technical data	
Design of input • cascading input/functional switching • feedback input • Start input	No Yes Yes
Type of electrical connection Plug-in socket	No
Operating frequency maximum	360 1/h
Switching capacity current • of the NO contacts of the relay outputs — at DC-13 — at 24 V — at 115 V	5 A 0.2 A

— at 230 V	0.1 A
— at AC-15	
— at 115 V	5 A
— at 230 V	5 A
• of the NC contacts of the relay outputs	
— at DC-13	
— at 24 V	1 A
— at 115 V	0.2 A
— at 230 V	0.1 A
— at AC-15	
— at 115 V	1.5 A
— at 230 V	1.5 A
Thermal current of the switching element with contacts maximum	5 A
Operating current at 17 V minimum	5 mA
Total current maximum	12 A
Mechanical service life (switching cycles) typical	10 000 000
Design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required	gL/gG: 6A or circuit breaker type A: 3A or circuit breaker type B: 2A or circuit breaker type C: 1A
Design of the fuse link for short circuit protection of the NC contacts of the relay outputs required	Diazed or Neozed fuses, operating class gL/gG: 6 A or MCB type A: 2 A or MCB type B: 2 A or MCB type C: 1 A
Wire length	
• for total of all sensor circuits with Cu 1.5 mm ² and 150 nF/km maximum	2 000 m
Make time with automatic start	
• typical	200 ms
• at DC maximum	320 ms
• at AC maximum	320 ms
Make time with automatic start after power failure	
• typical	200 ms
• maximum	320 ms
Make time with monitored start	
• maximum	20 ms
• typical	15 ms
Backslide delay time after opening of the safety circuits typical	10 ms
Backslide delay time in the event of power failure	
• typical	65 ms
• maximum	75 ms
Recovery time after opening of the safety circuits typical	10 ms
Recovery time after power failure typical	0.09 s
Pulse duration	

- of the sensor input minimum 150 ms
- of the ON pushbutton input minimum 0.015 s

Control circuit/ Control

Type of voltage of the control supply voltage	AC/DC
Control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
Control supply voltage	
• at DC	
— rated value	24 V
• at AC	
— at 50 Hz	
— rated value	24 V
— at 60 Hz	
— rated value	24 V
Operating range factor control supply voltage rated value of magnet coil	
• at AC	
— at 50 Hz	0.85 ... 1.1
— at 60 Hz	0.85 ... 1.1
• at DC	0.85 ... 1.2

Installation/ mounting/ dimensions

Mounting position	any
Required spacing for grounded parts at the side	5 mm
Mounting type	screw and snap-on mounting
Width	22.5 mm
Height	100 mm
Depth	121.6 mm

Connections/ Terminals

Type of electrical connection	Push-in terminal
Type of connectable conductor cross-sections	
• solid	1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 1.5 mm ²)
• finely stranded	
— with core end processing	1x (0.5 ... 1.0 mm ²), 2x (0.5 ... 1.0 mm ²)
— without core end processing	1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 1.5 mm ²)
Type of connectable conductor cross-sections at AWG conductors	
• solid	1x (20 ... 16), 2x (20 ... 16)
• stranded	1x (20 ... 16), 2x (20 ... 16)

Product Function

Product function parameterizable	Sensor floating / sensor non-floating, monitored start / autostart
---	--

Suitability for operation Device connector 3ZY12	No
Suitability for interaction press control	No
Suitability for use	
• safety switch	Yes
• Monitoring of floating sensors	Yes
• Monitoring of non-floating sensors	Yes
• magnetically operated switch monitoring	Yes
• safety-related circuits	Yes

Certificates/ approvals

General Product Approval	EMC	Functional Safety/Safety of Machinery
 CCC  CSA  UL  EAC  RCM		Type Examination Certificate

Declaration of Conformity	Test Certificates	Shipping Approval
 EG-Konf. Miscellaneous	Type Test Certificates/Test Report	 LRS  RINA  RMRS

other	Railway
Confirmation	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/ic10

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SK1111-2AB30>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SK1111-2AB30>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3SK1111-2AB30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SK1111-2AB30&lang=en

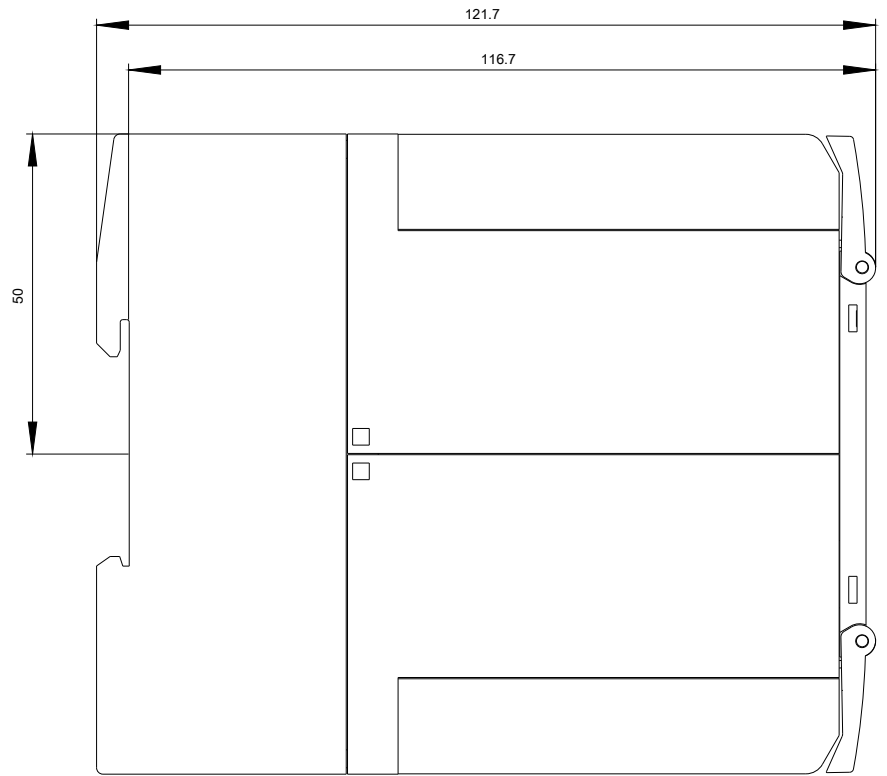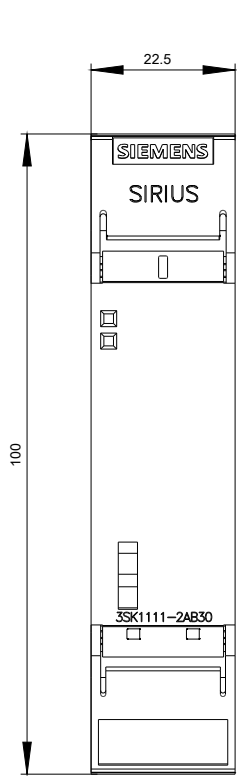

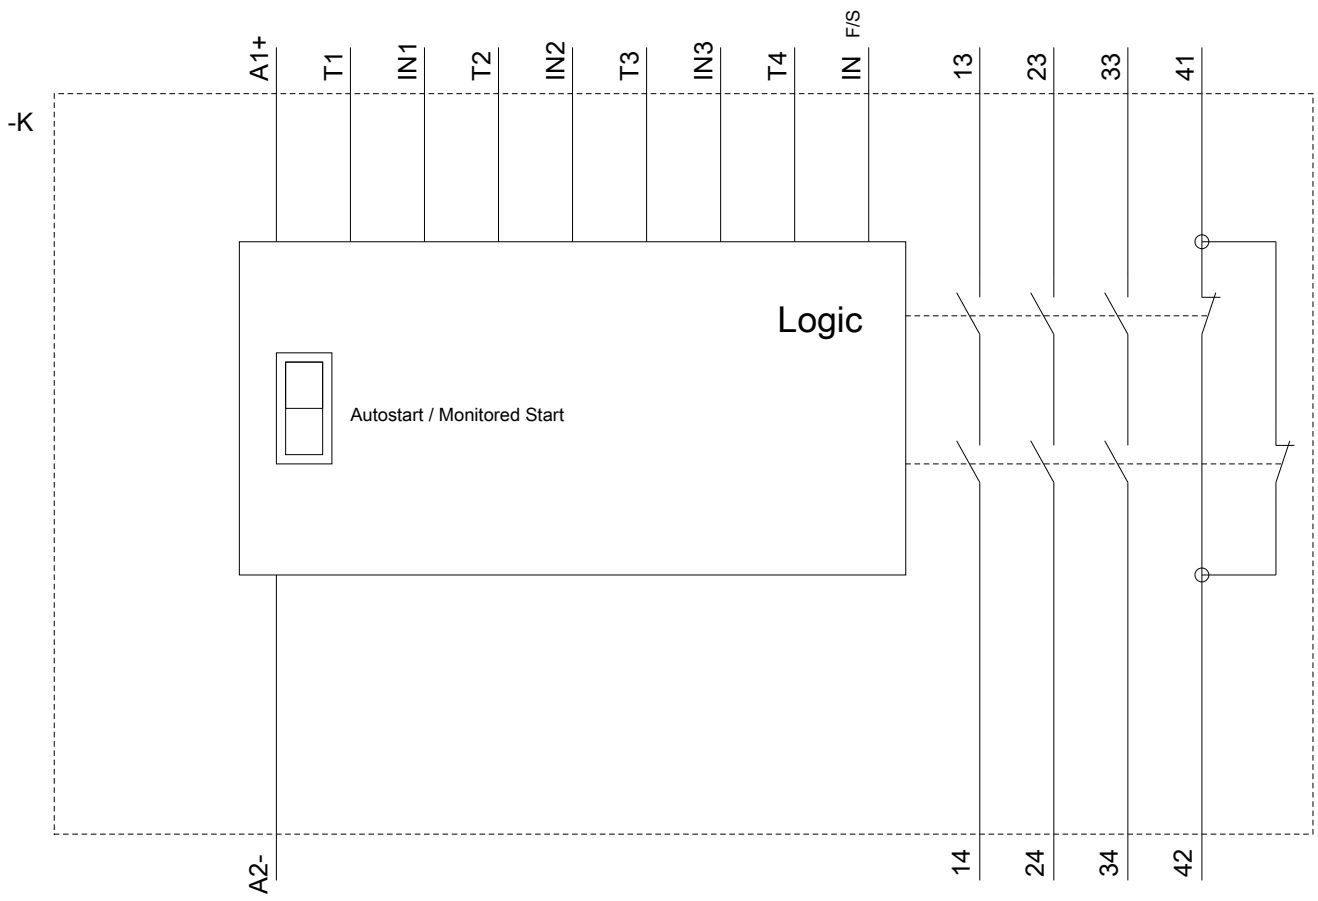

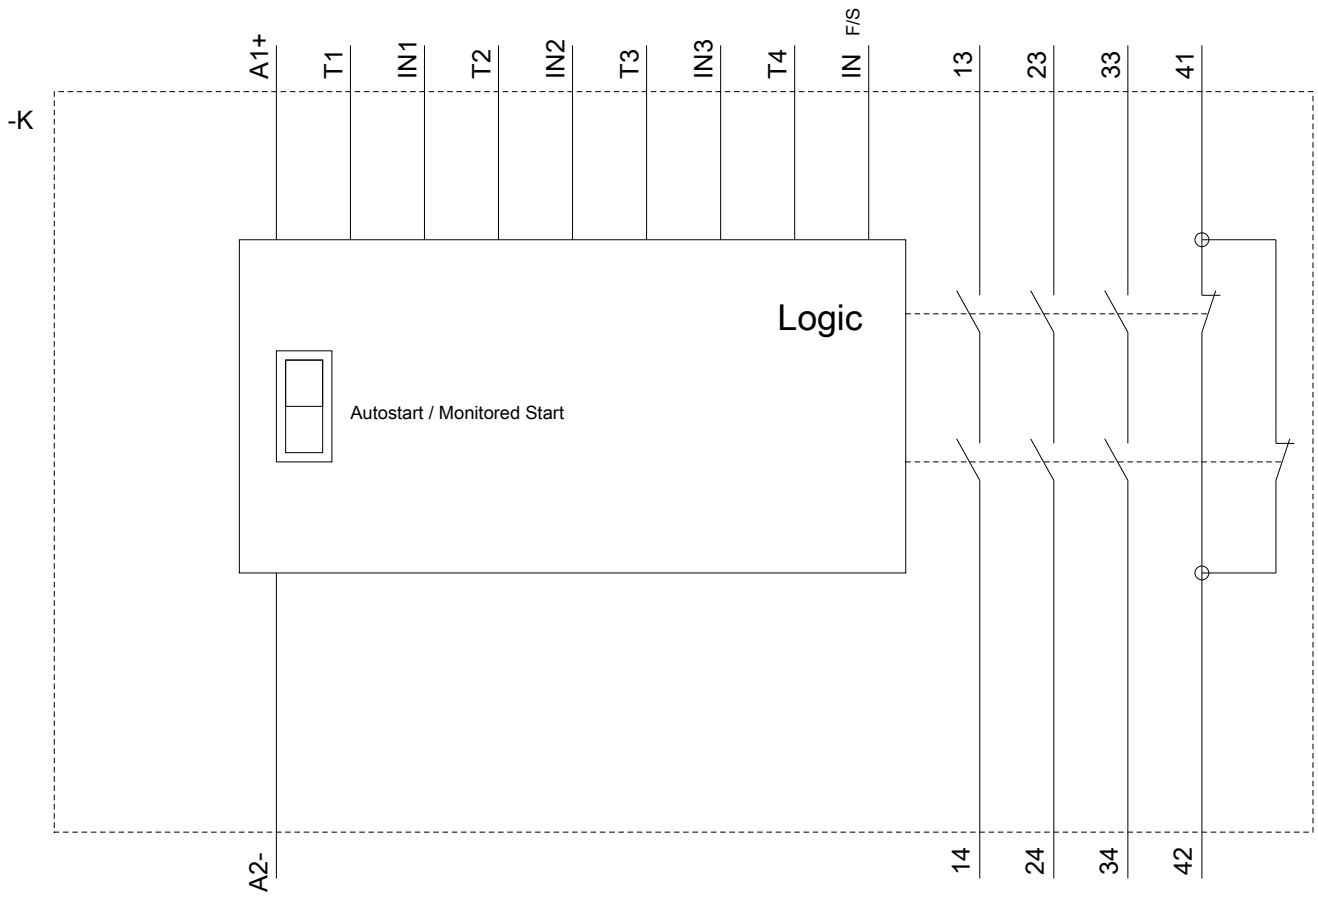

last modified:

01/18/2020