

Indicator lights, 22 mm, round, plastic, amber, lens, smooth, with holder, LED module with integrated LED 110 V AC, screw terminal



| | |
|--|--|
| Product brand name | SIRIUS ACT |
| Product designation | Indicator lights |
| Design of the product | Complete unit |
| Product type designation | 3SU1 |
| Product line | Plastic, black, 22 mm |
| Manufacturer's article number | |
| <ul style="list-style-type: none"> • of supplied LED module • of the supplied holder • of supplied repeater | 3SU1401-1BC00-1AA0 3SU1500-0AA10-0AA0 3SU1001-6AA00-0AA0 |

Enclosure

| | |
|--------------------------|---|
| Number of command points | 1 |
|--------------------------|---|

Actuator

| | |
|--|----------|
| Product extension optional Light source | Yes |
| Color | |
| <ul style="list-style-type: none"> • of the actuating element | amber |
| Material of the actuating element | plastic |
| Shape of the actuating element | round |
| Outer diameter of the actuating element | 29.45 mm |

| Front ring | |
|--|------------------------------------|
| Product component front ring | No |
| Holder | |
| Material of the holder | Plastic |
| Display | |
| Number of LED modules | 1 |
| General technical data | |
| Product component | |
| • Light source | Yes |
| Insulation voltage | |
| • rated value | 320 V |
| Degree of pollution | 3 |
| Surge voltage resistance rated value | 4 kV |
| Protection class IP | IP66, IP67, IP69(IP69K) |
| • of the terminal | IP20 |
| Degree of protection NEMA rating | 1, 2, 3, 3R, 4, 4X, 12, 13 |
| Shock resistance | |
| • acc. to IEC 60068-2-27 | Sinusoidal half-wave 50 g / 11 ms |
| • for railway applications acc. to DIN EN 61373 | Category 1, Class B |
| Vibration resistance | |
| • acc. to IEC 60068-2-6 | 10 ... 500 Hz: 5g |
| • for railway applications acc. to DIN EN 61373 | Category 1, Class B |
| Reference code acc. to DIN EN 81346-2 | P |
| Reference code acc. to DIN EN 61346-2 | P |
| Supply voltage | |
| Type of voltage of the supply voltage | |
| • of the light source | AC |
| Supply voltage of the light source at AC | |
| • at 50 Hz rated value | 110 V |
| • at 60 Hz rated value | 110 V |
| Relative negative tolerance of the supply voltage | 20 % |
| Relative positive tolerance of the supply voltage | 20 % |
| Control circuit/ Control | |
| Inrush current maximum | 3 A |
| Connections/ Terminals | |
| Type of electrical connection | |
| • of modules and accessories | Screw-type terminal |
| Type of connectable conductor cross-sections | |
| • solid with core end processing | 2x (0.5 ... 0.75 mm ²) |
| • solid without core end processing | 2x (1.0 ... 1.5 mm ²) |

| | |
|---|-----------------------------------|
| <ul style="list-style-type: none"> finely stranded with core end processing | 2x (0.5 ... 1.5 mm ²) |
| <ul style="list-style-type: none"> finely stranded without core end processing | 2x (1,0 ... 1,5 mm ²) |
| <ul style="list-style-type: none"> at AWG conductors | 2x (18 ... 14) |
| Tightening torque of the screws in the bracket | 1 ... 1.2 N·m |
| Tightening torque | |
| <ul style="list-style-type: none"> with screw-type terminals | 0.8 ... 0.9 N·m |

| Lamp | |
|----------------------------------|-------------------|
| Type of light source | LED |
| Color of the light source | amber |
| Light intensity | 900 ... 1 400 mcd |

| Ambient conditions | |
|--|---|
| Ambient temperature | |
| <ul style="list-style-type: none"> during operation | -25 ... +70 °C |
| <ul style="list-style-type: none"> during storage | -40 ... +80 °C |
| Environmental category during operation acc. to IEC 60721 | 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95 %, no condensation in operation permitted for all devices behind front panel) |

| Installation/ mounting/ dimensions | |
|--|----------------------|
| Mounting type | front panel mounting |
| <ul style="list-style-type: none"> of modules and accessories | Front plate mounting |
| Height | 40 mm |
| Width | 30 mm |
| Shape of the installation opening | round |
| Mounting diameter | 22.3 mm |
| Positive tolerance of installation diameter | 0.4 mm |
| Mounting height | 11.8 mm |
| Installation width | 29.5 mm |
| Installation depth | 49.7 mm |

Certificates/ approvals

| | |
|---------------------------------|----------------------------------|
| General Product Approval | Declaration of Conformity |
|---------------------------------|----------------------------------|



CCC



CSA



UL



EG-Konf.

[Miscellaneous](#)

| | |
|--------------------------|--------------------------|
| Test Certificates | Marine / Shipping |
|--------------------------|--------------------------|

[Type Test Certificates/Test Report](#)



ABS



LRS



PRS



RINA



RMRS

| | |
|--------------------------|--------------|
| Marine / Shipping | other |
|--------------------------|--------------|



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1103-6AA00-1AA0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1103-6AA00-1AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3SU1103-6AA00-1AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1103-6AA00-1AA0&lang=en



110 V AC
-P

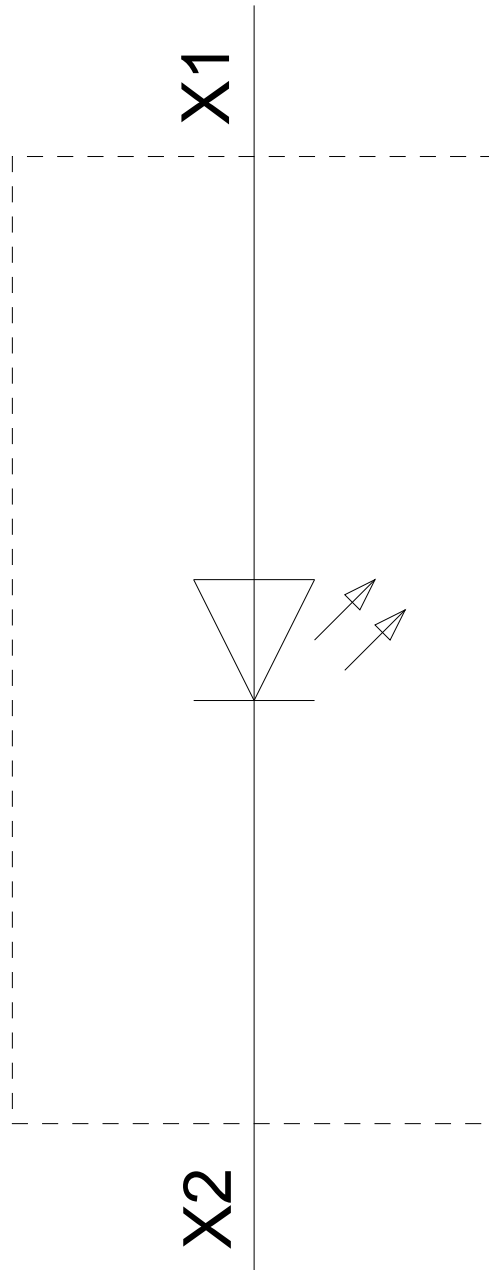

last modified:

03/06/2020