

LED module with integrated LED 230 V AC, green, spring-type terminal, for floor mounting



| | |
|--------------------------|------------|
| Product brand name | SIRIUS ACT |
| Product designation | LED module |
| Product type designation | 3SU1 |

General technical data

| | |
|------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| Product component | |
| <ul style="list-style-type: none"> • diode • lamp transformer • Light source • series resistor | <p>Yes</p> <p>No</p> <p>Yes</p> <p>No</p> |
| Insulation voltage | |
| <ul style="list-style-type: none"> • rated value | 320 V |
| Degree of pollution | 3 |
| Type of voltage | |
| <ul style="list-style-type: none"> • of the operating voltage • for actuation | <p>AC</p> <p>AC</p> |
| Surge voltage resistance rated value | 4 kV |
| Consumed current | |
| <ul style="list-style-type: none"> • maximum | 20 mA |
| Protection class IP | |

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| <ul style="list-style-type: none"> • of the enclosure • of the terminal | IP40 IP20 |
| Shock resistance | |
| <ul style="list-style-type: none"> • acc. to IEC 60068-2-27 • for railway applications acc. to DIN EN 61373 | Sinusoidal half-wave 50 g / 11 ms Category 1, Class B |
| Vibration resistance | |
| <ul style="list-style-type: none"> • acc. to IEC 60068-2-6 • for railway applications acc. to DIN EN 61373 | 10 ... 500 Hz: 5g Category 1, Class B |
| Operating period typical | 100 000 h |
| Reference code acc. to DIN EN 81346-2 | P |
| Reference code acc. to DIN EN 61346-2 | P |
| Operating voltage 1 | |
| <ul style="list-style-type: none"> • at AC <ul style="list-style-type: none"> — at 50 Hz rated value — at 60 Hz rated value | 230 V 230 V |
| Relative positive tolerance of the operating voltage | 20 % |
| Relative negative tolerance of the operating voltage | 20 % |

Control circuit/ Control

| | |
|-------------------------------|-----|
| Inrush current maximum | 3 A |
|-------------------------------|-----|

Connections/ Terminals

| | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Type of electrical connection | spring-loaded terminals |
| Type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • solid without core end processing • finely stranded with core end processing • finely stranded without core end processing • at AWG conductors | 2x (0.25 ... 1.5 mm ²) 2x (0.25 ... 0.75 mm ²) 2x (0.25 ... 1.5 mm ²) 2x (24 ... 16) |

Lamp

| | |
|---------------------------------------------------------------------------|-------------------|
| Type of light source | LED |
| Color of the light source | green |
| Light intensity | 900 ... 1 400 mcd |
| Certificate of suitability | |
| <ul style="list-style-type: none"> • ATEX • IECEx | No No |

Ambient conditions

| | |
|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| Ambient temperature | |
| <ul style="list-style-type: none"> • during operation • during storage | -25 ... +70 °C -40 ... +80 °C |
| Environmental category during operation acc. to IEC 60721 | 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95 %, no condensation in operation permitted) |

Installation/ mounting/ dimensions

| | |
|------------------------------------------------------|----------------|
| Mounting type • of modules and accessories | Floor mounting |
| Height | 36 mm |
| Width | 9.8 mm |
| Depth | 29.4 mm |

Certificates/ approvals

| | | |
|---------------------------------|------------|----------------------------------|
| General Product Approval | EMC | Declaration of Conformity |
|---------------------------------|------------|----------------------------------|



| | | |
|----------------------------------|--------------------------|--------------------------|
| Declaration of Conformity | Test Certificates | Marine / Shipping |
|----------------------------------|--------------------------|--------------------------|

[Miscellaneous](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



| | |
|--------------------------|--------------|
| Marine / Shipping | other |
|--------------------------|--------------|



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1401-2BF40-3AA0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1401-2BF40-3AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3SU1401-2BF40-3AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1401-2BF40-3AA0&lang=en



230 V AC
-P

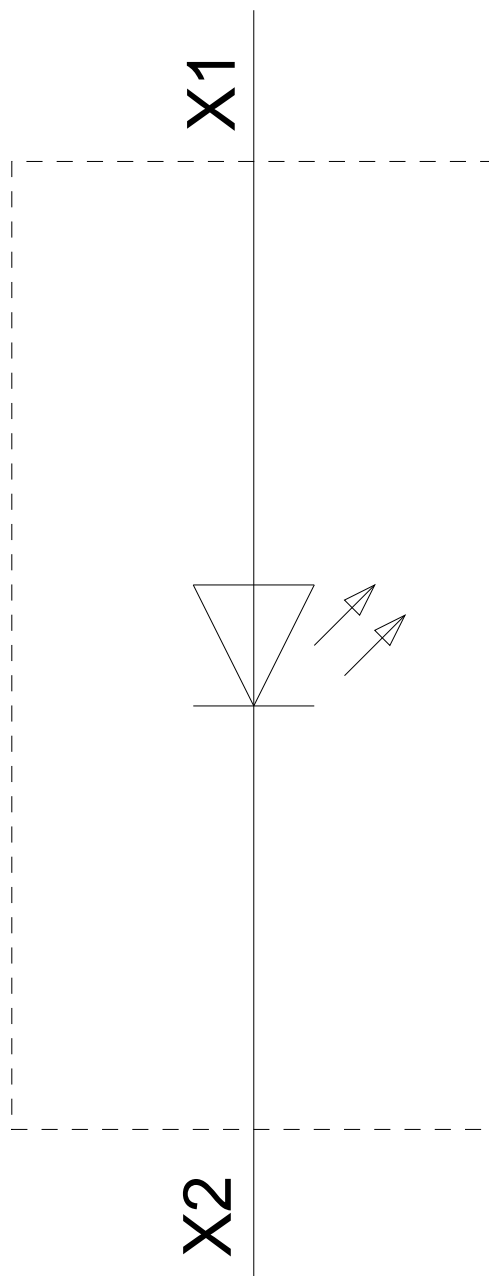

last modified:

03/10/2020