



WWW.TWOBROS.COM
401 S. GRAND AVE., SANTA ANA, CA 92705 - (800) 211-2767

KAWASAKI Z125
Full System Part # 005-4480105-T

TARMAC.



1	Muffler Canister	8" Tarmac Muffler
1	Header	005-44801H
1	T1-X Power Tip (installed)	005-T1-X
2	8x25mm Flange Bolt	005-FB825
2	8mm Flange Nut	005-FN8
1	Support Bracket	005-448-B
1	6mm Socket Head Cap Screw	005-SH640
1	6mm Lock Washer	005-WL6
1	6mm Lock Nut	005-NN6
1	O2 Sensor Kit	005-92-22KIT
1	TBR Sticker Kit	015-10212
1	Spring Puller	005-SP
1	Anti-Seize	031-P09175
2	45mm Swivel Hook Spring	005-S45

IMPORTANT - PLEASE READ CAREFULLY


We recommend that this performance part be installed by a qualified motorcycle technician. If you have any doubts as to your ability to install this performance part, please consult with your local motorcycle dealer. Read all instructions first before starting installation. Make sure the motorcycle and exhaust system are completely cool before starting the installation. Also, make sure the bike is secure on a centerstand or ideally a service lift during installation. Be sure to save all stock components for possible use later.

WARRANTY

Two Brothers Racing products are intended for closed course competition purposes only, and therefore are sold "as is" without warranty. Two Brothers Racing specifically disclaims any warranties of merchantability or fitness for a particular purpose and disclaims all responsibility for consequential and incidental damages or any other losses arising from the use of these products or parts.

INSTALLATION INSTRUCTIONS

1. Make sure the bike is completely cool before starting the installation. Make sure the bike is secure on the side stand or ideally a service lift.
2. Remove the Lower Cowling to expose header.

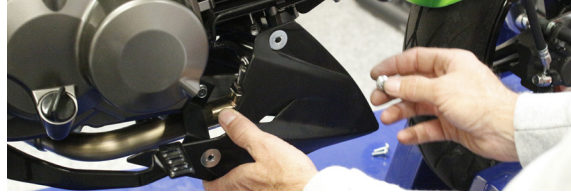


3. Remove O2 sensor from OEM header.



4. Remove OEM header mounting hardware.



5. Remove header assembly.

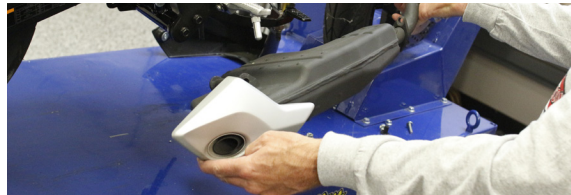

6. Remove right side passenger foot peg pin.



7. Install supplied 6mm bolt, lock washer and nut to secure muffler bracket and foot peg in place of OEM pin.



8. Install TBR header assembly using OEM header flange bolts and supplied 8mm flange bolt to center mount.




9. Attach TBR muffler to header with a small amount of supplied anti seize and springs provided.



10. Attach muffler mount to previously installed bracket using the supplied flange bolt and nut provided.



11. Install O2 sensor using the supplied reducer if needed.

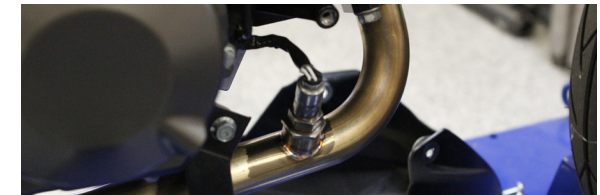



WWW.TWOBROS.COM
401 S. GRAND AVE., SANTA ANA, CA 92705 - (800) 211-2767

KAWASAKI Z125
Full System Part # 005-4480105-T

TARMAC.



1	Muffler Canister	8" Tarmac Muffler
1	Header	005-44801H
1	T1-X Power Tip (installed)	005-T1-X
2	8x25mm Flange Bolt	005-FB825
2	8mm Flange Nut	005-FN8
1	Support Bracket	005-448-B
1	6mm Socket Head Cap Screw	005-SH640
1	6mm Lock Washer	005-WL6
1	6mm Lock Nut	005-NN6
1	O2 Sensor Kit	005-92-22KIT
1	TBR Sticker Kit	015-10212
1	Spring Puller	005-SP
1	Anti-Seize	031-P09175
2	45mm Swivel Hook Spring	005-S45

INSTALLATION INSTRUCTIONS

12. Re-install lower cowlings.



13. Double check your work to be sure everything is secure.
14. Before you run the bike, clean off all fingerprints and dirt, as any oily residue will etch the metal and become somewhat permanent when the system gets hot. Run the bike and enjoy. It is normal for some white smoke to appear the first time you start the bike. This is packing/manufacturing oil from inside the pipe burning off. Check for gaps or leaks. If you find a leak, a little high temperature silicon sealant should fix it. After 50 to 100 miles, recheck all fasteners for tightness.

CARE & CLEANING

Care & Cleaning

Keep system free of dirt and moisture. Store in a cool, dry place. Make sure vehicle is completely cool before maintenance.

Stainless Header System: Polished stainless steel pipes will turn a light golden hue after a few heat cycles, this is a normal characteristic of high quality stainless steel. Clean using a mild water based spray cleaner. Always apply cleaner or polish with a soft, clean cloth.

Titanium Header System: Polished titanium pipes will experience color shift ranging from deep blue/purple through amber after a few heat cycles. This is a normal characteristic of high quality titanium. Clean using a mild water based spray cleaner. Always apply cleaner or polish with a soft, clean cloth.

Polished Aluminum Canisters: Use an aluminum or mag wheel polish to restore the bright finish to factory spec.

Brushed Aluminum Canisters: Clean using a mild water based spray cleaner. Always apply cleaner or polish with a soft, clean cloth.

Carbon Fiber Canisters: Clean using a mild water based spray cleaner. Always apply cleaner or polish with a soft, clean cloth. Always make sure the fiberglass packing inside is in good condition and not burned out, as exhaust heat inside an empty canister will deteriorate the carbon fiber sleeve. TBR sells repack kits (Road - #005-10038, Offroad - #005-10038MX) that include everything you need to easily do it yourself.

Titanium Mufflers: For cleaning use a mild water based spray cleaner. Always apply cleaner or polish with a soft, clean cloth. Always make sure the fiberglass packing inside is in good condition and not burned out, as exhaust heat inside an empty canister will deteriorate the carbon fiber sleeve. TBR sells repack kits (Road - #005-10038, Offroad - #005-10038MX) that include everything you need to easily do it yourself.

Repack all road canisters at the first signs of packing material deterioration. Part #005-10038

Repack all offroad canisters after every 10 hours of use. Part #005-10038MX

NEVER dyno test your bike with carbon fiber or titanium canisters installed - the intense heat and lack of cooling air can quickly burn through the canister material. Two Brothers Racing does not provide a warranty for burned canisters.