



2004-2009 Yamaha FZ-6

Installation Instructions



PLEASE READ ALL DIRECTIONS BEFORE STARTING INSTALLATION

JUICEBOX^{PRO}
Premium Fuel Controller

PARTS LIST

- 1 Juice Box Pro™
- 1 USB Cable
- 1 TopTune CD-ROM
- 1 Installation Guide
- 2 Velcro strip
- 1 Alcohol swab

THE IGNITION MUST BE TURNED OFF BEFORE INSTALLATION!


DOWNLOAD THE TOPTUNE SOFTWARE
AND LATEST MAPS FROM OUR
WEBSITE:

www.twobros.com

401 S. Grand Ave. Santa Ana, CA 92705
(800) 211-2767 www.twobros.com

JUICEBOX PRO[®]

Premium Fuel Controller

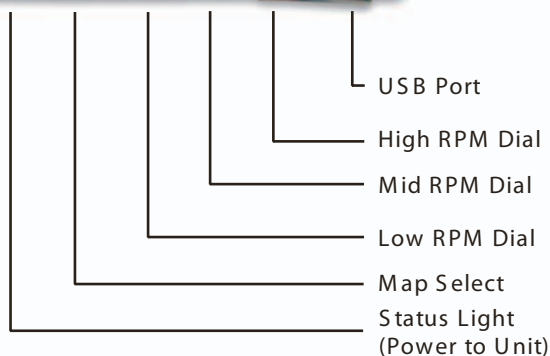

Selecting the Map Position

The Juice Box Pro comes loaded with up to ten maps. Using a #1 Phillips screwdriver, turn the map select dial to toggle between the loaded maps. Refer to the map position table below for the maps included in your Juice Box Pro.

Using the RPM Range Dials

The Low, Mid, and High RPM Dials refer to the RPM range, in thirds, of your vehicle. Each dial allows +/- 10% fuel adjustment on top of what fuel changes are done in the map. With the dial facing straight up, there is no additional fuel change.

For example, if your vehicle revs to 15,000 RPM:

- the low RPM dial will adjust 0-5000 RPM
- the mid RPM dial will adjust 5001-10000 RPM
- the high RPM dial will adjust 10001-15000 RPM

Using TopTune

Take your tuning to the next level with the TopTune software.

Installing the TopTune Software

- 1 Insert the CD provided into your computer's cd-rom drive. The launch program will run automatically.
If auto-run is disabled, double-click the My Computer icon then double-click the CD drive icon. Double-click TBR TopTune.exe to manually start the CD.
- 2 Click Install Software and follow the on-screen instructions to install the Top Tune software. The TopTune software and maps will be stored in C:\Program Files\TBR TopTune.
- 3 Click Map Database. All maps will automatically be installed to the C:\Program Files\TBR TopTune\maps folder.



Loading Additional Maps

- 1 Connect the USB cable from the computer to the Juice Box Pro. Verify the cable is fully seated in the Juice Box Pro.
- 2 Run the TopTune software by double-clicking the program icon installed on your desktop or on your start menu.
- 3 Click Open Map File and select a map file.
- 4 Click Send Map. You can send the map to any of the ten map positions.

Altering Maps Using TopTune


The values in the map represent a percentage of fuel change over stock. A value of 10 in the map indicates at that throttle position and RPM range the vehicle will be 10% richer than stock. If the value is -10, then it would be 10% leaner than stock. You have the ability to fine tune your fuel curve by altering these values. The TopTune software allows a value of +250 to -100 in each cell.

Position 0	Zero map	
Position 1	Stock exhaust Stock air filter	2004-2008 Yamaha FZ6
Position 2	Two Brothers Slip-ons Stock air filter	2004-2008 Yamaha FZ6
Position 3	Stock exhaust Stock air filter	2009 Yamaha FZ6
Position 4	Two Brothers Slip-ons Stock air filter	2009 Yamaha FZ6

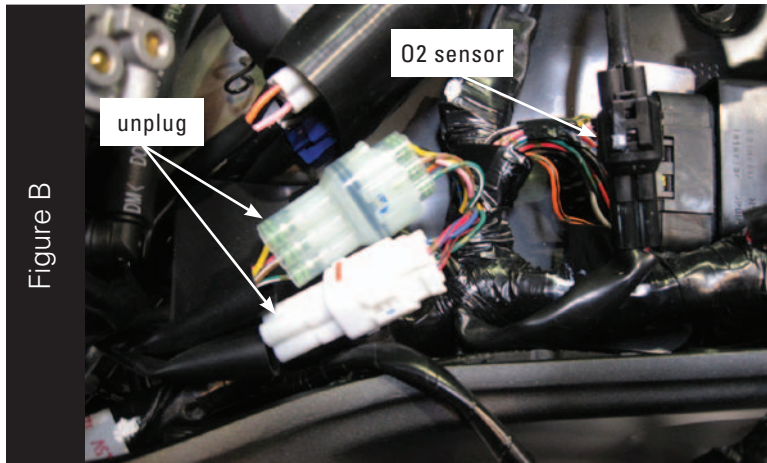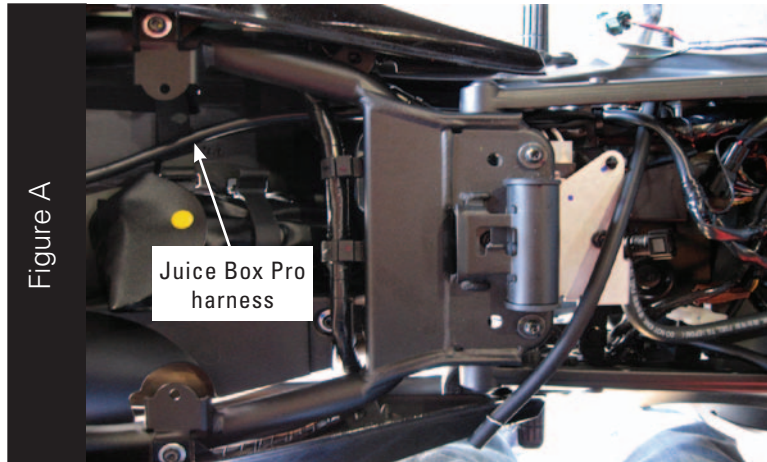

1. Remove the main seat and the passenger seat.
2. Prop the front of the fuel tank up.
Figure A shows the fuel tank removed which is not necessary.
3. Lay the Juice Box Pro in the tail section and route the harness down the left side of the bike as shown in Figure A.
4. Unplug the wiring harness from the throttle bodies as shown in Figure B.
One connector is a white 4-pin connector and the other is a clear 6-pin connector.
5. Unplug the stock O2 sensor and attach the connectors from the Juice Box Pro to the stock connector and harness.
Note: Skip step 5 for the 2004-2006 models as they do not have an O2 sensor.
6. Attach the connectors from the Juice Box Pro to the stock wiring harness as shown in Figure C.

Figure D

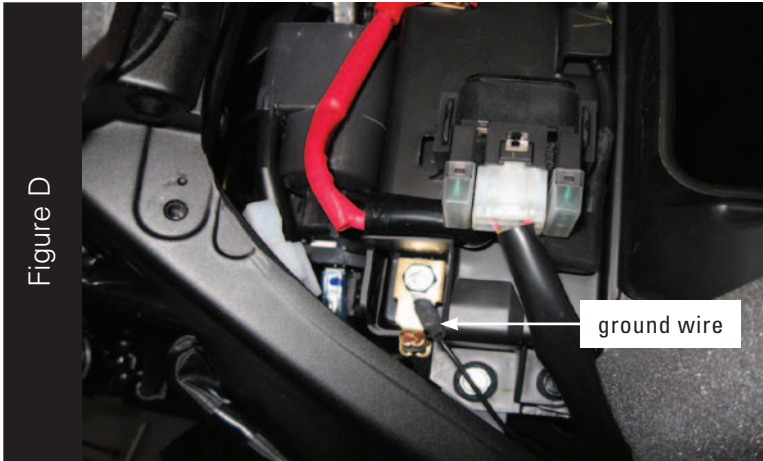

- Attach the ground wire from the Juice Box Pro to the negative side of the battery as shown in Figure D.

Figure E



- Using the supplied velcro, secure the Juice Box Pro in the tail section as shown in Figure E.
Make sure to clean both surfaces with the alcohol swab before attaching.
- Reinstall the fuel tank.
- Reinstall the passenger seat and the main seat.

Figure F

		MAP 1 - CYLINDER 1,2									
		THROTTLE (%)									
		0	2	5	10	15	20	40	60	80	100
500	0	0	0	0	0	0	0	0	0	0	0
750	0	0	0	0	0	0	0	0	0	0	0
1000	0	0	0	0	0	0	0	0	0	0	0
1250	0	0	0	0	0	0	0	0	0	0	0
1500	0	0	0	0	0	0	0	0	0	0	0
1750	0	0	0	0	0	0	0	0	0	0	0
2000	0	0	0	0	0	0	0	0	0	0	0
2250	0	0	0	0	0	0	0	6	3	-2	-3
2500	0	0	0	0	0	0	0	4	-1	-6	0
2750	0	0	0	0	0	0	0	4	-4	-14	1
3000	0	0	0	0	0	0	0	0	-2	-15	1
3250	0	0	0	0	0	0	0	6	4	-2	7
3500	0	0	0	0	0	0	0	8	5	4	11
3750	0	0	0	0	0	0	0	3	-1	-4	0
4000	0	0	0	0	0	0	0	-1	-9	-5	-3
4250	0	0	0	0	0	0	0	2	-2	1	-2
4500	0	0	0	0	0	0	0	8	2	2	-5
4750	0	0	0	0	0	0	0	9	4	4	-1
5000	0	0	0	0	0	0	0	13	7	7	3
5250	0	0	0	0	0	0	0	15	10	5	3
5500	0	0	0	0	0	0	0	15	8	6	2
5750	0	0	0	0	0	0	0	17	8	5	3
6000	0	0	0	0	0	0	0	13	9	7	3

The Juice Box Pro for this model controls the stock closed loop area. This area is represented by the highlighted cells shown in Figure I. The Juice Box Pro is designed to achieve a target AFR of 13.6:1. To use this Juice Box Pro you must retain your stock O2 sensor.

It is not recommended to alter the values in the highlighted area unless instructed to do so by a Juice Box Pro technician.