



2012 Honda CBR1000RR

Installation Instructions



JUICEBOX^{PRO}
Premium Fuel Controller

PARTS LIST

- 1 Juice Box Pro™
- 1 USB Cable
- 1 TopTune CD-ROM
- 1 Installation Guide
- 2 Velcro strip
- 1 Alcohol swab
- 1 O2 Optimizer

THE IGNITION MUST BE TURNED OFF BEFORE INSTALLATION!

DOWNLOAD THE TOPTUNE SOFTWARE AND LATEST MAPS FROM OUR WEBSITE:


www.twobros.com

PLEASE READ ALL DIRECTIONS BEFORE STARTING INSTALLATION

401 S. Grand Ave. Santa Ana, CA 92705
(800) 211-2767 www.twobros.com

JUICEBOX^{PRO}

Premium Fuel Controller

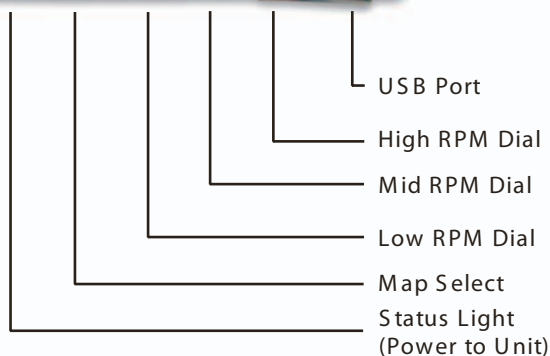

Selecting the Map Position

The Juice Box Pro comes loaded with up to ten maps. Using a #1 Phillips screwdriver, turn the map select dial to toggle between the loaded maps. Refer to the map position table below for the maps included in your Juice Box Pro.

Using the RPM Range Dials

The Low, Mid, and High RPM Dials refer to the RPM range, in thirds, of your vehicle. Each dial allows +/- 10% fuel adjustment on top of what fuel changes are done in the map. With the dial facing straight up, there is no additional fuel change. For example, if your vehicle revs to 15,000 RPM:

- the low RPM dial will adjust 0-5000 RPM
- the mid RPM dial will adjust 5001-10000 RPM
- the high RPM dial will adjust 10001-15000 RPM

Using TopTune

Take your tuning to the next level with the TopTune software.

Installing the TopTune Software

- 1 Insert the CD provided into your computer's cd-rom drive. The launch program will run automatically. If auto-run is disabled, double-click the My Computer icon then double-click the CD drive icon. Double-click TBR TopTune.exe to manually start the CD.
- 2 Click Install Software and follow the on-screen instructions to install the Top Tune software. The TopTune software and maps will be stored in C:\Program Files\TBR TopTune.
- 3 Click Map Database. All maps will automatically be installed to the C:\Program Files\TBR TopTune\maps folder.

Loading Additional Maps

- 1 Connect the USB cable from the computer to the Juice Box Pro. Verify the cable is fully seated in the Juice Box Pro.
- 2 Run the TopTune software by double-clicking the program icon installed on your desktop or on your start menu.
- 3 Click Open Map File and select a map file.
- 4 Click Send Map. You can send the map to any of the ten map positions.

Altering Maps Using TopTune

The values in the map represent a percentage of fuel change over stock. A value of 10 in the map indicates at that throttle position and RPM range the vehicle will be 10% richer than stock. If the value is -10, then it would be 10% leaner than stock. You have the ability to fine tune your fuel curve by altering these values. The TopTune software allows a value of +250 to -100 in each cell.

Position 0	Zero map	
Position 1	Stock exhaust Stock air filter	2012 Honda CBR1000RR
Position 2	Two Brothers VALE slip-on Stock or aftermarket air filter	2012 Honda CBR1000RR

Figure A



Figure B


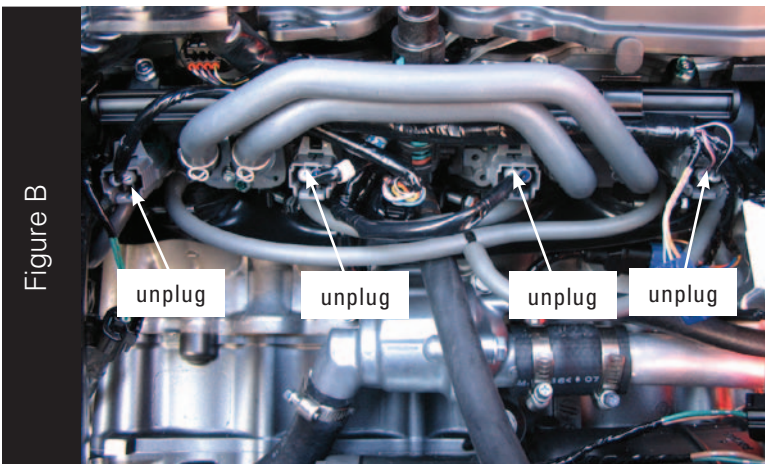


Figure C

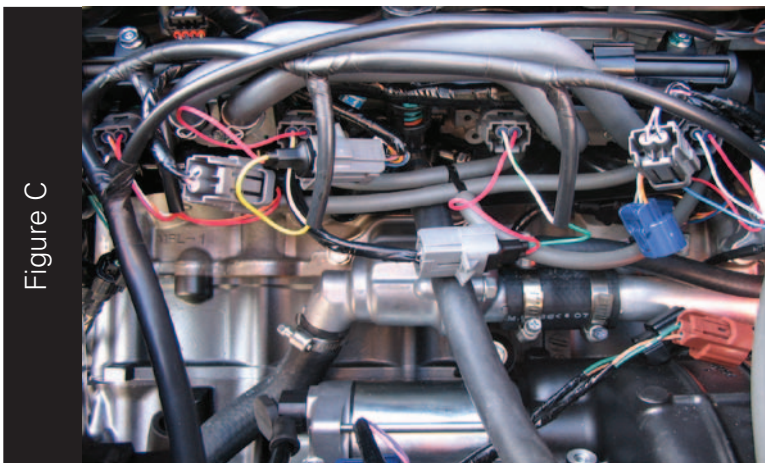

1. Remove the main seat and the passenger seat.
2. Remove the fuel tank cover.
3. Lift the fuel tank up or remove.
4. Using the supplied velcro, secure the Juice Box Pro in the tail section.
Make sure to clean both surfaces with the alcohol swab before attaching.
5. Route the Juice Box Pro harness down the left side of the bike.
6. Unplug the stock wiring harness from each injector as shown in Figure B.
The lower injectors are located on the throttle bodies.
7. Attach the Juice Box Pro connectors in-line of the stock wiring harness and the injectors as shown in Figure C.

Figure D

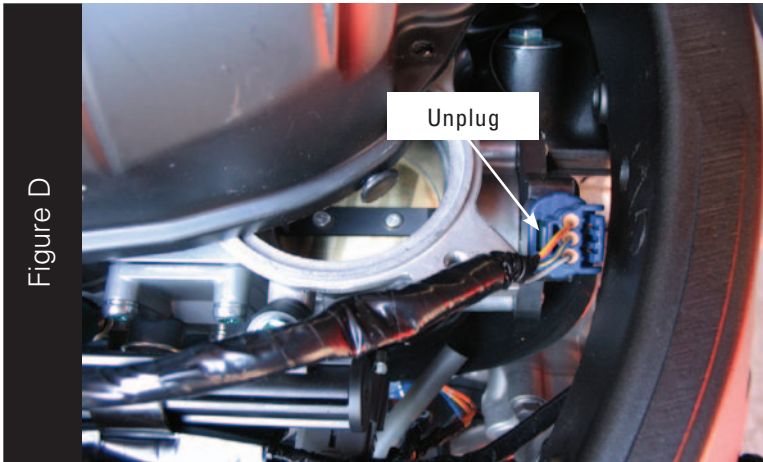


Figure E

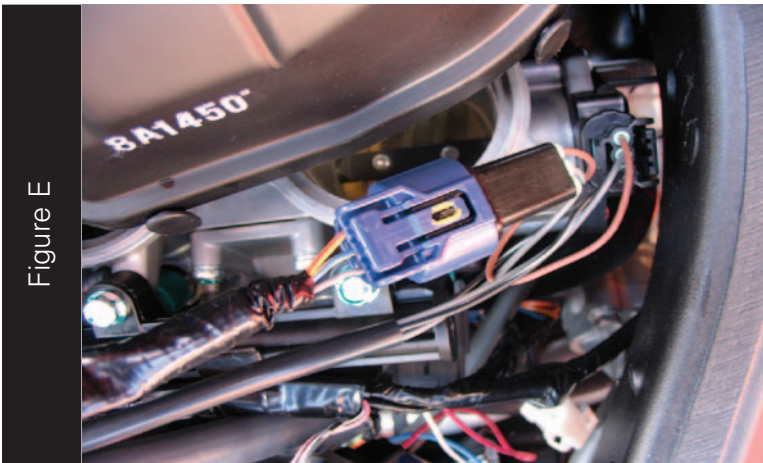


Figure F




8. Locate the Throttle Position Sensor on the right side of the throttle bodies (Fig.D).
Figure D is shown with the airbox lid moved out of the way but this is not necessary to gain access to this connector. Using a small flat blade screwdriver you can push in on the tab to release the connector.
There are a few of these same connectors on this bike in this general area. Make sure you are connecting to the one bolted to the far right of the throttle body assembly.

9. Connect the Juicebox Pro connectors in-line of the stock TPS and wiring harness as in figure E.


10. Attach the ground wire of the Juicebox Pro to the negative side of the battery.

Figure G

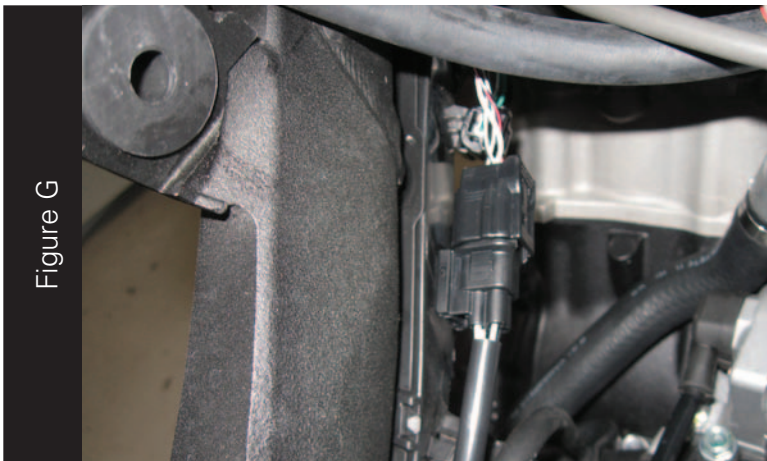

11. Locate the stock O2 sensor on the inside, left of the frame (Fig. G). Unplug the sensor.

Figure H

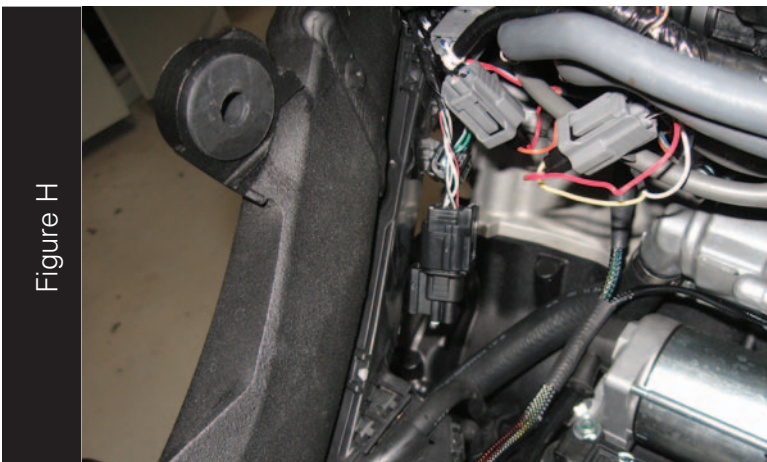

12. Plug the Juicebox O2 Optimizer into the stock wiring harness (Fig.H).
The stock O2 sensor will no longer be connected to anything and can be removed from the exhaust if desired.
13. Reinstall bodywork