specifications



PG550Prepr-2

SKOPE Gen2 Pegasus Horizontal 1/1 REMOTE 4 Door Prep Chiller (JH8304)



CABINET DIMENSIONS

External Internal

Height: 751mm* 570mm

Width: 2117mm 1769mm


Depth: 700mm 545mm


Floor area: 1.48m²

^{*} Height excludes castors or legs.

Dimensional tolerances Before installing this cabinet allow the following dimensional tolerances:			
Linear dimensions	Overall cabinet dimensions	Length of multiple cabinets At each joint	
Less than 1 metre	±5mm	±5mm	+15mm
More than 1 metre	-5mm to +10mm	-5mm to +10mm	+15mm

Evaporator box and 10 x 1/3 150mm deep pans Solid Swing Doors Power Cord with 3-Pin service compartment

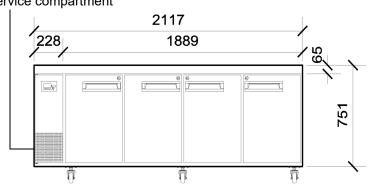



Copyright © 2008 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system: Electronic controlled, side mounted, remote refrigeration unit

Electronic controller: CAREL ir33 electronic controller

Refrigerant: Thermostatic expansion valve fitted to suit R134a/R404A/R452A

Pipe connection size: Liquid line: 1/4". Suction line: 3/8"

Remote refrigeration duty: 706 Watts @ -10°C SST

Cabinet internal volume: 560 litres

Insulation: 60mm thick, high density cyclo-isopentane polyurethane foam

Cabinet temperature range: +1°C to +5°C up to 30°C ambient

Drainage: Evaporator drain fitted inside service compartment (requires plumbing)

Electrical: 230-240 Volts a.c. 50 Hz, 4.86 Amps

Internal lighting: 2 x 5W T8 LED tubes (Ø26 x 360mm) - Door activated

Internal door opening size: 4 door openings: 570mm high x 365mm wide

Doors: Solid stainless steel, self-closing doors (with key lock) - LH & RH hinged

Worktop (optional): Accepts 10 x 1/3 150mm deep pans or 20 x 1/6 150mm deep pans

Shelves: Two levels of non-tip, adjustable tray slides and/or shelves per door

Weight: 160 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0194 Rev 5.2 Nov. 2019



