


# TRITAN

## PRECISION ROLLER CHAIN

YOUR LINK TO QUALITY.

## PRECISION TRIPLE STRAND ROLLER CHAIN

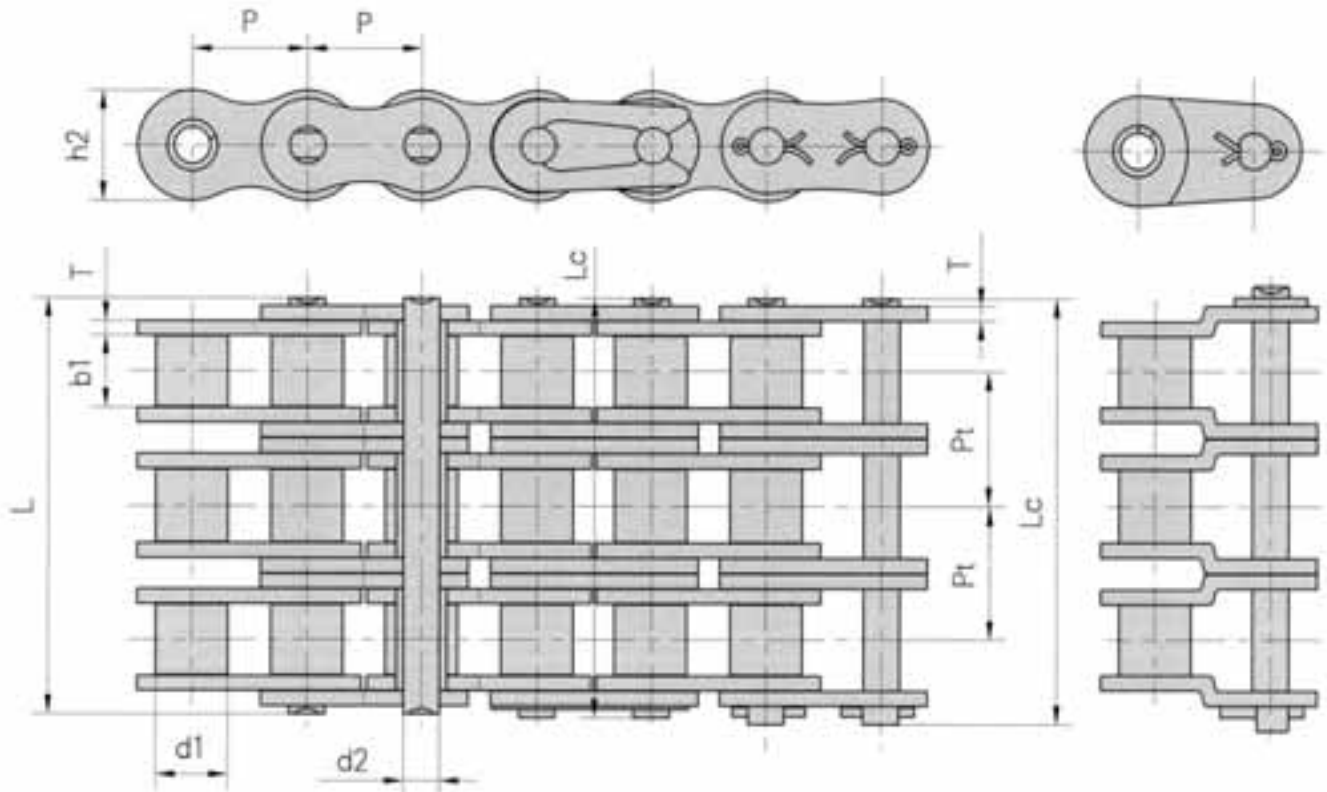

ANSI CHAIN NUMBER	PITCH	ROLLER DIA.	WIDTH BETWEEN INNER PLATES	PIN DIA.	PIN LENGTH		INNER PLATE DEPTH	PLATE THICK- NESS	TRANS- VERSE PITCH	ULTIMATE TENSILE STRENGTH	AVERAGE TENSILE STRENGTH	WEIGHT PER FOOT
	P	d1 max	b1 max	d2 max	L max	Lc max	h2 max	T max	Pt	Q min	Qo min	q
	inch	inch	inch	inch	inch	inch	inch	inch	inch	lb.	lb.	lb./ft
25-3R	0.250	0.130	0.125	0.091	0.83	0.85	0.236	0.031	0.252	2361	2833	0.296
35-3R	0.375	0.200	0.188	0.141	1.29	1.32	0.354	0.051	0.399	5328	6430	0.706
40-3R	0.500	0.313	0.309	0.156	1.79	1.83	0.472	0.059	0.566	9509	11241	1.277
50-3R	0.625	0.400	0.370	0.200	2.24	2.30	0.594	0.080	0.713	14972	17490	2.076
60-3R	0.750	0.469	0.495	0.234	2.81	2.89	0.709	0.095	0.897	21447	24976	3.051
80-3R	1.000	0.625	0.620	0.312	3.61	3.69	0.945	0.128	1.153	38240	44602	5.302
100-3R	1.250	0.750	0.744	0.375	4.42	4.57	1.181	0.157	1.408	59687	69601	7.909
120-3R	1.500	0.875	0.993	0.437	5.57	5.72	1.406	0.189	1.789	85653	98287	11.780
140-3R	1.750	1.000	0.993	0.500	5.99	6.17	1.614	0.220	1.924	116272	133380	14.918
160-3R	2.000	1.125	1.242	0.562	7.16	7.35	1.882	0.252	2.305	152961	175487	20.173
180-3R	2.250	1.406	1.397	0.687	8.05	8.28	2.110	0.283	2.592	188998	221123	25.683
200-3R	2.500	1.562	1.490	0.781	8.80	9.07	2.362	0.315	2.817	238613	273774	32.947
240-3R	3.000	1.875	1.864	0.937	10.68	10.97	2.850	0.374	3.458	344162	394879	48.114