




1. Parts list

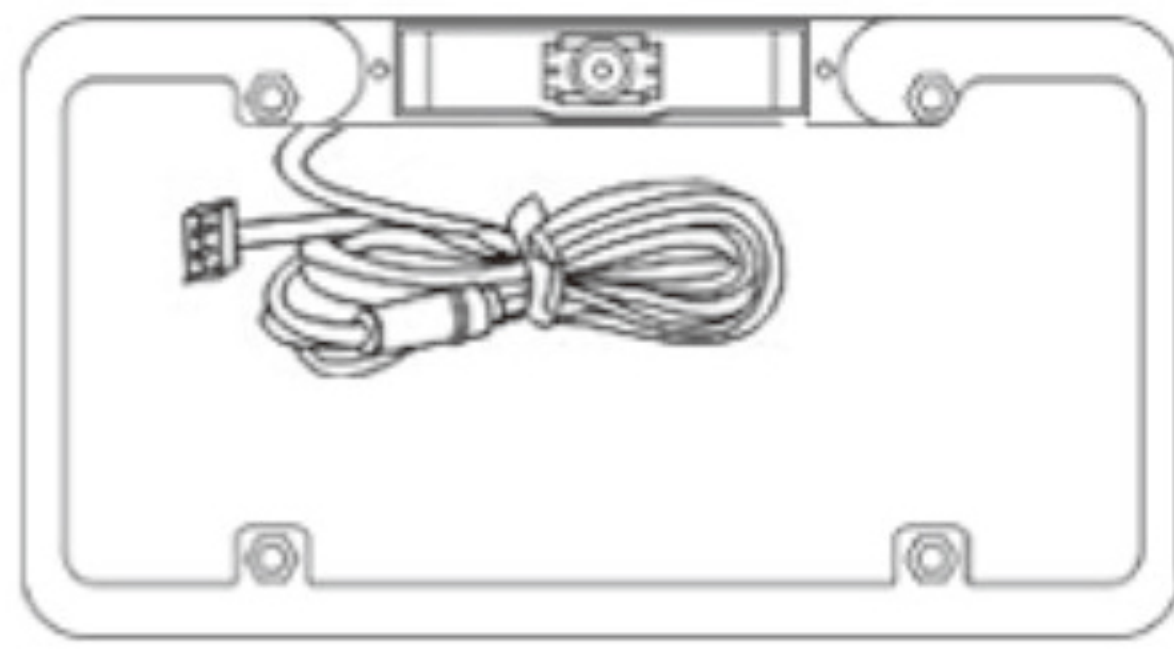

A Camera× 1

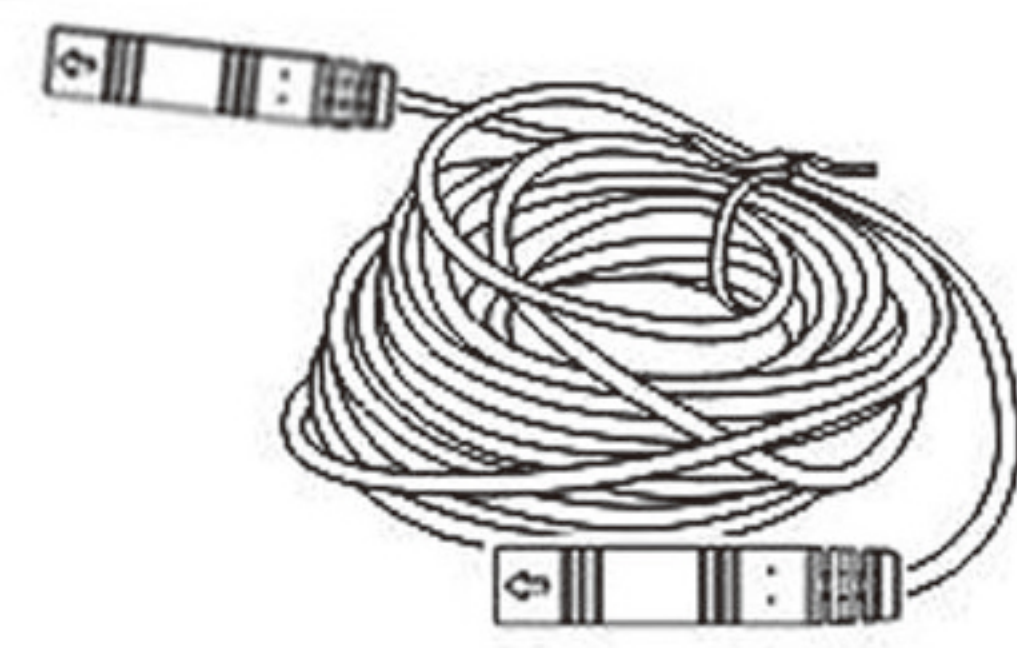

B Camera power extending line(A)×1 24FT

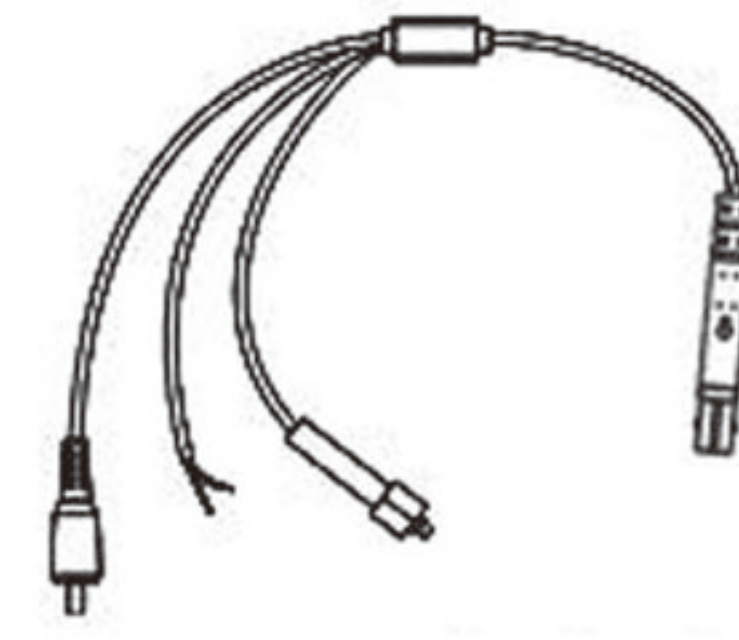

C Camera power extending line(B)× 1



D Screw× 4



E User's manual× 1

2. Function introduction

Elegant Metal finish/Beautiful design
 Standard Metal frame fits to all States
 Color CCD camera design
 150°wide angle of view
 Camera angle adjustable
 Anti-Rust Zinc metal frame & camera
 Waterproof (IP67)
 Quick & Easy Installation
 Reverse and Non Reverse view video switch

1st grade 1/4 " Color CCD camera
 Extraordinary clear picture quality
 Remarkable True Color reproduction
 Excellent Auto White Balance

Specification

Model	VTL200S/VTL300S
Imager	1/4 DSP Color Sharp CCD
Effective pixels	640(H)x480(V)
Horizontal resolution	480 TV Lines
Total number of pixels	348K
Min. Illumination	0.05 Lux at F2.0
Synchronizing system	Internal
Scanning system	2:1 interlaced
Video output	1Vp-p to 75 ohm
S/N ratio	More than 48db
Electronic iris	1/50 to 1/1000 sec
White balance	AUTO
Gain control	AUTO
Lens mount	2.1mm
Viewing angle	150° wide view angle
Power source	DC 12V(Voltage Tolerance:9V-24V)
Operating temp	-4°F~+122° F(-20°C~+50°C)
Storage temp	-40°F~+176° F(-40°C~+80°C)
Waterproof	Ip67

3. Dimension(Inches)&wiring

