



8165 E Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Report No: L101806701



Report No: L101806701

Issue Date: 11/1/2018

Report Prepared For: Horticulture Lighting Group
752 North State St, #208, Westerville, OH 43082

Model Number: HLG 550 R-SPEC

Test: Photosynthetically active radiation (PAR) & Electrical measurement

Standards Used: Appropriate part or all test guidelines were used for test performed:

IESNA LM79: 2008 Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products

ANSI NEMA ANSLG C78.377: 2008 Specification of the Chromaticity of Solid State Lighting Products

ANSI C82.77:2002: Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

Description of Sample: Client submitted the sample. Received in working and undamaged condition. No modifications were necessary.

Special Test Condition: Fixture is tested with no special conditions.

Sample Arrival Date: 10/29/18

Date of Tests: 10/29/18 - 10/30/18

Seasoning of Sample: No seasoning was performed in accordance with IESNA LM-79.

Equipment List

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S4	1/9/19
BK PRECISION	1747	PS-DC04	1/10/19
Fluke Digital Thermometer	52K/J	MT-TP05	1/10/19
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

General Information

Manufacturer:	Horticulture Lighting Group
Model Number:	HLG 550 R-SPEC
Driver Model Number:	MEAN WELL HLG-480H-C2100A

Photometric, PPF & Electrical Test Results

Total PPF (μmol/s):	1256.92	* 380 - 780nm range
Total Radiant Flux(W):	259.97	* 380 - 780nm range
Total Lumens (lm):	81138.43	* 380 - 780nm range
PPF Efficacy (μmol/Joule):	2.60	
Luminous Efficacy (lm/W):	167.81	
Input Voltage (VAC/60Hz):	220.05	
Input Current (Amp):	2.2373	
Input Power (W):	483.50	
Input Power Factor:	0.9821	
Current ATHD (%):	5.9%	

Test Condition

Ambient Temperature (°C):	25.0
Stabilization Time (Hours):	0:35
Total Operating Time (Hours):	1:00


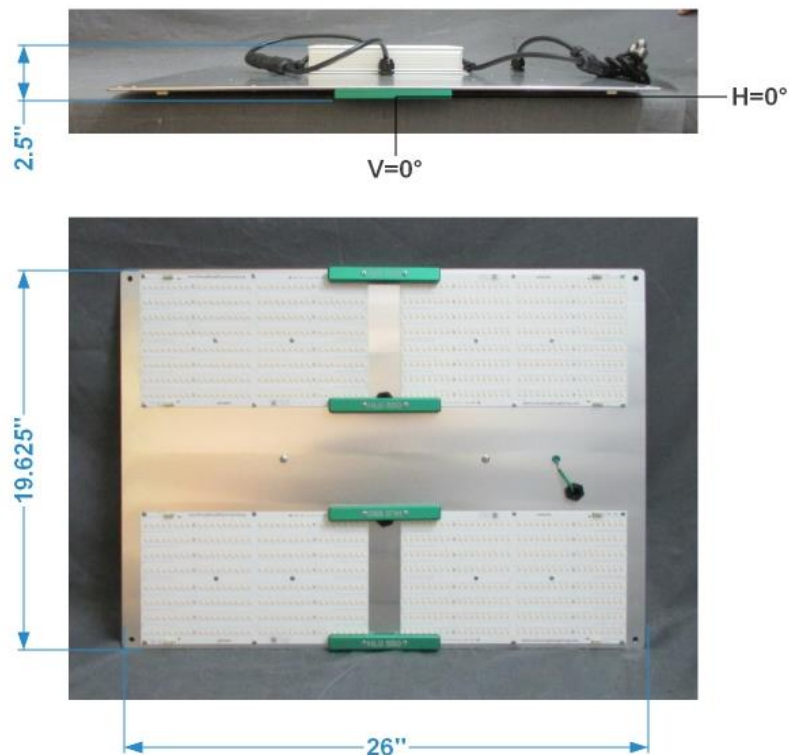


FIG. 1 LUMINAIRE

Colorimetry Test Results

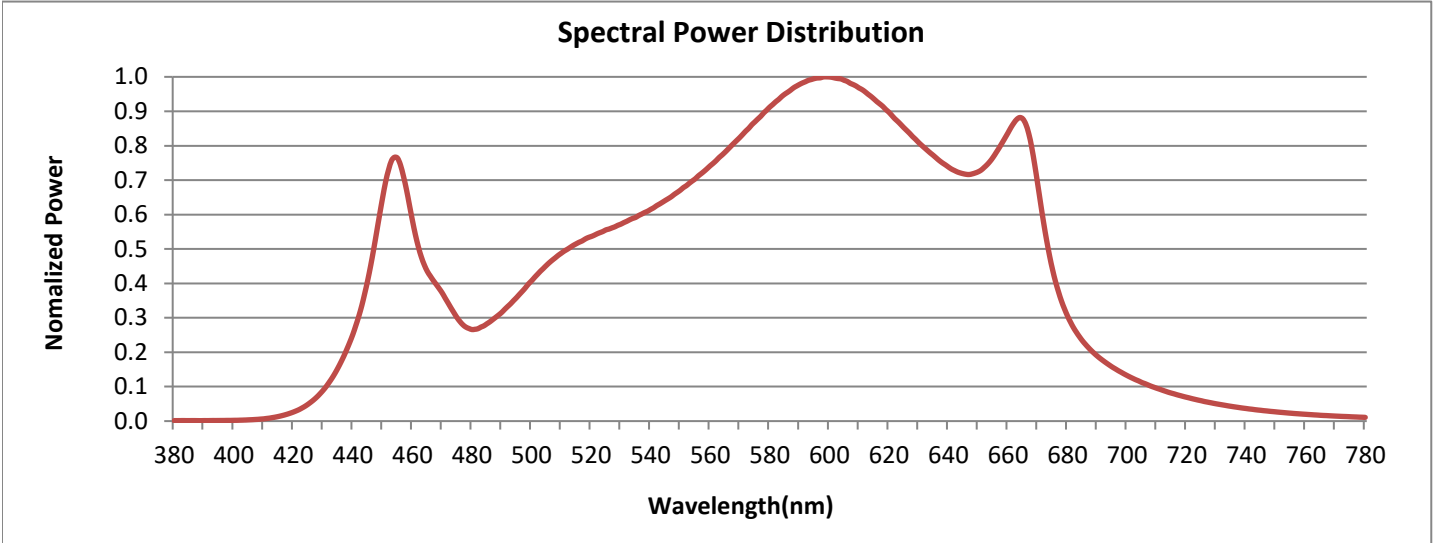


CRI & CCT

x	0.4148
y	0.3906
u'	0.2420
v'	0.5126
CRI	86.90
CCT	3298
Duv	-0.00200

R Values

R1	85.70
R2	93.90
R3	96.32
R4	84.70
R5	86.35
R6	91.84
R7	86.40
R8	69.76
R9	32.42
R10	86.18
R11	84.52
R12	74.15
R13	87.93
R14	98.61
R15	80.93

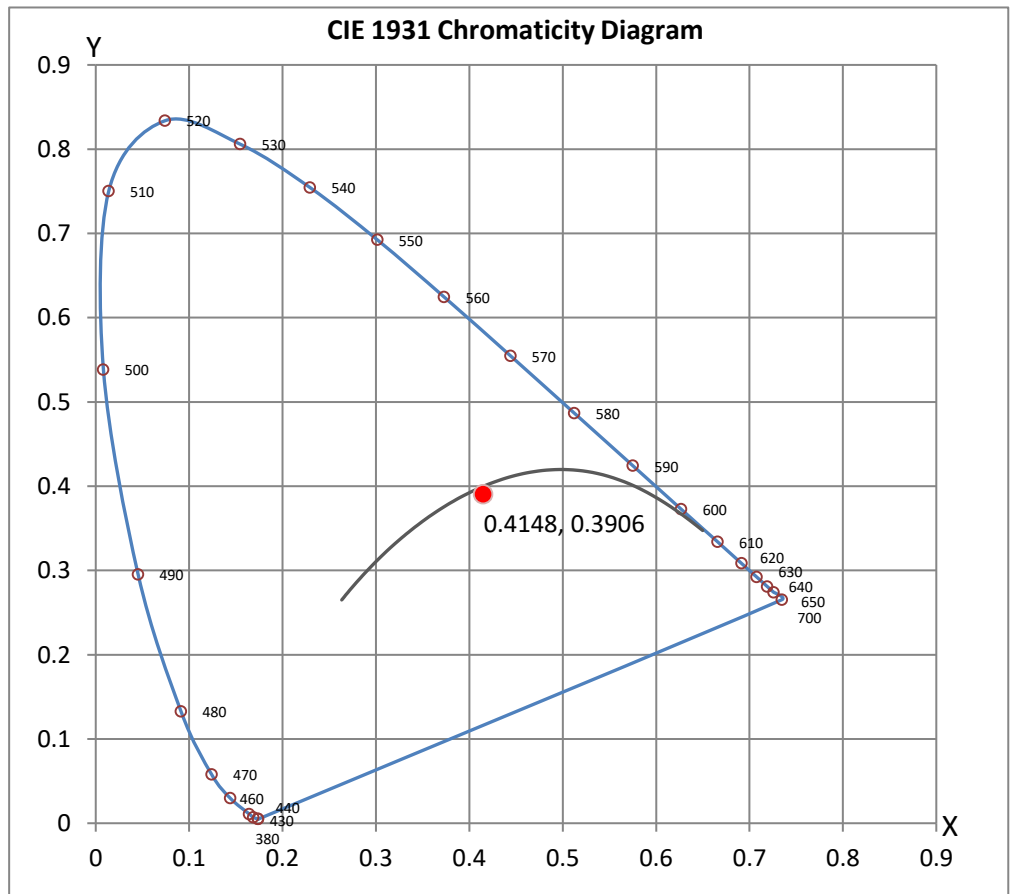

Temperature test

Per client's request, a thermocouple is placed on the back of the LED board (FIG. 2). Thermocouple temperature is measured after the fixture is stabilized.

Thermocouple Temperature (°C): 46.0

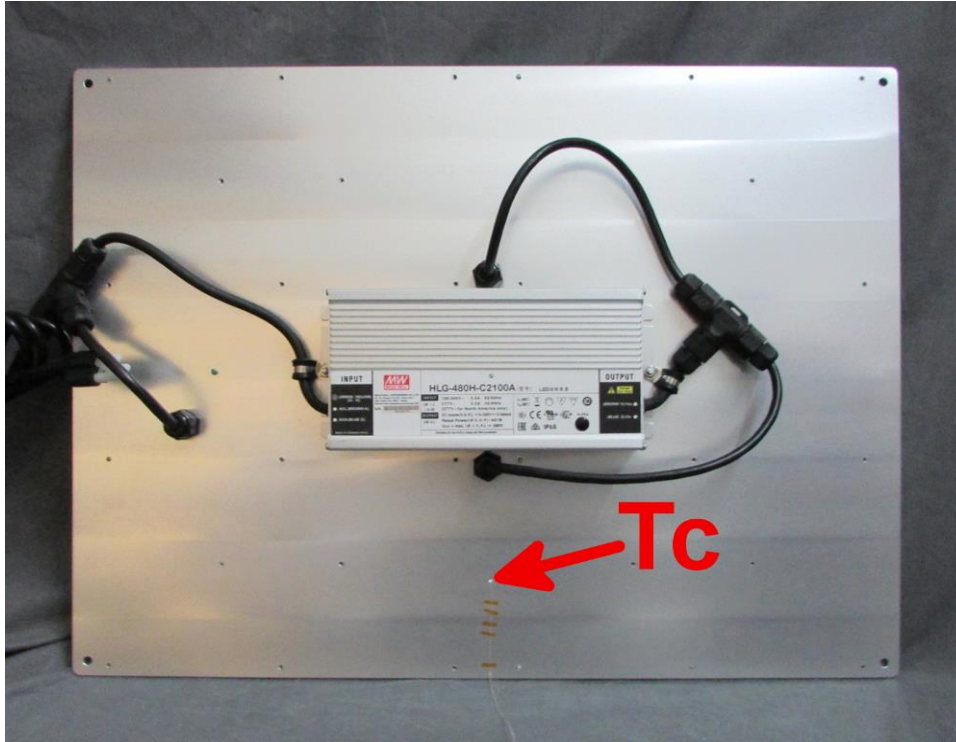


FIG. 2 Thermocouple location

Test Methods

Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Disclaimers:

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of Federal Government.

Report Prepared by : Joseph Shin

Test Report Released by:



Jeff Ahn
Engineering Manager

Test Report Reviewed by:



Steve Kang
Quality Assurance