

BakeMax[®]

America

www.BakeMax.com

Project: _____

Item: _____

Qty: _____ Date: _____

BakeMax America BAS36-24-2 – 6 Burner Gas Range w/ 24" Manual Griddle



The BakeMax America BAS36-24-2 – 6 Burner Gas Range w/ 24" Manual Griddle is designed to provide the ultimate in performance and durability. Allowing you to roast and cook a wide range of meals, with efficiency, convenience at an affordable price.

Features:

- 60" Range with 6 open-top burners, 24" manual gas griddle on right hand side and 2 standard ovens below.
- Constructed with 430 corrosion resistant stainless steel, including interior burner box which provides extra durability and easy to clean.
- All supporting brackets inside burner box are made of 304 stainless steel which is resistant to oxidation and corrosion.
- Double wall construction with heavy insulation for cooler operation.
- Thermostat oven control provides heat from 150 F to 500 F.
- 24" wide highly polished griddle plate, 3/4" thickness and 19" deep
- Matchless push button ignition to light the oven pilot light
- Cast iron oven burner with "H" format, developed to achieve the best performance, providing a more uniform heat transfer with low consumption. Each burner reaches 30,000 BTU's
- Each burner container a pilot igniter (always on), the oven has a security valve and thermostat valve. Providing a safety where the pilot flame is connected to the safety valve, preventing the gas to leak if the flame extinguishes.
- Star pattern for the top burners with no gaskets to leak. Each burner provides up to 30,000 BTU's
- Each burner has its own pilot light for instant ignition
- Top grates are 12"X12" cast iron with spill over bowl that also reflects heat for added efficiency. They are easily removable
- Large 7" flame spread offers a more efficient burn pattern for both small and large pots
- 6" heavy duty stainless steel pipe legs with adjustable feet
- 6" deep front stainless steel ledge even with the burners
- 1 chrome rack for each oven, 2 rack positions
- Oven is fully enameled / porcelain interior
- Oven door lifts off easily for cleaning and maintenance
- Removable drip tray to catch crumbs or spillage
- 3/4" rear gas connect and pressure regulator
- LP conversion kit included
- Safety gas shut-off valve for whole oven
- Two year limited parts and labor warranty



Removable Crumb Tray & Oven Door
(Model BAS240 Displayed)





Cast Iron Grate

** Due to continuous product improvement, specifications are subject to change without notice.

BakeMax[®] / Titan Ventures International Inc.

Warehouses:

170 Millennium Blvd, Moncton, NB, E1E2G8 
1605 Crescent Cr Carrollton, TX, Dallas, TX 75006 

Toll Free: 1-800-565-BAKE (2253)

Phone: 506-858-8990

Fax: 506- 859-6929

Email: Sales@BakeMax.com

BakeMax America BAS36-24-2 – 6 Burner Gas Range w/ 24" Manual Griddle


Technical Specifications & Drawings

Model	Width	Depth	Height	Burners	BTU NG	BTU LP	Orifice #	
							Gas	LP
BAS36-24-2	60" (1524mm)	30.5" (775mm)	58.7" (1490mm)	6	282,000	282,000	33	51


***Warning:** The minimum supply pressure on this appliance must be set at 4 water column inches for natural gas and 10 water column for propane gas. Each unit has a 3/4" gas connect at the rear of the appliance.

Shipping Information

Model	Net Weight lbs/kg	Crated Weight lbs/kg	Crate Dimensions (D x W x H)
BAS36-24-2	708lbs/321kg	841lbs/382kg	64"X42"X44"

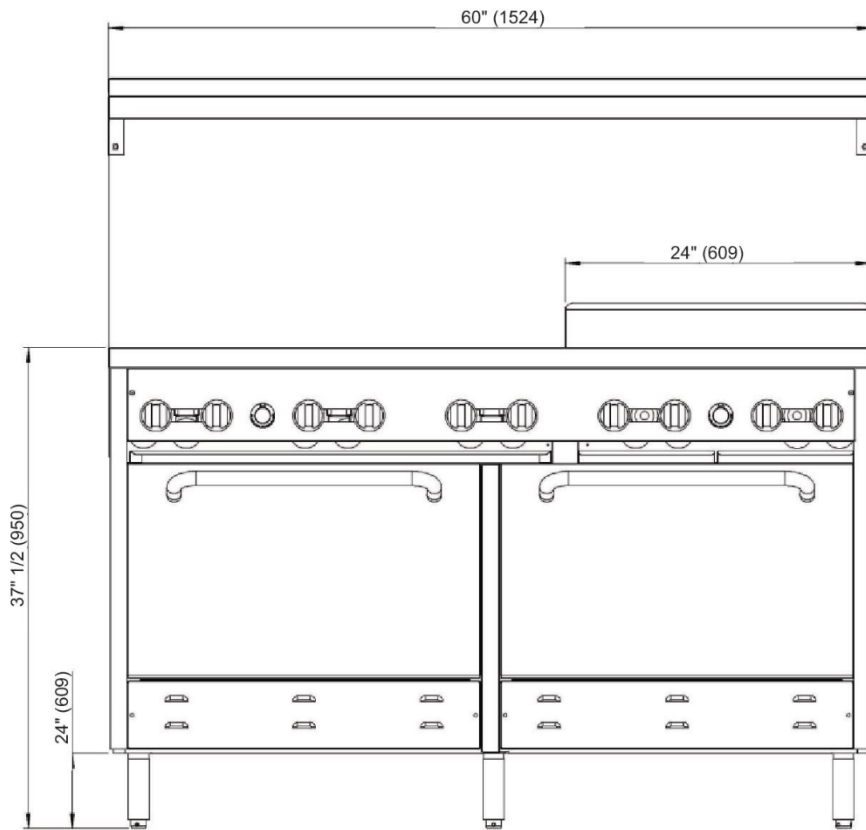

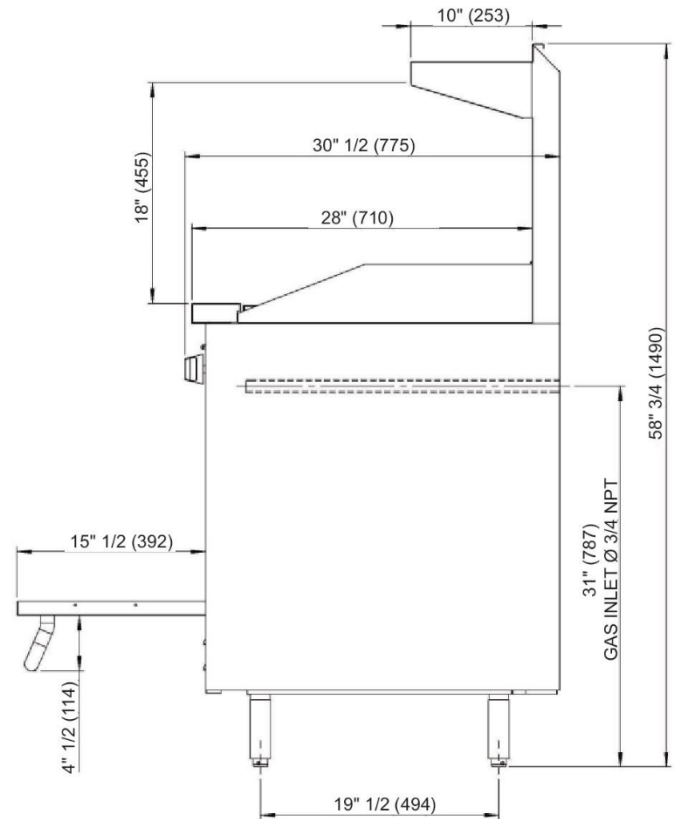

Front View



Side View

BakeMax® / Titan Ventures International Inc.

Warehouses:

170 Millennium Blvd, Moncton, NB, E1E2G8 
 1605 Crescent Cr Carrollton, TX, Dallas, TX 75006 

Toll Free: 1-800-565-BAKE (2253)

Phone: 506-858-8990

Fax: 506- 859-6929

Email: Sales@BakeMax.com