

CB048 Product Features and Specs



Description

Cookshack CB048 Charbroiler is designed to give the wood-grilled flavor people love featuring an electronically controlled pellet-cooking system. The system is fueled by 100% food-grade wood pellets that are introduced into its firepot by an auger requiring a small amount of electricity to operate. Food tastes fabulous when cooked over pellet smoke!

How It Works


- Heat and flavor are supplied by 100% wood pellets
- Controls and automatic ignition system eliminate the need to build and maintain a fire
- Electronically controlled pellet-cooking system keeps the charbroiler cooking at consistent temperatures
- Pellets are introduced into a firepot by an auger system
- Features "HI," "MED," and "LO" settings to fit your needs

Efficient

- Heavy duty cast iron grates distribute heat evenly and eliminate hot spots
- Real wood smoke flavor, consistency and easy to use settings

Pellets

- Pellets are clean burning, produce very little ash and create low creosote buildup
- Approved by all major cooking competition sanctioning bodies

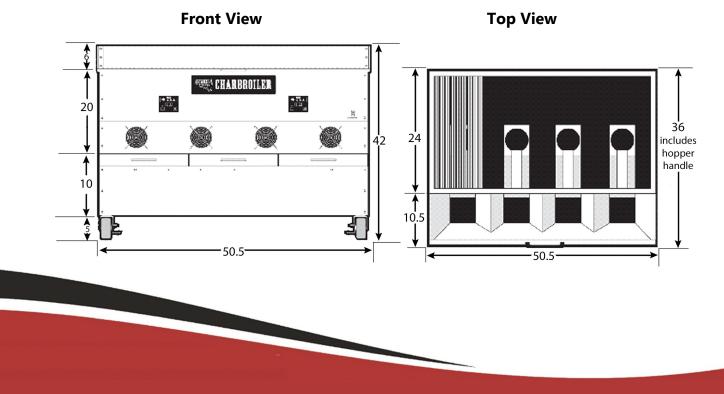



Venting Requirements

The unit must be installed per state and local fire codes and NFPA 96. Local Code Officials and a Commercial Kitchen Ventilation Contractor should be consulted prior to installation to determine the need to obtain a permit.

Open hearth broilers create a good deal of heat and smoke and should be installed under an efficient exhaust hood.

We recommend a standard Class 1 Hood with fire suppression due to the small amount of particulate being released. Double check all local codes, some local codes may require a solid fuel hood.

The Charbroilers are pellet fired; however, the unit uses electricity to control the temperature and ignite the pellets

CB048 Specifications	
Outside Dimensions	50.5"W x 42"H x 36"D
Food Capacity	32 Ribeyes (12 oz. each), 32 NY Strips (11 oz. each), 40 Filets (8 oz each), 40 Chicken Breasts (8 oz. each) or 40 Hamburgers (4 oz each)
Cooking Area	960 sq. in.
Grates	(8) Heavy duty cast iron grates are 1.5" thick; 6 x 21.5"
Temperature Settings	Low : 250°F average temperature Med: 500°F average temperature High: 700°F average temperature
Electrical	120V, 11 amps; cord length is approximately 54" (may vary by 6")
Fuel Source	100% wood pellets
Pellet Hopper Capacity	80 lbs. of pellets
Appx Fuel Consumption	Low (250°F average temperature): 4 lbs. per hour Med (500°F average temperature): 8 lbs. per hour High (700°F average temperature): 12 lbs. per hour
Appx. Cost of Operation	\$2.95 for a 1 hour cycle at average settings (includes electric and pellets)
Shipping Weight	790 lbs. (590 lb. charbroiler and 200 lbs. of pellets ship on separate pallets)
Standard Equipment	8 cooking grates, grate removal tool, 3 drip trays, 4 heat deflectors, operator's manual and 200 lbs. pellets
Warranty	All Cookshack products are backed by a 2 year limited warranty including 90 days full parts and labor.