


NOTES:

1. COIL LEADS INSIDE OUTLET BOX AND SECURE COVER AFTER TESTING.
2. NO KNOCKOUTS REMOVED.
3. ATTACH GROUND LEAD TO HOUSING WITH PC 325 SCREW.
4. 1 PER CONTAINER, 48 MAX PER PALLET, PACKING ASSY: 87854914
12 CARTONS PER LAYER, 4 LAYERS PER PALLET. P.S. 88834200 AND P.S. 88834408
5. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE P.S. 88834408.
6. NO PACKAGING TAPE OVER CARTON LABEL.

APPLICATION	COUNTER SALES									
	B	LA	FR	A	S	C	E	B	A	
	18	63	30	V	06	DH	5	3	0	
CUSTOMER	FASCO DIST.									
CUSTOMER PART NO.	B45227									

LEAD MATERIAL
18 GA. 125°C 2/64 INSUL.
X-LINKED POLY. BLK
8.00/6.00 IN. LONG
.56/.44 IN. STRIP

GROUND LEAD
18 GA. 125°C 2/64 INSUL
X-LINKED POLY. GRN/YEL
5.00/4.00 IN LONG
W/RING TERM 89020156
AMP 61794-4

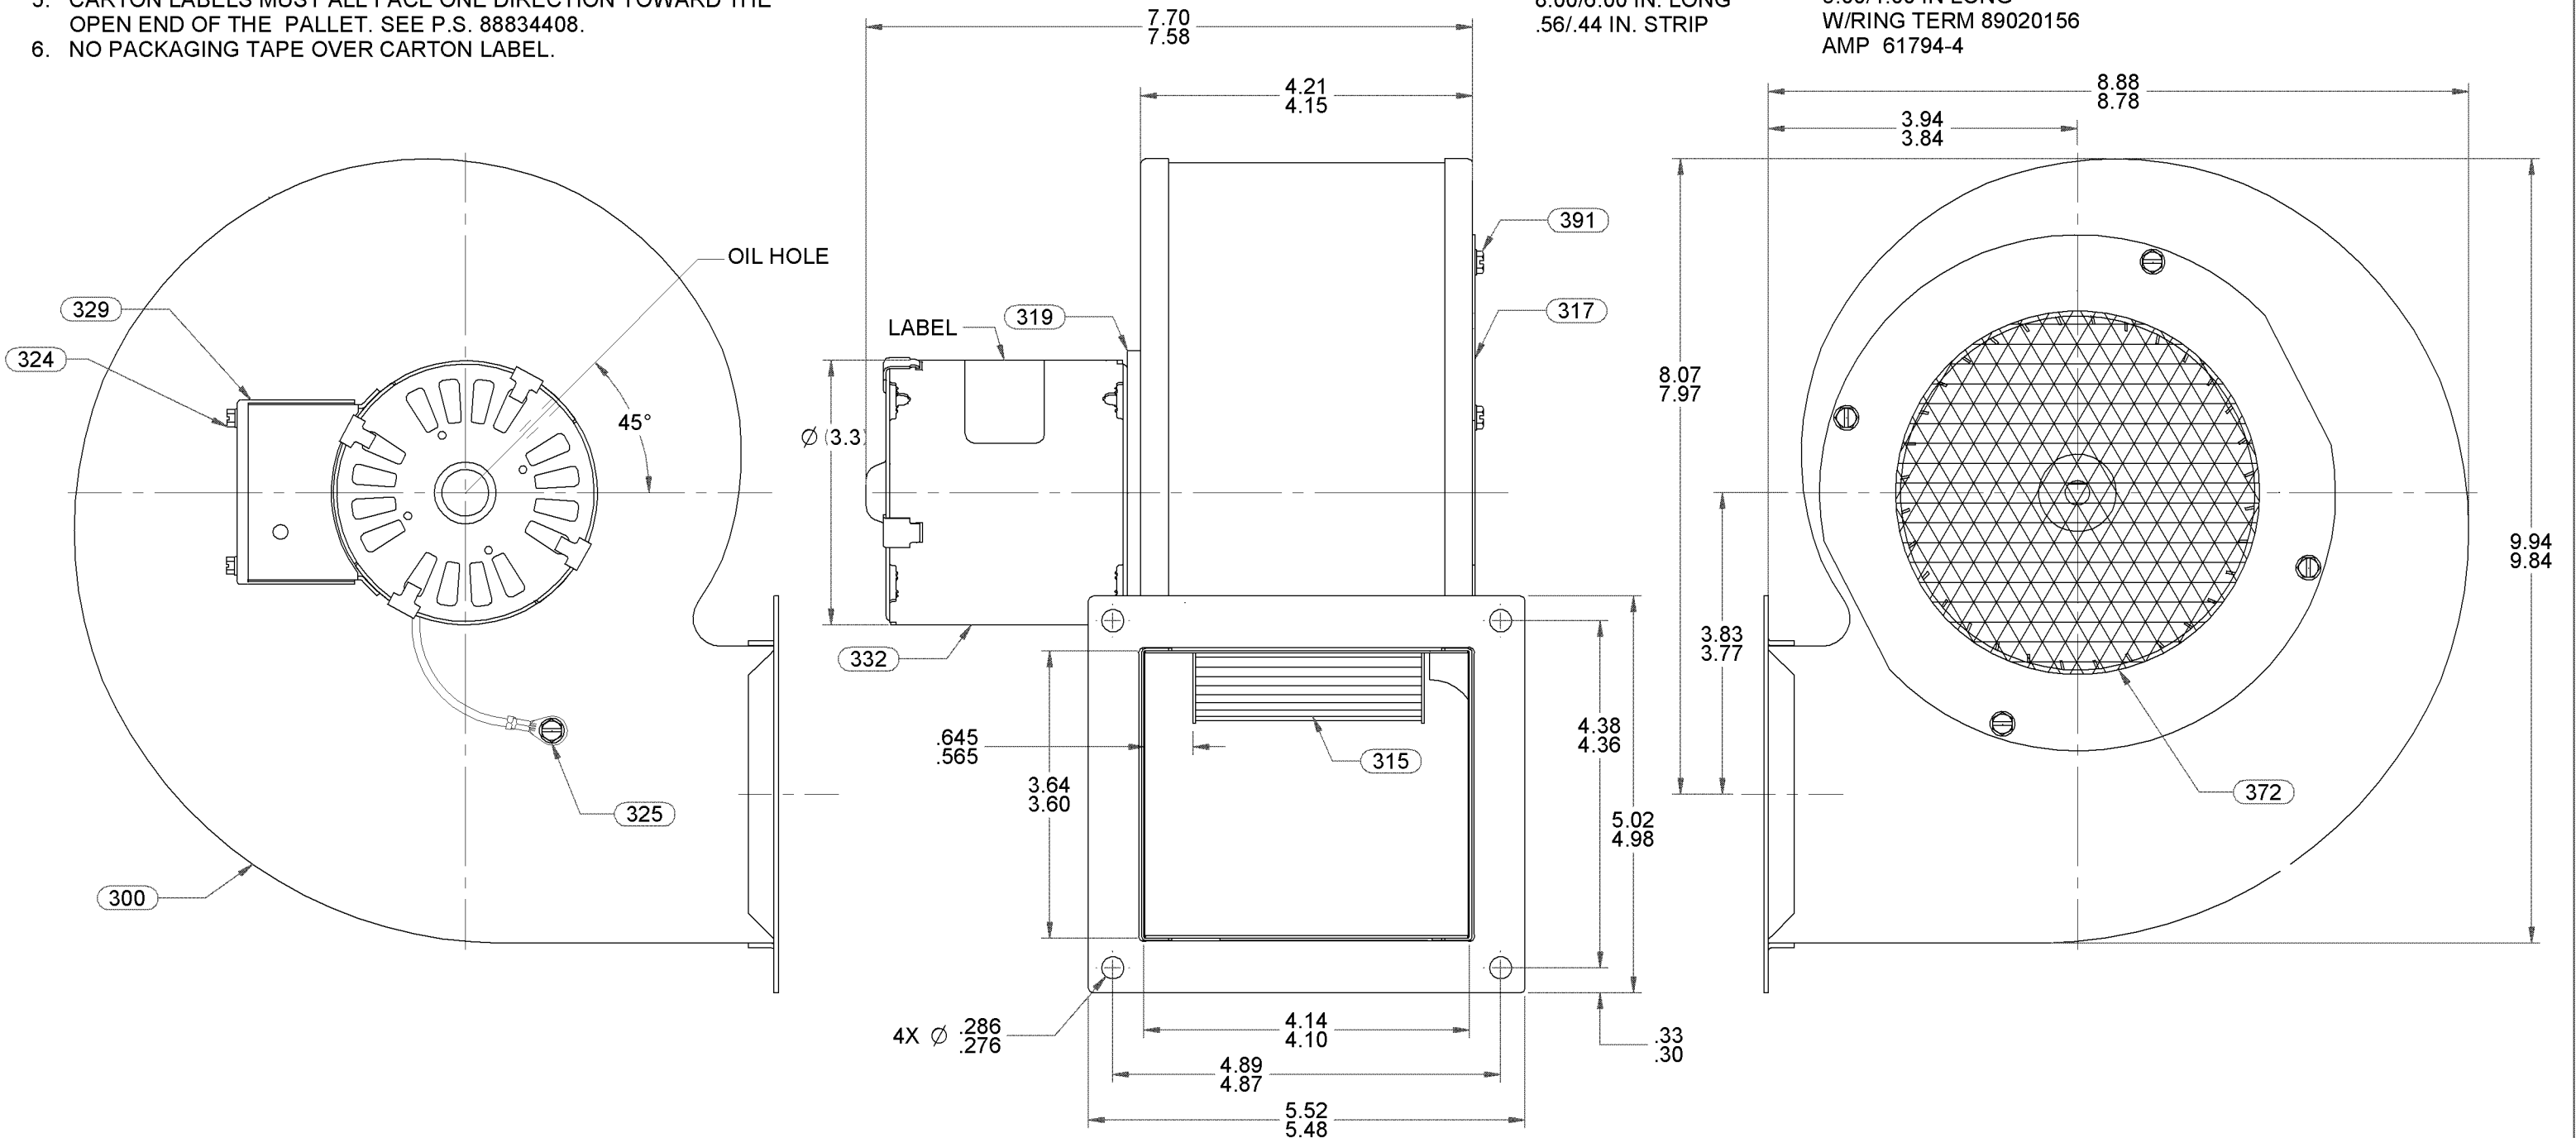

TYPICAL PERFORMANCE TEST DATA IN FREE AIR

ECO. NO.	REV.	DATE	APPROVAL
4005352	32	4/24/2012	SED/MLM
4010259	33	9/9/2013	MLH/SDM

AT 115 VOLTS 60 HZ.			
	R.P.M.	WATTS	AMPS
	1570	115	1.62
BLOWER WEIGHT			END PLAY
8 LBS.			.050/.010

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
FRACTIONS ± 1/16 DECIMALS XX ± .01 ANGLES ± 1°
XXX ± .005

APPROVALS	DATE
DRAWN MLM	9/1/06
CHECKED VLL	9/1/06
FINISH COLOR	BLACK

FASCO FASCO MOTORS GROUP
AC MOTOR/BLOWER DIVISION

CONFIDENTIAL: DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.

TITLE		
BLOWER ASSEMBLY		
SIZE	DWG. NO.	REV.
B	7063 4343	33
DO NOT SCALE DRAWING		SHEET 1 OF 1