


07	REVISED TO NEW N/P FORMAT	02/12/2008	08	PICTORIALLY REMOVED BARCODE FROM N/P LABEL	SD 2-11-10	09	REVISED PACKING QUANTITIES	4005138 SD 4/2/2012	STANDARD TOLERANCES: ANGULAR +/- 1 DEGREE 2 PLACE DECIMAL +/- .01 3 PLACE DECIMAL +/- .005
----	---------------------------	------------	----	--	------------	----	----------------------------	------------------------	---

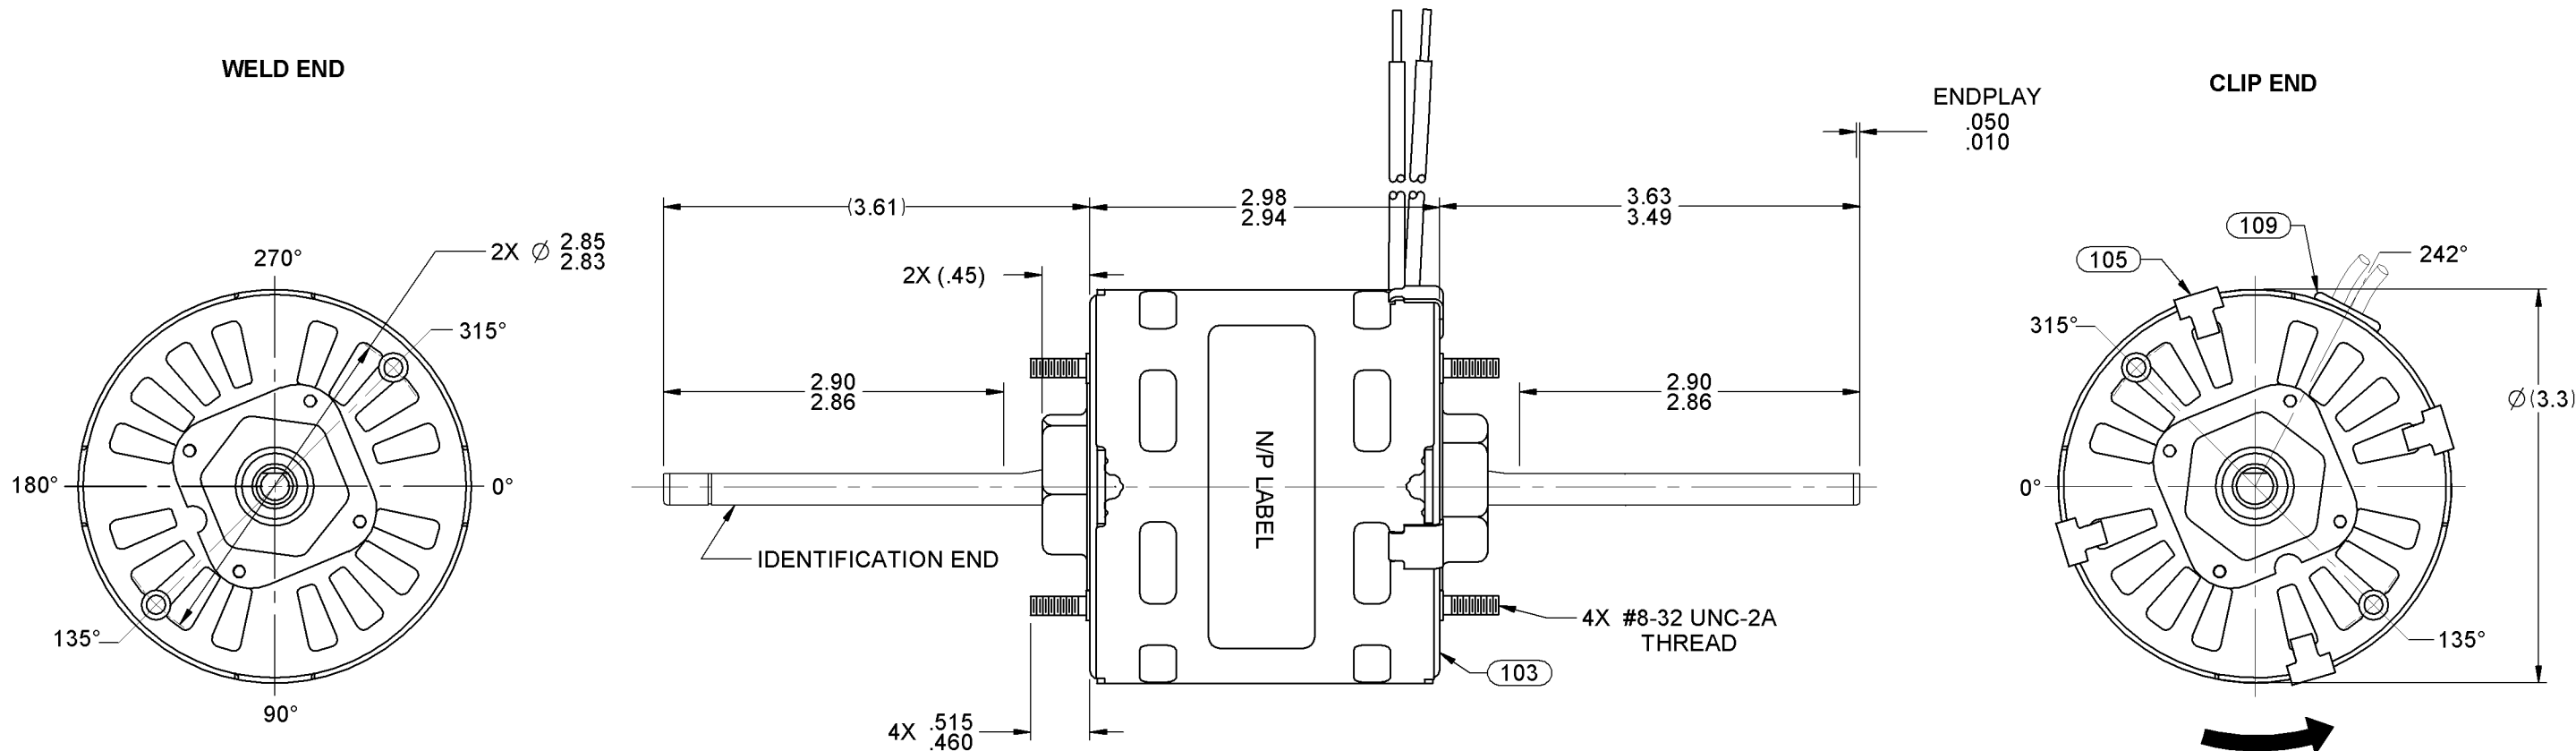

LEAD MATERIAL
18 GA. 125°C 2/64 INS.
X-LINK POLY., BLACK
20.00/18.00 IN. LONG
.56/.44 IN. STRIP

0046-4072

0046-4282

FASCO Motor Division

Assembled In Mexico

No. 71639477	TYPE U63B1	T.P. AO
115 V	60 Hz	Class B
1.9 A	1550 RPM	1/20 HP
Model D1165		Max Amb: 40°C
LR6319		

SAFETY WARNING

This Motor Must Be Grounded in Accordance With Local Or National Electrical Codes To Prevent Possible Injury Due To Electrical Shock

NOTES:
PACK 126 MAXIMUM MOTORS PER PALLET.
NO PACKAGING TAPE OVER CARTON LABEL.

FRONT SHAFT POSITION UP HORIZONTAL DOWN	* TYPICAL PERFORMANCE AT 115 VOLTS 60 Hz.												CUSTOMER: FASCO DIST.	FASCO FASCO MOTORS GROUP AC MOTOR/BLOWER DIVISION
	MOTOR SPEED	IDLE			LOADED			LOCKED			BREAK	PART NUMBER: D1165		
R.P.M.		AMP.	WATT	IN.OZ.	R.P.M.	AMP.	WATT	IN.OZ.	AMP.	WATT	IN.OZ.	APPLICATION: COUNTER SALES	CONFIDENTIAL: DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.	
	1765	1.61	89	37.8	1550	1.89	142	14.2	2.62	192	41.2	MOTOR WEIGHT: 2.38 POUNDS	MOTOR TYPE	
CUSTOMER APPROVAL:												ENVIRONMENT: DRY	DRAWING NUMBER	
SIGNED:												FINISH COLOR: BLACK	SHADED POLE	
DATE:												DRAWN BY: S. M. MAGGARD	7163 9477	
												DATE DRAWN: 3-25-2002	B LA FR A S C E B A	
													REV. 09	
													00 63 30 V 05 FF 5 3 0	

If Printed, this is an Uncontrolled Document.