


4				3					Uncontrolled Copy			2			1	
S.NO	CONNECTION	COLOR	EXIT TYPE	EXIT LOC (VIEWING LE)	GAGE	MATERIAL	WALL THK.	LENGTH	TERMINATION			NAMEPLATE DATA				
1	COMMON LEAD	WHITE	SHELL NOTCH	5:00	18	THERMOPLASTIC	4/64	27.25	.50 BWS			MODEL	5KCP39MGZ522S			
2	CAPACITOR LEAD	BRN/WHT	SHELL NOTCH	5:00	18	THERMOPLASTIC	4/64	27.00	.25 FQC			CUST. P/N	D788			
3	CAPACITOR LEAD	BROWN	SHELL NOTCH	5:00	18	THERMOPLASTIC	4/64	27.00	.25 FQC			HP	1/2			
4	HIGH SPEED LEAD	BLACK	SHELL NOTCH	5:00	18	THERMOPLASTIC	4/64	27.25	.50 BWS			RPM	1625			
5	REV LEAD	PURPLE	SHELL NOTCH	5:00	18	THERMOPLASTIC	2/64	5.25	.25 ISQC LO INS FORCE			VOLTS	208-230			
6	REV LEAD	BROWN	SHELL NOTCH	5:00	18	THERMOPLASTIC	2/64	5.25	.25 ISQC LO INS FORCE			HZ	60			
7	REV LEAD	ORANGE	SHELL NOTCH	5:00	18	THERMOPLASTIC	2/64	5.25	.25 MALE ISQC			SPEEDS	1.0			
8	REV LEAD	YELLOW	SHELL NOTCH	5:00	18	THERMOPLASTIC	2/64	5.25	.25 MALE ISQC			AMPS	4.00			
9	GROUND LEAD	GRN-YEL	CLAMPSCREW	4:30	18	THERMOPLASTIC	2/64	12.50	#10 SERR EYELET			CAP. REQ'D-D1	5.00µfd/370 Volts			
												CAP. REQ'D-D2	#N/A			
												CONN.DRW#	NP24X350357			
												ROTATION	CCW/CW (VIEW FROM LE)			

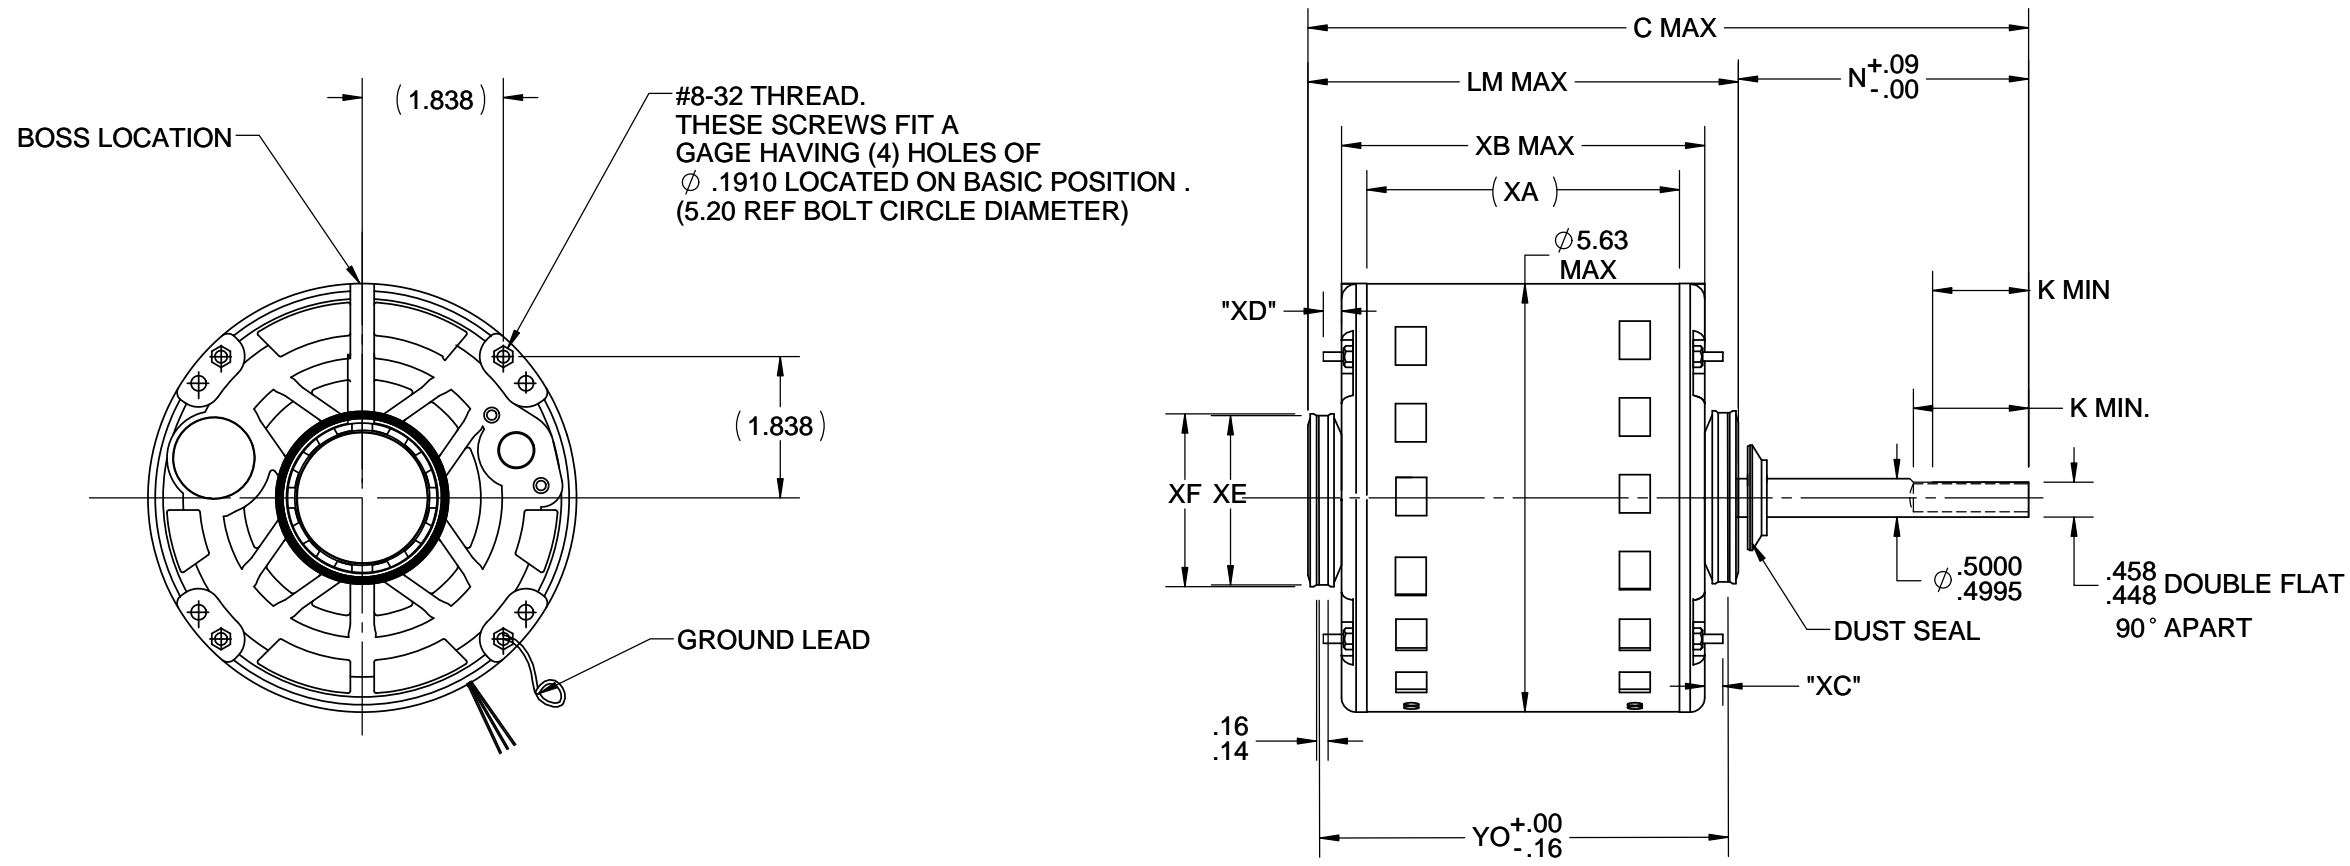

NOTE:

1) DIMENSIONS SHOWN ARE NOMINAL UNLESS OTHERWISE SPECIFIED.

2) NAME PLATE LABEL LOCATION :360° - CENTER - READ FROM LE.

	2.22	2.25	1.00	.75	5.64
	XE	XF	XC	XD	YO
11.39	5.50	4.59	5.81	4.32	4.98
C	N	K	LM	XA	XB

VENTILATION SYSTEM	
SHELL VENTS	OPEN
ENDSHIELD (OPP.LEAD END)	CLOSED
ENDSHIELD (LEAD END)	OPEN

DRAWING REVISION D	REVISION BY J. RUPERT	DATE 10-26-2016
ECO ECO-0111879	APPROVED BY J. RUPERT	DATE 10-26-2016
ECO DESCRIPTION CONN DIA. WAS NP24X350273		
<small>COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.</small>		

TOLERANCES UNLESS OTHERWISE SPECIFIED:

DEC.	INCH	mm	ANGLE
.X	±0.1	[±2.5]	±7° 30"
.XX	±0.03	[±0.76]	
.XXX	±0.005	[±0.127]	
.XXXX	±0.0005	[±0.0127]	

REMOVE BURRS & BREAK SHARP
 EDGES: .003/.015 [.076/.381]
 CORNER FILLETS: .02 [.51]
 MACHINED SURFACES: 200 INCH / 5.1 mm

mm SHOWN IN [BRACKETS]

DRAWN BY
MVG

DATE
07/11/2014

APPROVED BY
MVN

DATE
07/11/2014

REFERENCE

THIRD ANGLE PROJECTION

REGAL™ Regal Beloit America, Inc.

OUTLINE
(CUSTOMER NAME : FASCO IND)

MATERIAL: _____ PROCESS/FINISH: _____

SIZE: **B** DRAWING NUMBER: **5KCP39MGZ522S** SHEET: 1 OF 1