

INSTRUCTION SHEET

Buell
AMERICAN MOTORCYCLES

-J01373

Kit Number 61600-99Y

REV. 8-18-98

X-1 TANK BAG

General

This kit fits 1999 X1 model motorcycles.

NOTE

A Service Manual for your motorcycle is available from your Buell Dealer.

NOTE


There are no Service Parts available with this kit.

⚠WARNING


Do not carry items with a combined weight of more than 8 lbs (3.6 kg) in bag. Improper loading may adversely affect handling, leading to personal injury.

Installation

1. See Figure 2. Secure one side strap on each side of the tank by looping around the upper frame tube as shown.
2. Place short cross strap into position as shown in Figure 1.
3. See Figure 3. Attach a plastic buckle to each side strap.
4. Remove the seat according to Service Manual instructions.

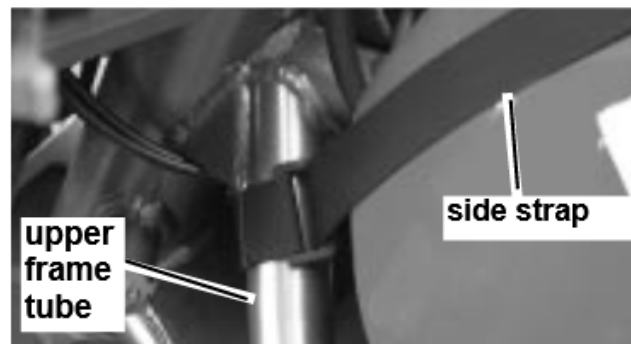

Loop side strap around upper frame tube

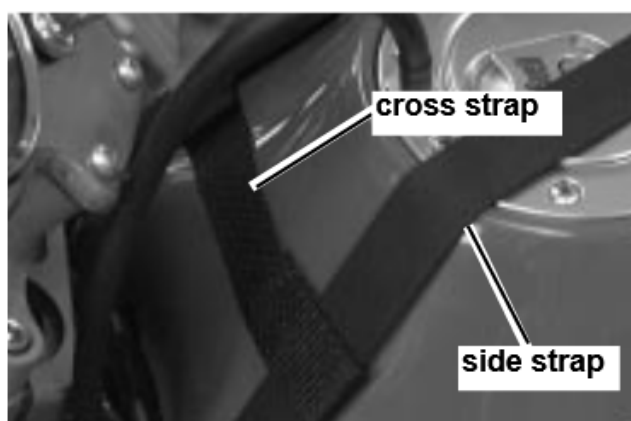

Place cross strap into position

Figure 2. Attaching bag to upper frame tubes



Figure 1. Amigo Tank Bag



Figure 3. Attach buckle to ends of side straps

5. Remove the tank cover according to Service Manual instructions.
6. See Figure 4. Remove the fuel cell mounting bracket by removing the two bolts securing it into place.
7. Place the rear strap of the Amigo tank bag so that the fuel cell mounting bracket will be over it when reinstalled.
8. Reinstall the fuel cell mounting bracket with the two original bolts. The tab on the rear strap should be positioned fully behind the bracket. Test to see if the strap is properly installed by pulling upward on the strap. If the strap comes loose, reinstall the strap following Steps 7 and 8.
9. Replace seat.

⚠WARNING

After installing seat, pull upward on front of seat to be sure it's locked in position. If seat is loose, it could shift position during vehicle operation and startle the rider, causing loss of control and personal injury.

10. Secure the bag in place with the three buckles. Pull the front two straps tight so that the bag fits snugly against the tank.

⚠WARNING

After installing the tank bag, pull upward on the bag to be sure it's securely installed. If the bag is loose, it could shift position during vehicle operation and startle the rider causing loss of control and personal injury.

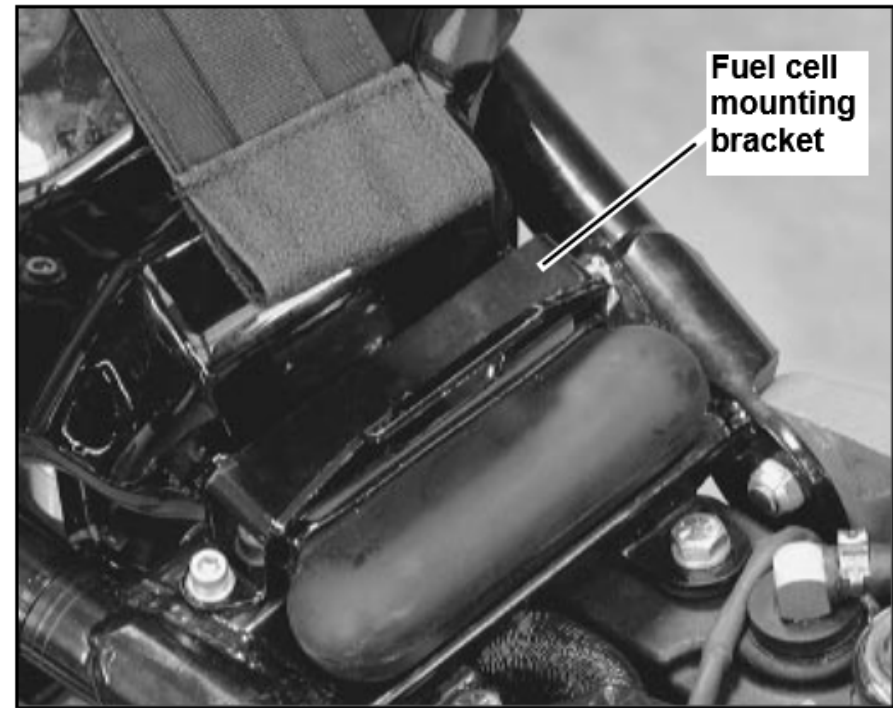


Figure 4. Fuel cell mounting bracket