




Proudly Manufactured in the USA

4-Way Feeder Tube Mounting:

- After assembly of the steel feeder base is complete and the feeder tub is in place, you are ready to install the 4-way feeder tube to the tub. Start by mounting the feed tube collar to the bottom of the feeder tub. Use (8) ¼"x2" bolts, (16) ¼" flat washers, (8) ¼" lock washers, (8) ¼" nuts. You can use a silicone caulk between the tube and tub if desired. Tighten all bolts. **DO NOT OVER-TIGHTEN!**



- Slide the 4-way feed tube inside the collar. Adjust the height of the collar to one of the three mounting holes (A B or C). Secure the feed tube to the collar with (2) $\frac{1}{4}$ " x $\frac{3}{4}$ " bolts and (2) $\frac{1}{4}$ " flat washers. Tighten all bolts. **DO NOT OVER-TIGHTEN!**

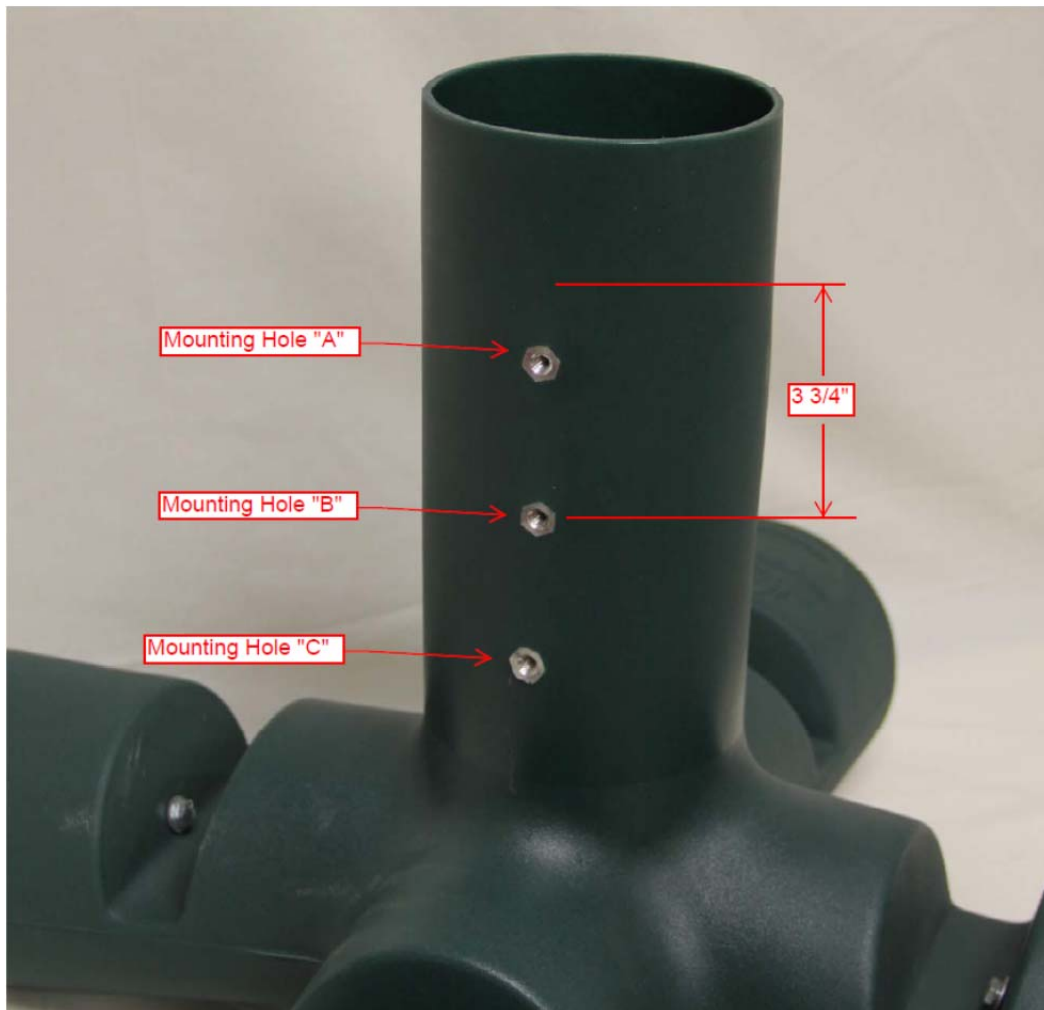

- If you select mounting holes B or C you may elect to cut the excess height of the 4-way feed tube off. Cutting the excess height off will allow all the feed within the tub to flow into the 4-way feeder tube. NOTE: you may not be able to change the height of your feeder tube after you have cut it.
- To cut the tube at the proper height, measure up from the hole you choose to use $3 \frac{3}{4}$ " (see diagram). Mark the tube for cutting. You can wrap a piece of paper around the tube to assure a straight cut. NOTE: which ever mounting hole you choose, measure up $3 \frac{3}{4}$ " to mark for cutting.
- Use a fine blade for a smooth cut of the material.
- After cutting re-install the tube as directed above.

Baffle Installation:

- Insert supplied screw with neoprene washer from outside of the feeder through “V” groove. Install black baffle into the opening of the feed tube and onto screw (see picture below). Secure baffle with supplied wing nut. Baffle can be adjusted for flow of feed.



Installation is now complete and ready for use.

For installation help or questions, please call 877-523-9986. Thank you for purchasing a Redneck Outdoor Products, LLC – ***Made in the USA*** – product.