## **CORNER** Sliding

Corner Shower System Installation Guide for Basic & Hinged Packages


Congratulations on the purchase of your new shower package. This guide will give you the instructions on the installation of your new shower.

Sistine Stone™ showers are ideal for an experienced "DIYer". Please read through this entire installation guide before beginning your installation. If you feel you can not confidently install this shower by yourself hire a licensed contractor, handyman, or professional installer that can do it for you. Installation time may vary depending on your experience, complexity of shower, and "Pre-Install Prep Work" which may include: plumbing and/or drain relocation, bathroom demolition, and squaring up studs and floor.

#### Watch our Installation and Product Videos on americanbathfactory.com/pages/videos

Prior to demolition, scheduling your installer, or building your shower, double check that you have all the parts from the factory. Some applications may require a licensed plumber or contractor. Do not use any product spec sheets to begin installation before receiving product. These spec sheets are for reference only. Use actual product measurements only. The diagrams throughout this guide illustrate a 48" x 36" shower with a hinged door. Depending on the size of the shower purchased, actual parts may vary in size and look from the diagrams shown.

Our goal is to help you achieve a quick and successful shower installation.



Please inspect shipment thoroughly upon receipt and before starting the installation. Missing or damaged hardware and tiles should be reported within 24 hours of receiving this shipment. If you need assistance, call 1-800-454-2284 Mon - Fri from 7:15am - 4 pm (PT)





#### PRE-INSTALLATION TEAR DOWN



8-16 HRS

This shower system is designed to be installed on a level, bare floor. It is necessary for any existing shower to be completely removed. Tear out and remove all old material to expose the 2 x 4 wall studs. Clean up the shower area, removing all dust and old material from the area.

Cold Weather Warning: We recommend not installing your shower below the temperature of 70° F. The shower will be fine in cold weather after installation, but during installation bending and handling shower components in cold weather can cause breakage. Frigid conditions can make some shower components brittle and susceptible to cracking during rough installation handling.



## DRY-FITTING THE PAN

1/2" cement board

silicone bead

pan

floor of pan

metal flange



TIME REQUIRED 1/2 to 1 HR

TIME REQUIRED

It is easier to check alignment of studs and pan without the drain installed into the pan.

Place the pan in the planned position. Check to see that the spacing between the metal pan flange and 2 x 4 studs are flush. Some shimming or sanding of the 2 x 4 studs may be required to flush the studs with the metal pan flange. When screwing in the ½" cement board the metal flange will pull fast to the studs, and will secure the pan in place. (dia. 1)



NOTE: Due to some rough handling during shipping, water test pan before installation to check for any issues.



2 x 4 stud

## OPTIONAL SHAMPOO SHELF INSTALLATION

diagram 1



TIME 1/2 - 1 HR

- 1. The Shampoo Shelf was designed to match your tile size 12" x 24" tiles, the cut-out hole size is 10" x 22".
- 2. There is a 1" lip or frame around the Shampoo Shelf, this will be the water sealed area for the Shampoo Shelf.
- 3. The best way to cut the hole is with a small 5" round diamond blade.
  - See detailed instructions enclosed with Shampoo Shelf
- 4. On the 2 tiles the Shampoo Shelf will be replacing, mark 1" from the outside of the grout line, the cut-out area will be 10" x 22". Cut out the hole for the Shelf. The smaller the hole the better.
- 5. Dry-fit the Shampoo Shelf for alignment of grout lines.
- 6. Using 100% Silicone in-place with a generous bead around the back of the lip, wipe off excess silicone with tissue.

#### **SILICONE**


Each shower will typically require between 12-24 tubes depending on your size and configuration. There are different brands that make RTV silicone (e.g. "DAP", "LOCTITE", or "A.S.I.") or we also recommend the use of GE Silicone II. You can purchase silicone on our website under Shower Accessories.



## 2 x 4 STUDS ALIGNMENT & POSITIONING



Using the pan and wall panels, you will be able to check to make sure your 2 x 4 studs are in the needed position and supported adequately. You will see in (dia. 2) extra 2 x 4 studs are added to the door and glass side thresholds for extra strength. You may need to make adjustments for your a shampoo shelf. When you place the bottom sections of the wall into the shower pan, you can also calculate the needed width and height of areas to keep free of 2 x 4 studs. (See installation instructions for shampoo shelf) This is also when you should add your extra support bracing for those who need them for your other accessories such as the shower valve, grab bars, benches or shelves.

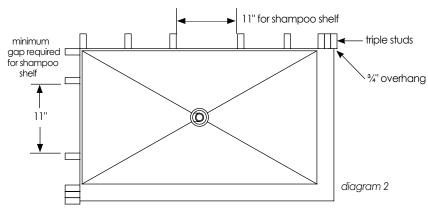


3/4" overhang when using triple studs, no overhang when using double studs (double studs required, triple studs recommended for extra strength)



## **INSTALLING DRAIN** (may be sold separately)



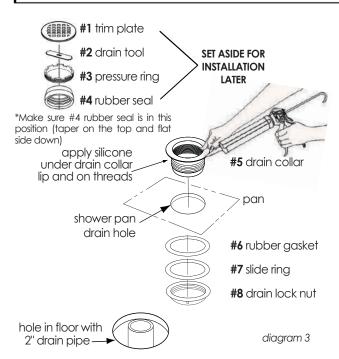


- 1. Locate the drain assembly to install into pan.
- 2. Take drain assembly apart and set parts #1-4 in a safe place for installation later.
- 3. Apply a generous bead of 100% silicone around the shower pan drain hole and around the outside of the drain collar #5, insert the drain collar #5 into the drain hole.
- 4. Apply a generous bead of 100% silicone around the drain collar #5 from the underside of the pan.
- 5. Install the rubber gasket #6 over the drain collar #5, to the underside of the pan, next install the slide ring #7.
- 6. Screw on the drain lock nut #8 and hand tighten. Turn drain lock nut #8 approximately 1/4 turn with the wrench to ensure a water-tight fit. Check for a good seal. DO NOT OVERTIGHTEN.
- 7. Wipe off excess 100% silicone and allow to dry. Follow the manufacturer's directions for application and drying time.

## 5

#### **SETTING PAN**







- 1. Now that the drain is installed onto the pan and has dried, dry fit the pan and your drain for alignment. Check to make sure the 2" drain pipe is in the center of the pan drain hole and that the 2" drain pipe does not extend past the inside threads of the drain collar.
- 2. Make sure the pan and drain fit level to the floor.
- 3. Remove pan and apply 100% Silicone to floor. (dia. 4)
- 4. Carefully lift the shower pan and set into place. Make sure the ABS pipe is still centered.
- 5. Finish installing the drain assembly. Find the rubber seal #4 and slide onto the 2" ABS pipe. (You can use soapy water to help it slide down the pipe) It should seat against the bottom of the drain collar.
- 6. Next drop the pressure ring #3 into the drain collar and use the drain tool #2 and a flat head screwdriver to screw it until it touches the rubber seal. Remove the drain tool after the pressure ring is installed.
- 7. Test and snap that the decorative trim plate #1 sits into position. You may need to adjust the tabs for a good fit. (Remove the decorative trim plate and store in secure area until installation is complete, drain will be grouted when shower is grouted)
- 8. After installing pan, cover with cardboard or drop cloth to protect pan from scuffs.




#### **CEMENT BOARD INSTALLATION**



TIME REQUIRED
1-2 HRS

We recommend the use of ½" thick cement board as your shower backer. This is a common backer for stone and tile. Using this backer will help comply with almost all city codes. A product like WonderBoard® or HardieBacker® may be used if it meets your local codes. Some codes may also require a vapor barrier be installed. We recommend using a 6 mil. plastic water/vapor barrier and should be installed prior to the cement board. To do this, staple plastic so that it hangs 1" above the floor. **DO NOT USE AN ELASTOMERIC WATERPROOFING MEMBRANE ON YOUR CEMENT BOARD (such as RedGard)**. Roofing nails may be used to attach the cement board instead of screws, this prevents the plastic from wrapping around the screws.

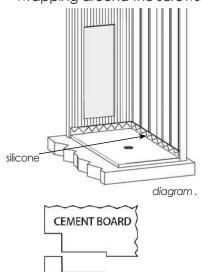

PAN Cut cement board to match

pan threshold

**IMPORTANT**: Use your cement board as an indicator of squareness. The cement board comes in square sheets. If you see gaps or areas where the cement board is not fitting flush, fix the problem by removing the cement board and shimming the board until it's square and flush. If the seams of the cement board are not flush and square, your wall panels will not be square and flush.

- 1. Cut cement board to fit "inside" the metal flange. Sanding or shimming the 2 x 4's at the top rim of the pan may be required to flush the cement board.(dia. 5)
- 2. Place a bead of 100% silicone on the front INSIDE face of the shower pan flange. The bead should be in a zig-zag pattern.
- 3. Place the cement board against the studs and rest it inside the shower pan against the back flange. Attach the cement board to the studs with screws or nails. Do not screw or nail into the shower pan flange.
- 4. Continue installing the remaining cement board.









diagram 9




## **Side Casings**

- Showers without glass and hinged door showers both use (CD) side Casings.
   Glass door showers use the (CD) casings & cap. (dia. 9A) on the door side.
   The panel side of hinged door showers use CP side casings & cap. (dia. 9B)9B)
   Sliding door showers use only CP casings shown in diagram 9c.
   Note: Long plug for door threshold, short plug for channel threshold(dia.9A, 9B)
- 2. To help with the side casing installation, use a level and draw a plumb line from the inside of the pan threshold up to the top of the shower. Do this on both sides. This will be where the side casings and the wall panels meet and will give you a visual reference point when dry-fitting your wall panels.
- 3. Apply 100% silicone, using a circular pattern, to the cement board along the plumb line, approximately 4" wide to the edge of the shower pan. (dia. 10)
- 4. Place the first side casing into position making sure to align the side casing with the vertical plumb line previously drawn on the cement board. Apply pressure to the side casing to bond it to the cement board. The side casing will be flush with the inside of the shower pan threshold.
- 5. Make sure to align any channels. For sliding door.





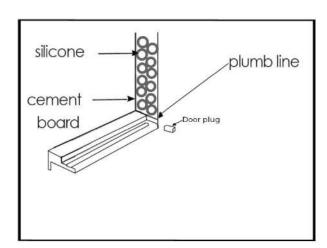

Sliding Door Model

## WALL PANEL/LINER INSTALLATION



## A - Inspecting Wall Panels/Liners

Inspecting panels at this point will give you confidence that the wall panels are straight and square from the factory. When installing wall panels, you may need to make adjustments to the panels to accommodate for unevenness of your existing walls. During the inspection process and/or dry-fitting process, if you have any concerns about the alignment or fit of the wall panels, please call us and we will gladly assist you with your install.

- 1. Find a large flat area to layout and inspect all panels.
- 2. Align all panels and liners to check for straightness. Make sure grout lines are straight and square to each other.
- 3. Sistine Stone wall panels are made to be flexible and may have a slight bow. This condition is normal and wall panels will flatten out when properly installed. If wall panels have been stored improperly or have become excessivly bowed, they can be corrected before installation. (See troubleshooting section on last page for details)

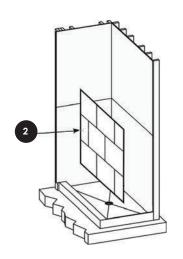


diagram 12

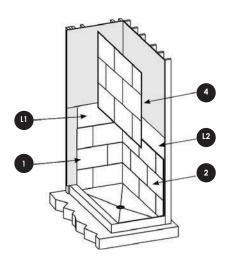


diagram 13

## **B - Dry-fit Wall Panels/Liners**

- 1. Place your first bottom back panel into position. (dia.12) Rest onto the pan floor; you can use spacers between the floor and the panel to make the top of the panel level.
- 2. Place the back liner into position. Make sure the grout lines are aligned, use spacers to make the top level. Inspect the spacing between the wall panels and the side threshold plumb line.
- 3. Place the top panel into position, push the two panels together. Make sure the grout lines are aligned, use spacers to make the top of the panel level. Inspect the spacing between the wall panels and the side threshold plumb line.
- 4. Depending on your cement board alignment, some sanding of the wall panel edges may be required for a tight fit.

(1)

DO NOT force the panels or liners to fit in a tight space. This will cause the panels to bow or curve and can cause them to break. Due to the resilient flex in the panels any bowing will cause the silicone bond to break away from the wall's surface.

- 5. Holding the upper panels and liner in place with another person helps, check the length and overlap alignment. Some fitting may be required.
- 6. Place one of the bottom side panels into position and check for levelness and length.
- 7. Place the side liner into position. (dia. 13)
- 8. Place one of the top side panels into position.
- 9. Repeat steps 6 through 8 for other side of shower.
- 10. Depending on your faucet selection, you may need to mark and cut out holes for your faucet and other accessories (i.e. shampoo shelf) to fit through before you can place the panel into position. Remember \_\_ "measure twice, cut once", you can cut our walls with most cutting tools.

PHELPFUL HINTS: Place wall panels on a flat surface finished side up and put masking or painter's tape where the blade will cut the stone. All cutouts for faucets or accessories should have rounded corners; as sharp edges can cause stress cracks. For best results when drilling, place a scrap piece of wood beneath the hole to ensure a clean cut. In cooler climates, use extra caution when cutting and handling the panels because they won't flex as well when it is cold.

See installation video at americanbathfactory.com/pages/videos

## WALL PANEL/LINER INSTALLATION (continued)


## A - Inspecting Wall Panels/Liners


Inspecting panels at this point to make sure wall panels shipped OK from the factory. When installing wall panels, you may need to make adjustments to the panels to accommodate for unevenness of your existing walls or panels. Sistine Stone wall panels are made to be flexible and may have a slight bow. This condition is normal and wall panels will flatten out when properly installed. If wall panels have been stored improperly or have become excessively bowed, they can be corrected before installation. (See troubleshooting section on last page for details)

## **B** - Wall Configuration

#### Horizontal Single Liner Model

6" Liner

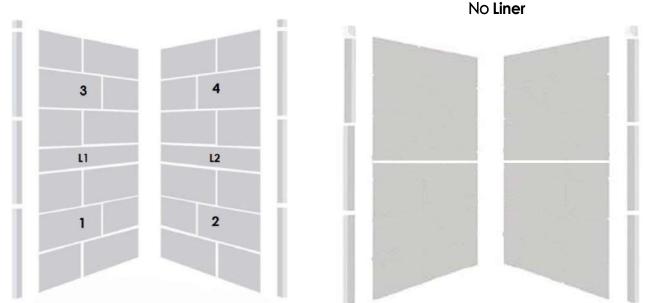

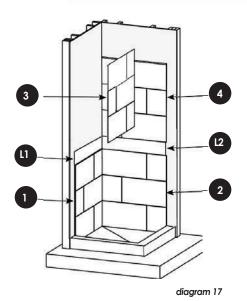

## C - Installing Panels

- 1. Remove all dust and dirt with a clean dry cloth. This will increase the bond to the 100% silicone.
- 2. Start with the bottom panel apply a generous amount of 100% silicone to the cement board and to the back side of the wall panel. Refer to the manufacturer's recommendations for application and drying time.

Braces may be required to keep walls flush


- 3. Press the wall firmly into position. Be sure to use spacers between the bottom panel and the shower pan to ensure panel is level. (diagram 17)
- 4. Install the remaining panels in the following order: 2, 1, L2, L1, 4, 3
- 5. Match the space between the panels with the rest of the grout lines on the panel. Use spacers if necessary to make the walls square and straight.




## **SLIDING GLASS DOOR INSTALLATION**




Our glass is tempered to make for a very strong door, the tempering gives maximum strength from impact on the surface, unfortunately this make the glass very vulnerable to breakage from impacts to the bottom and top edges of the glass panel. Do not rest the top or bottom of glass panels on hard floor or objects, always keep corner pads on glass while handling. Place foam or a soft material under the glass panel when unpacking and setting aside

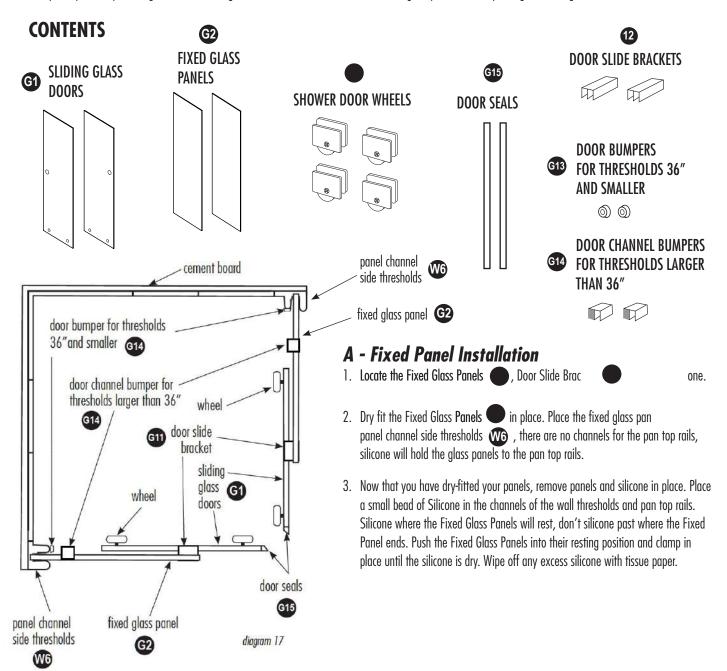

Be careful not to rest the edges of the door on hard surfaces. Tempered glass is very strong and impact resistant but its weakest point is impact on the edges.

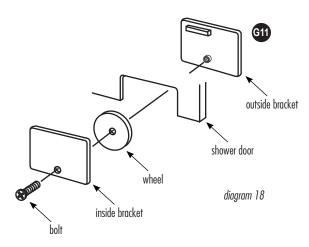

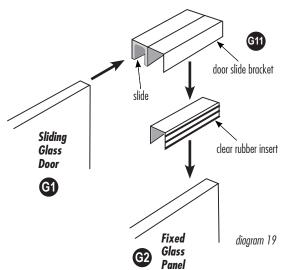

## C - Sliding Glass Door Installation

1. Locate the Wheel Set containing 4 wheel assemblies. G7





- 2. To install the wheel assembly on the sliding glass door, unscrew the bolt from the inside bracket. Place the outside bracket on the outside of the door, and place the inside bracket and wheel into the cutout section of the shower door (diagram 18) Push the bolt through the inside bracket until it screws into the outside bracket. Repeat for the remaining wheels.
- 3. After 30 minutes to an hour the silicon on the fixed glass panel should be secure enough to finish the door assembly. (do not use excessive force on the door until the silicone is fully dried). Have the top door slide bracket handy and ready to install. Carefully place the Door into position, with the wheels resting in to the pan threshold channels facing into the shower.
- 4. To secure the sliding door to the top slide bracket, (diagram 19) Take the clear rubber insert of top bracket and put a pea drop of silicon inside of channel then place on the top end of the Fixed Glass Panel. Next lower the bracket over the clear rubber insert at the same time making sure the glass is going into the guide channel, push down leaving a 1/8" gap between top of the Sliding Glass Door and the slide. (pushing the slide bracket down to far will create to much friction for the door to move easily).
- 5. To install the door wall bumpers for thresholds 36" and smaller, place a drop of silicon onto the bumpers and position on the left and right wall thresholds, in the center of where the door will stop.

To install the door channel bumpers for thresholds larger than 36" attach bumper to the top of the fixed glass panel when door is fully open.

# 11 ACCESSORIES

## **Corner Shelves & Soap Dish**

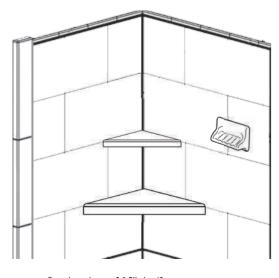



#### **Tools/Supplies:**

Level
 Pencil
 Painter's Tape
 Caulk Gun
 Silicone
 Caulk
 Prill Bit
 Phillip's Head Screwdriver
 Fine Grit Sandpaper

- 1. Thoroughly clean the surface on which the shelf will be adhered.
- 2. Plan height for installation of the shelf. Dry fit the shelf and sand the back edge as needed to allow for a good fit.
- 3. You can install the shelf with silicone or the screws included:
  - a) **Silicone Installation:** Apply silicone to the back edge of shelf and press firmly in place applying even pressure. You may use painter's tape to help hold it in place while it dries. Allow to dry for 24 hours.
  - b) **Screw Installation:** First, place your shelf in desired location. Use a pencil to mark the mounting holes. Next, drill out the pilot holes. Insert the anchor through pilot holes, apply silicone to back edge of shelf and then screw shelf to wall.
- 4. You can install the soap dish with silicone:
  - a. **Silicone Installation:** Apply silicone to the back edge of shelf and press firmly in place applying even pressure. You may use painter's tape to help hold it in place while it dries. Allow to dry for 24 hours.
- 5. Once silicone has fully cured, apply a bead of silicone caulk around the perimeter of the shelf to seal out water. Use a wet finger to smooth the caulk and then clean off excess with a damp sponge.
- 6. Allow to fully dry before use.

#### **HELPFUL HINTS:**

- > When figuring out the "proper" height for your shelf, it's a good idea to consider everyone that will use the shower.
- > Periodically check the silicone and caulk for any wear or deterioration and correct as necessary.

Your American Bath Factory shower has a non-porous surface, which makes it easy to clean. Decorative lines in the shower wall panels and Sistine Stone floor accents (e.g. 4x4 Diamond) can be grouted if preferred, but it is not necessary. Showers with any glass tile accents must be grouted. Grout must contain an ACRYLIC ADDITIVE to ensure proper bonding to the tiles. We suggest grouting in every union joint of shower components. These are two recommendations we have for grouting the shower:

- 1. Traditional powered grout that is non-sanded and instead of water we recommend mixing with an acrylic additive to aid in adhesion
- 2. You can also use a pre-mixed non-sanded grout this comes ready to apply, no mixing necessary this normally comes in caulking tubes (no additive needed)

Do not let the grout dry completely onto the shower before removing and cleaning off the excess grout. If grout is allowed to dry onto the shower components, it will likely be difficult if not impossible to remove without damaging the shower's surface. **Note: Grout is not covered by ABF Warranty.** 

#### **CARE & MAINTENANCE OF YOUR SHOWER SYSTEM**

**SISTINE STONE is easy to clean using dish soap.** Dish soap is inexpensive and great to dissolve body oils as well will not leave a buildup of soap. If you have hard water spotting you may need something stronger like Comet or another non-scratch cleanser. "Lightly" scrub the stained area in a circular motion to avoid discoloration. The stone is naturally waterproof and will not absorb spills or soil, simply wipe away with a damp sponge.

Periodic cleaning with a sponge and warm, soapy water will remove any build up of dust or grime. Periodically check the grout and silicone for any cracks and repair as needed.

### SHOWER SYSTEM TROUBLESHOOTING

**Correcting Bowed Wall Panels** Sistine Stone Wall Panels are made to be flexible and may have a slight bow. This condition is normal and the panels will flatten when properly installed. If the panels have been stored improperly or have become excessively bowed, follow instructions below. Using a hair dryer or heating pad/blanket, warm up the backside of the panel in the most bowed area. Once the panel becomes malleable, lay panel on a flat surface and apply weight until cool and flat.

**Cracked Tile** As with any tile project, a tile can become damaged. Simply cut out the damaged tile, silicone a replacement tile in place, and grout.

**Cracked Wall Panel Seam** If your wall panel developed a crack in a grout line, simply grout over the cracked seam when it is installed. The grout will correct the problem, you will not be able to tell the crack was ever there.

**Scratches & Blemishes** Can be removed by wet-sanding the tile surface. Make sure tile surface and sandpaper are wet, and sand tiles until scratches and blemishes are removed.

**Door Will Not Stay Closed** Adjust height of door sweep to provide proper tension and seal.

**Door Leaking** The shower doors are designed not to leak under normal usage when installed properly, and the water flow is not pointed directly at the vinyl seals, hinges or opening.

