Halcyon AMH40 D

halcyon

undercounter

Halcyon **AMH40 D** Features

- 1 year warranty
- Drain pump as standard
- Accurate detergent and rinse aid peristaltic dosing pumps
- Dosing set up by fascia controls
- Easy clean parallel wash and rinse arm assembly
- Optional surface scrap tray filters
- Large three button control



Two 390 x 390mm open cup/glass racks supplied as standard – capable of holding 16 pint glasses.

Additional racks can be purchased at point of order:

Q902303B



Gravity drain version available: **AMH40**

For additional information contact our Sales Team on

T: 0345 130 8070 E: sales@maidaid-halcyon.co.uk or visit www.maidaid.co.uk

Halcyon AMH40 D

undercounter glasswasher





Technical Data


| Dimensions (W x D x H) | mm | 440 x 540 x 670 + Feet |
|--------------------------|---------|---------------------------|
| Feet height | mm | 10-20 |
| Rack size | mm | 390 x 390 |
| Maximum useable height | mm | 300 |
| Door opening | mm | 320 |
| Theoretical productivity | Racks/h | 30 |
| Effective productivity | Racks/h | 24* |

| Wash tank element | kW | 1.4 |
|-------------------|-------|------|
| Boiler element | kW | 2.6 |
| Wash pump | kW | 0.18 |
| Tank capacity | L | 8 |
| Noise emission | dB(A) | ≤ 70 |

Packaging Specs

| Gross weight | Kg | 35 |
|------------------------------|----|-----------------|
| Cubic volume | m³ | 0.25 |
| Dim. $(W \times D \times H)$ | mm | 520 x 630 x 830 |

Installation Diagram - All services must be within 1 meter

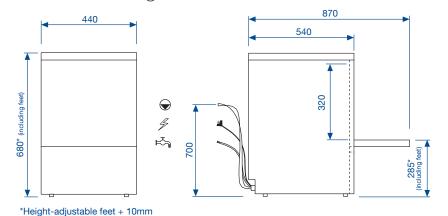

Power Supply

| Installed power | AMP | kW | |
|------------------|-----|-----|--|
| 230V - 50Hz - 1N | 13* | 2.8 | |

^{*}Supplied with 13A moulded plug and lead





Water Connection

| Inlet water pressure | Bar | 2 to 4 |
|----------------------|-------|-------------------|
| Flow rate L/Min | L/Min | 6 |
| Water inlet temp | °C | 10 to 50 |
| Water connection | BSP | 3/4" |
| Waste connection | Ø | Int 16.8/ext 21.6 |

Cycle Information

| Number of standard cycles | | 1 |
|-----------------------------|-----|---------|
| Standard cycles times | Sec | 120 |
| Special cycle | | N/A |
| Self-cleaning cycle | | Partial |
| Water consumption per cycle | L | 2.2 |
| Wash temperature | °C | 60 |
| Rinse temperature | °C | 65 |

For additional information contact our Sales Team on

T: 0345 130 8070 E: sales@maidaid-halcyon.co.uk or visit www.maidaid.co.uk

^{*}Allowing 30 seconds for reloading Cycle times may vary depending on local conditions/services