

LMP-1202G-SFP Series

Features

12-Port Industrial Gigabit PoE+ Managed Ethernet Switches, w/8*10/100/1000Tx (30W/Port), 2*10/100/100Tx, 2*100/1000Fx, 48~55VDC Power Input




- ▶ Supports 8*10/100/1000Tx IEEE 802.3at/af Compliant with 30W/Port, 2*10/100/100Tx & 4*100/1000Fx SFP Fiber Slots
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ PoE Ping Alarm Function for PoE Ports Power Recycle
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Port Lock Function for Unauthorized Access Based on MAC Address Blocking
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Operating Temps.– STD: -10~70°C, EOT: -40~75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LMP-1202G-SFP series is a 12-port industrial PoE+ managed Ethernet switch is embedded with 8*10/100/1000Tx Ethernet ports that support IEEE802.3at/af for a maximum of 30W/port, 2*10/100/100Tx and 2*100/1000Fx SFP fiber ports that support either Single or Multi-Mode modules. The LMP-1202G-SFP series is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, port lock, RMON, Modbus TCP, and 802.1X/ HTTPS/ SSH/ SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMP-1202G-SFP series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

DIMENSIONS

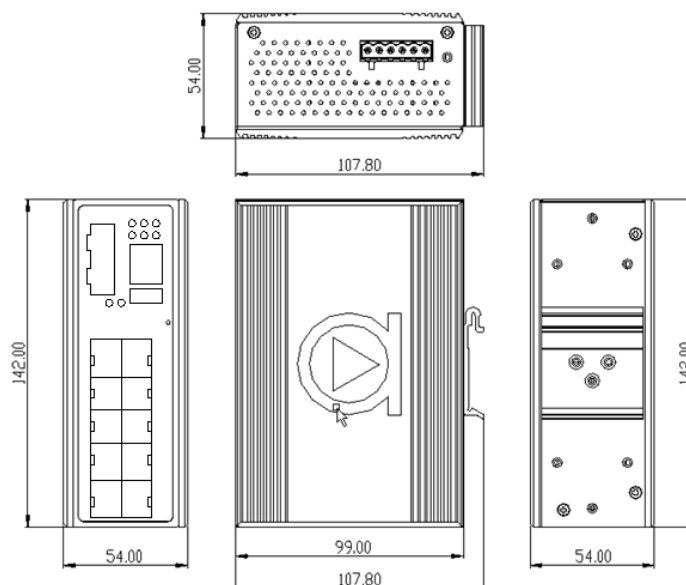

SPECIFICATIONS

Technology

IEEE 802.3 10Tx Ethernet
 IEEE 802.3u 100Tx Fast Ethernet
 IEEE 802.3ab 1000Tx Gigabit Ethernet
 IEEE 802.3z Gigabit Fiber
 IEEE 802.3x Flow Control for Full Duplex
 IEEE 802.3ad for Port Trunk with LACP
 IEEE 802.3at/af PoE (Power-over-Ethernet)
 IEEE 802.1d STP (Spanning Tree Protocol)
 IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)
 IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)
 ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol
 IEEE 802.1Q for VLAN Tagging
 IEEE 802.1x for Network Authentication
 IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization

Standards

Switch Architecture	Back-Plane (Switching Fabric): 24.0Gbps
Protocol	IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6
Data Process	Store and forward
Transfer Rate	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet 1,488,000pps for Gigabit Ethernet
Packet Buffer	4 Mbits
MAC Table	8K
Jumbo Frame	9.6K
Flow Control	IEEE 802.3x for full duplex mode, back pressure for half duplex mode
VLAN Group	0 ~ 4094
IGMP Group	Up to 256 Groups

Port Interface

Ethernet RJ45 Port	8*10/100/1000Tx (PSE: 30W/Port), 2*10/100/1000Tx auto negotiation speed, Full/Half duplex mode, and auto MDI connection
Fiber Port	2*100/1000 Dual Rate SFP Slots
Wavelength	Dependent on Fiber type and Distance
PoE Port Pin Assignment	V+, V+, V-, V-, for pin 1, 2, 3, 6 (Endspan, MDI-X Alternative A)
RS232 Serial Console	1*RS232 in RJ45 connector with console cable, 115.2bps, 8,N,1
Configuration Backup	1*USB 2.0

Protection

Overload Current	Present
Power Reverse Polarity	Present (the unit will not be on, if power reverse)
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)

Mechanical Characteristics

LED Indicator	Per Unit: Power 1 & 2 (Green), Fault (Red) PoE: Feeding Power (Green)
Housing	Metal IP30 rated
Dimensions	54 x 142 x 99 mm
Weight	Unit: 2.5 lbs; Shipping: 3.0 lbs
Mounting	DIN-Rail; Wall-mount (Optional)
Power Requirement	
Input Voltage	48~55VDC Redundant Input
Power Connection	1 removable 6-contact terminal block
PoE Power Output	25W @ 48VDC (per PoE port); 30W @ 51~55VDC (per PoE port)
Power Consumption	15 Watts (no PD included); 255 Watts (Fully Loaded)
Environmental Limits	
Operating Temperature	STD: -10° to 70°C EOT: -40° to 75°C
Storage Temperature	-40°C ~ 85°C
Ambient Relative Humidity	5 to 95%, (Non-Condensing)
Regulatory Approvals	
EMI	FCC Class A
EMS	EN6100-4-2,3,4,5,6,8 EN6100-6-2,4
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE, UL-61010-2-201(Pending)
Warranty	5 Years

ORDERING INFO

LMP-1202G-SFP 12-Port Industrial PoE+ Managed Ethernet Switch with 8*10/100/1000Tx(30W/ Port), 2*10/100/100Tx (Non-PoE) + 2*100/1000Fx SFP Slots, 48VDC Power Input

LMP-1202G-SFP-T 12-Port Industrial PoE+ Managed Ethernet Switch with 8*10/100/1000Tx (30W/ Port), 2*10/100/100Tx (Non-PoE) + 2*100/1000Fx SFP Slots, 48VDC Power Input; EOT: -40° to 75°C

Optional Accessories

MDR-100-48 100W Industrial Din Rail Miniature Power Supply (48VDC)

DR-120-48 120W Industrial Din Rail Power Supply (48VDC)

SDR-240-48 240W Industrial Din Rail Power Supply (48VDC)

SFP-M-T 1 Gigabit Fiber SFP Transceiver, Multi-Mode 550M / LC / 850nm, -40°C~85°C

SFP-S10-T 1 Gigabit Fiber SFP Transceiver, Single Mode 10KM / LC / 1310nm, -40°C~85°C

DIN-RACK-2U Din-Rail to 19" Rack Mount Adapter for all Din-Rail Mountable Products, 2U Height