With its highly pitched roofline, the modern lighting design of the Peak outdoor wall sconce light is reminiscent of a clapboard shingle. The angular LED downlight gently grazes the surface of the extended back plate. Cleverly hidden hardware ensures a clean look. Offered with warm color dimming and available in two modern finishes.

Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

SPECIFICATIONS

DELIVERED LUMENS	391.1
WATTS	14.5
VOLTAGE	120V
DIMMING	ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
ССТ	Warm Color DImming (3000K - 2200K)
CRI	90
COLOR BINNING	3-Step
BUG RATING	N/A
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 hours
WARRANTY*	5 years
WEIGHT	3.5 lbs.



PEAK shown in bronze




PEAK shown in silver

* Visit techlighting.com for specific warranty limitations and details.

ORDERING INFORMATION

PRODUCT	FINISH	LAMP
700WSPEAK	Z BRONZE	-LEDWD LED 90CRI, 3000K-2200K, 120V




Peak



PEAK

Total Lumen Output:	391.1
Total Power:	14.5
Luminaire Efficacy:	20
Color Temp:	Warm Color Dimming (3000K - 2200K)
CRI:	90
BUG Rating:	N/A

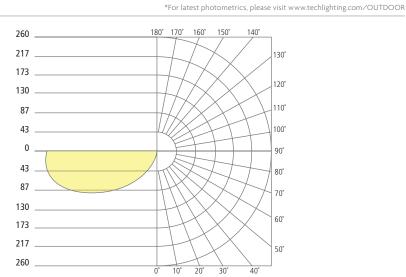

PROJECT INFO

FIXTURE TYPE & QUANTITY

(I) us

JOB NAME & INFO

NOTES

TECH LIGHTING

VISUAL COMFORT & CO.

7400 Linder Avenue, Skokie, Illinois 60077 T 847.410.4400