

Day-Brite

CFI

by Signify

Linear

FluxStream EZ LED wraparound

4', 4000 lumens



Project: _____

Location: _____

Cat.No: _____

Type: _____

Lamps: _____ Qty: _____

Notes: _____

Day-Brite / CFI FluxStream EZ LED wraparound is a high performing luminaire delivering smooth diffused light ideal for light industrial, commercial and residential applications with unparalleled energy efficiency.

Ordering guide

Example: **FSWEZ440L840-UNV**

Series	Length (nominal)	Lumens ¹ (nominal)	Color temp. (K)	Voltage	Options
FSWEZ	4	40L	-	UNV -	
FSWEZ FluxStream wraparound EZ	4 4' length	40L 4000 lumens	830 80 CRI, 3000K 835 80 CRI, 3500K 840 80 CRI, 4000K	UNV Universal voltage 120-277	EMLED Factory wired Bodine BSL310LP integral emergency pack, Nominal 1100 lm LSXR10 120-347V motion sensor, factory installed on end cap

1. Nominal delivered lumens at 25°C ambient.

Accessories (order separately)

- **FSWD4L** - FluxStream Wraparound 4' diffuse replacement lens
- **LSXR10** - Low bay PIR motion sensor, 120-277V
- **FSTH** - Sliding hanger bracket (set of 2)
- **FSWJ** - Continuous row joiner (one per joint required)
- (See last page for details and more options)

General notes

Many luminaire components, such as reflectors, refractors, lenses, sockets, lampholders, and LEDs are made from various types of plastics which can be adversely affected by airborne contaminants. If sulfur based chemicals, petroleum based products, cleaning solutions, or other contaminants are expected in the intended area of use, consult factory for compatibility.



FSWEZ FluxStream EZ LED wraparound

4', 4000 lumens

Features

- Compact design for installation in tight spaces
- Frosted acrylic diffuser provides wide light distribution and superior glare control
- Injection molded lens retainer provides positive diffuser retention and easy tool-free access to LED boards and driver
- Convenient nominal 4' length accommodates many field applications
- Up to 50,000 hour predicted L70 LED lumen maintenance provides long service life to reduce maintenance costs
- Can be surface mounted on ceilings or walls, or suspended via chain, pendants or cables
- Wall mountable - ADA compliant
- Ideal for cold applications (-20°C to 25°C)
- FSWJ accessory required for continuous row mounting, one FSWJ at each joint
- 7/8" knock out provided at each end and on base of luminaire. Note: Center knockout is covered and not useable in 4' version with EMLED option.
- Enclosed lens minimizes penetration of dust, insects, and other debris into the lamp compartment
- 5 year manufacturer's limited warranty. Visit www.philips.com/warranties for complete warranty information

Finish

- Baked white acrylic matte high reflectance paint finish

Shielding

- Contoured frosted acrylic lens

Electrical

- LED boards and drivers are RoHS (Restriction of Hazardous Substances) compliant. Total system life rated at 50,000 hours. Predicted L70 lifetime based on LED manufacturer's supplied LM-80 data and in-situ laboratory testing. (<http://www.designlights.org/QPL>)



Materials

- Heavy gauge cold rolled steel housing and LED pan. Polycarbonate injection molded end caps

Labels

- cETLus listed
- Suitable for damp locations

Dimensions

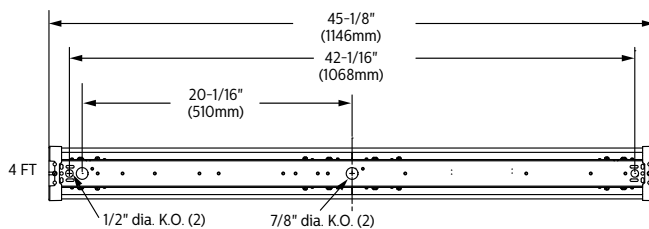

FSWEZ FluxStream EZ LED wraparound

4', 4000 lumens

Photometry

4' FluxStream EZ wraparound LED, 4000 nominal delivered lumens

LER - 104

<p>Catalog No. FSWEZ440L840-UNV</p> <p>Test No. 37443</p> <p>S/MH 1.3</p> <p>Lamp Type LED</p> <p>Lumens 3325</p> <p>Input Watts 32</p> <p>Comparative yearly lighting energy cost per 1000 lumens – \$2.31 based on 3000 hrs. and \$.08 pwr KWH.</p> <p>The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.</p> <p>Photometric values based on test performed in compliance with LM-79.</p>	<p>Candlepower</p> <table border="1"> <thead> <tr> <th>Angle</th> <th>End</th> <th>45</th> <th>Cross</th> <th>Back-45</th> </tr> </thead> <tbody> <tr><td>0</td><td>906</td><td>906</td><td>906</td><td>906</td></tr> <tr><td>5</td><td>892</td><td>903</td><td>909</td><td>903</td></tr> <tr><td>15</td><td>862</td><td>883</td><td>895</td><td>883</td></tr> <tr><td>25</td><td>799</td><td>833</td><td>852</td><td>833</td></tr> <tr><td>35</td><td>707</td><td>756</td><td>780</td><td>756</td></tr> <tr><td>45</td><td>593</td><td>661</td><td>689</td><td>661</td></tr> <tr><td>55</td><td>429</td><td>543</td><td>577</td><td>543</td></tr> <tr><td>65</td><td>291</td><td>386</td><td>439</td><td>386</td></tr> <tr><td>75</td><td>153</td><td>261</td><td>303</td><td>261</td></tr> <tr><td>85</td><td>36</td><td>147</td><td>198</td><td>147</td></tr> </tbody> </table>	Angle	End	45	Cross	Back-45	0	906	906	906	906	5	892	903	909	903	15	862	883	895	883	25	799	833	852	833	35	707	756	780	756	45	593	661	689	661	55	429	543	577	543	65	291	386	439	386	75	153	261	303	261	85	36	147	198	147	<p>Light Distribution</p> <table border="1"> <thead> <tr> <th>Degrees</th> <th>Lumens</th> <th>% Luminaire</th> </tr> </thead> <tbody> <tr><td>0-30</td><td>718</td><td>21.5</td></tr> <tr><td>0-40</td><td>1189</td><td>35.7</td></tr> <tr><td>0-60</td><td>2165</td><td>64.9</td></tr> <tr><td>0-90</td><td>2956</td><td>88.7</td></tr> <tr><td>0-180</td><td>3333</td><td>100</td></tr> </tbody> </table>	Degrees	Lumens	% Luminaire	0-30	718	21.5	0-40	1189	35.7	0-60	2165	64.9	0-90	2956	88.7	0-180	3333	100	<p>Average Luminance</p> <table border="1"> <thead> <tr> <th>Zone</th> <th>End</th> <th>45°</th> <th>Cross</th> </tr> </thead> <tbody> <tr><td>45</td><td>16190</td><td>7464</td><td>6347</td></tr> <tr><td>55</td><td>13966</td><td>5970</td><td>5063</td></tr> <tr><td>65</td><td>12209</td><td>4261</td><td>3785</td></tr> <tr><td>75</td><td>9391</td><td>2989</td><td>2649</td></tr> <tr><td>85</td><td>4390</td><td>1800</td><td>1808</td></tr> </tbody> </table>	Zone	End	45°	Cross	45	16190	7464	6347	55	13966	5970	5063	65	12209	4261	3785	75	9391	2989	2649	85	4390	1800	1808																																																																																					
Angle	End	45	Cross	Back-45																																																																																																																																																																																					
0	906	906	906	906																																																																																																																																																																																					
5	892	903	909	903																																																																																																																																																																																					
15	862	883	895	883																																																																																																																																																																																					
25	799	833	852	833																																																																																																																																																																																					
35	707	756	780	756																																																																																																																																																																																					
45	593	661	689	661																																																																																																																																																																																					
55	429	543	577	543																																																																																																																																																																																					
65	291	386	439	386																																																																																																																																																																																					
75	153	261	303	261																																																																																																																																																																																					
85	36	147	198	147																																																																																																																																																																																					
Degrees	Lumens	% Luminaire																																																																																																																																																																																							
0-30	718	21.5																																																																																																																																																																																							
0-40	1189	35.7																																																																																																																																																																																							
0-60	2165	64.9																																																																																																																																																																																							
0-90	2956	88.7																																																																																																																																																																																							
0-180	3333	100																																																																																																																																																																																							
Zone	End	45°	Cross																																																																																																																																																																																						
45	16190	7464	6347																																																																																																																																																																																						
55	13966	5970	5063																																																																																																																																																																																						
65	12209	4261	3785																																																																																																																																																																																						
75	9391	2989	2649																																																																																																																																																																																						
85	4390	1800	1808																																																																																																																																																																																						
<p>Coefficients of Utilization</p> <p>EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)</p> <table border="1"> <thead> <tr> <th>pfc =</th> <th colspan="3">20</th> <th colspan="3">80</th> <th colspan="3">70</th> <th colspan="3">50</th> </tr> <tr> <th>Ceil</th> <th colspan="3"></th> <th colspan="3"></th> <th colspan="3"></th> <th colspan="3"></th> </tr> <tr> <th>Wall</th> <th>70</th> <th>50</th> <th>30</th> <th>70</th> <th>50</th> <th>30</th> <th>50</th> <th>30</th> <th>70</th> <th>50</th> <th>30</th> </tr> <tr> <th>RCR</th> <th colspan="11"></th> </tr> </thead> <tbody> <tr><td>0</td><td>115</td><td>115</td><td>115</td><td>112</td><td>112</td><td>112</td><td>105</td><td>105</td><td>105</td><td>105</td><td>105</td></tr> <tr><td>1</td><td>105</td><td>98</td><td>94</td><td>101</td><td>95</td><td>92</td><td>90</td><td>85</td><td>85</td><td>85</td><td>85</td></tr> <tr><td>2</td><td>94</td><td>85</td><td>79</td><td>91</td><td>82</td><td>76</td><td>78</td><td>71</td><td>71</td><td>71</td><td>71</td></tr> <tr><td>3</td><td>85</td><td>75</td><td>66</td><td>81</td><td>71</td><td>65</td><td>68</td><td>60</td><td>60</td><td>60</td><td>60</td></tr> <tr><td>4</td><td>78</td><td>66</td><td>56</td><td>75</td><td>64</td><td>56</td><td>59</td><td>53</td><td>53</td><td>53</td><td>53</td></tr> <tr><td>5</td><td>71</td><td>58</td><td>50</td><td>68</td><td>56</td><td>47</td><td>54</td><td>46</td><td>46</td><td>46</td><td>46</td></tr> <tr><td>6</td><td>66</td><td>53</td><td>44</td><td>64</td><td>51</td><td>42</td><td>47</td><td>40</td><td>40</td><td>40</td><td>40</td></tr> <tr><td>7</td><td>60</td><td>47</td><td>39</td><td>58</td><td>46</td><td>38</td><td>44</td><td>35</td><td>35</td><td>35</td><td>35</td></tr> <tr><td>8</td><td>56</td><td>42</td><td>34</td><td>55</td><td>41</td><td>34</td><td>40</td><td>33</td><td>33</td><td>33</td><td>33</td></tr> <tr><td>9</td><td>53</td><td>40</td><td>30</td><td>51</td><td>39</td><td>30</td><td>36</td><td>29</td><td>29</td><td>29</td><td>29</td></tr> <tr><td>10</td><td>50</td><td>36</td><td>28</td><td>47</td><td>35</td><td>28</td><td>34</td><td>27</td><td>27</td><td>27</td><td>27</td></tr> </tbody> </table>				pfc =	20			80			70			50			Ceil													Wall	70	50	30	70	50	30	50	30	70	50	30	RCR												0	115	115	115	112	112	112	105	105	105	105	105	1	105	98	94	101	95	92	90	85	85	85	85	2	94	85	79	91	82	76	78	71	71	71	71	3	85	75	66	81	71	65	68	60	60	60	60	4	78	66	56	75	64	56	59	53	53	53	53	5	71	58	50	68	56	47	54	46	46	46	46	6	66	53	44	64	51	42	47	40	40	40	40	7	60	47	39	58	46	38	44	35	35	35	35	8	56	42	34	55	41	34	40	33	33	33	33	9	53	40	30	51	39	30	36	29	29	29	29	10	50	36	28	47	35	28	34	27	27	27	27
pfc =	20			80			70			50																																																																																																																																																																															
Ceil																																																																																																																																																																																									
Wall	70	50	30	70	50	30	50	30	70	50	30																																																																																																																																																																														
RCR																																																																																																																																																																																									
0	115	115	115	112	112	112	105	105	105	105	105																																																																																																																																																																														
1	105	98	94	101	95	92	90	85	85	85	85																																																																																																																																																																														
2	94	85	79	91	82	76	78	71	71	71	71																																																																																																																																																																														
3	85	75	66	81	71	65	68	60	60	60	60																																																																																																																																																																														
4	78	66	56	75	64	56	59	53	53	53	53																																																																																																																																																																														
5	71	58	50	68	56	47	54	46	46	46	46																																																																																																																																																																														
6	66	53	44	64	51	42	47	40	40	40	40																																																																																																																																																																														
7	60	47	39	58	46	38	44	35	35	35	35																																																																																																																																																																														
8	56	42	34	55	41	34	40	33	33	33	33																																																																																																																																																																														
9	53	40	30	51	39	30	36	29	29	29	29																																																																																																																																																																														
10	50	36	28	47	35	28	34	27	27	27	27																																																																																																																																																																														

Accessories



Accessory Catalog Code	Description
FSTH	Sliding hanger bracket (pair)
SV5F12	12" Stem and canopy kit
SV5F18	18" Stem and canopy kit
SV5F24	24" Stem and canopy kit
SV5F36	36" Stem and canopy kit
SV5F48	48" Stem and canopy kit
FKR-126	Chain hanger set (pair)
DACHxx	Adjustable cable hanger kit (single)
DACHxx-1-SC	Adjustable cable hanger kit with white straight 18/3 cord (single)
DACHxx-1-CC	Adjustable cable hanger kit with white coiled 18/3 cord (single)
DACHxx-2-SC	Adjustable cable hanger kit with white straight 18/4 cord (single)
DACHxx-2-CC	Adjustable cable hanger kit with white coiled 18/4 cord (single)
DACHxx-1D-SC	Adjustable cable hanger kit with white straight 18/5 cord with dimming leads (single)
FSWJ	External continuous row joiner (one per joint).
LSXR10	Low bay pir motion sensor (120-277v)
LSXR10ADC	Low bay pir motion sensor with photocell and hi/lo trim dimming (120-277v)
FSWD4L	4' Diffuse replacement lens

White stem and canopy kit, 1/4" trade size (1/2" O.D.) locknuts included. Works with 9/16" k.O. on base of housing.

Includes two 5' heavy duty link chains with "V" hooks. Attaches to base of housing.

Works with 1/4" hole on base of housing or FSTH hanger bracket.

xx=cable length in inches, enter 48" to 180" lengths in 12" increments

FSJW accessory required for continuous row mounting

