


Hanging Lite High Power RGBW PURE LED

SPECIFICATIONS




| | |
|----------------------------|--|
| LED Chip | LED Engin Plug and Play field replaceable LED board |
| Luminaire Output | 1000 total Lumens @250mA (20 Watts) with all colours on, Delivered from luminaire with unobstructed beam |
| Lumens Per Watt | 54 Lumens minimum @ 20 watts, delivered from luminaire with unobstructed beam |
| CRI (6500K) | 75CRI White - 6500K |
| Colour Temperatures | 6500K White + Red, Blue, Green |
| Beam Angles | 15, 30, 40, 70 |
| Ingress Protection | IP66 |
| Warranty | Electronics = 5 years Body Aluminium = 5 years |
| Standards | AS/NZS 61046 cUL 1838, 2108 CSA C22.2 No. 250.7, No. 250.0-08 CE |

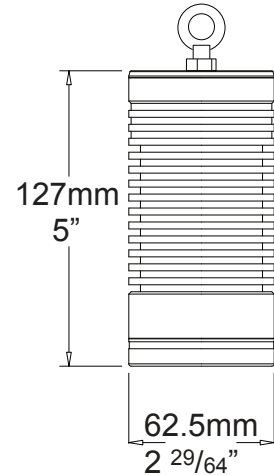

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. HL/HPRGBW

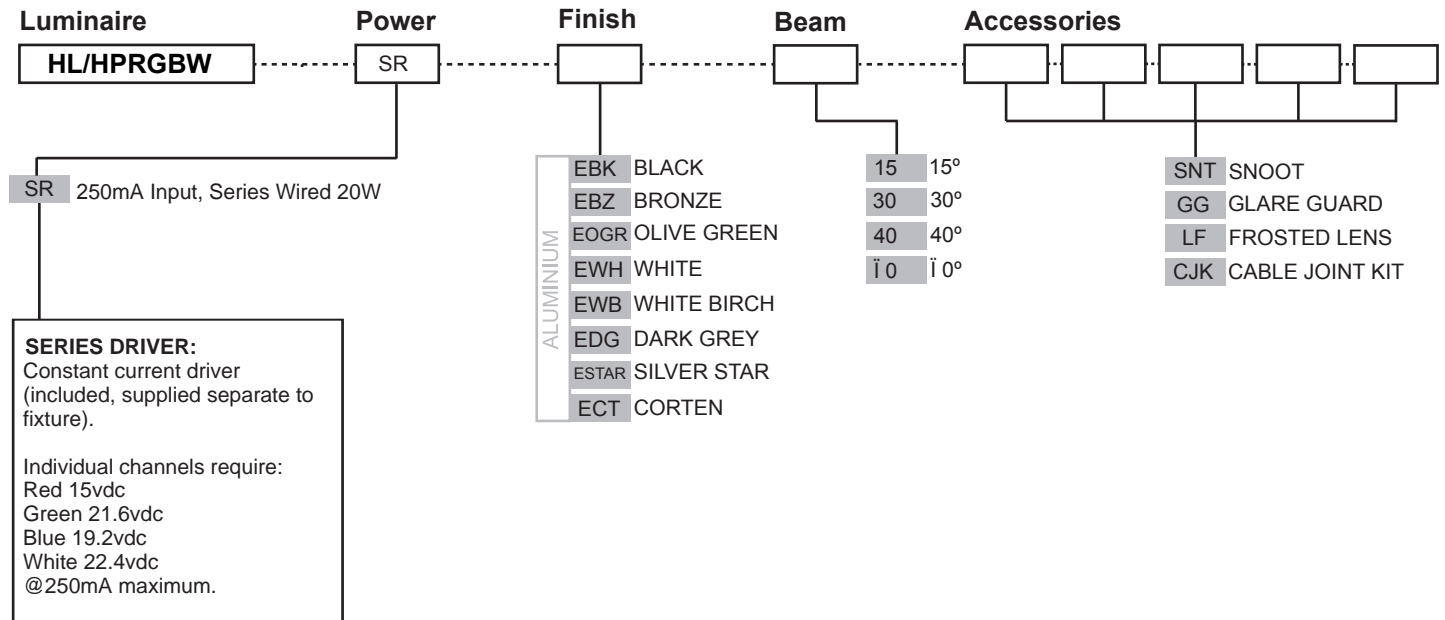

ADDITIONAL COMMENTS:

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Aluminium:

Body: high corrosion resistant 63.5mm solid aluminium tube with chromate substrate and high UV resistant polyester "E" powder coat.

Colours:

Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

Lens:

10mm (3/8") Extra clear, low iron, shatter resistant glass.

Lifetime warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F)


Mounting:

Hung via the provided stainless steel cable.

Luminaire Weight:

Low voltage:
Alum: 0.870 (1lb 15oz)


ACCESSORIES

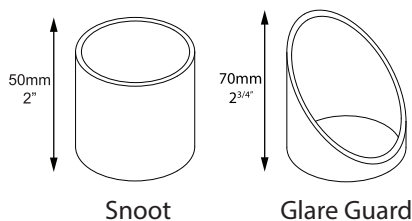

BEAM ANGLES

High efficiency PMMA TIR lenses. Field replaceable



IES files available for download: hunzalighting.com/downloads

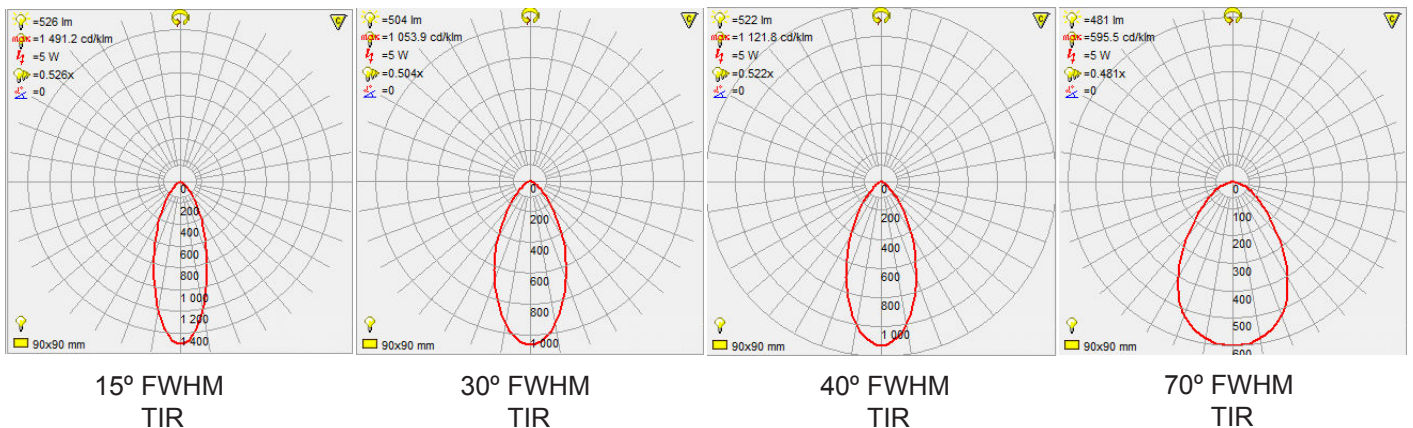

WIRING GUIDE

CONSTANT CURRENT - SERIES WIRED

Available for download: hunzalighting.com/downloads

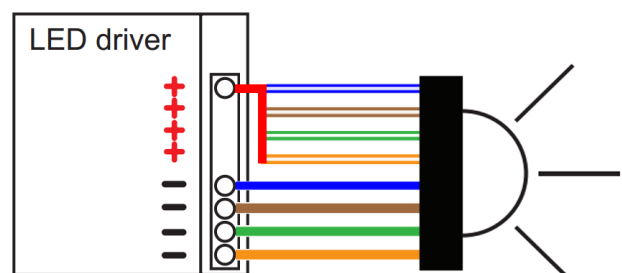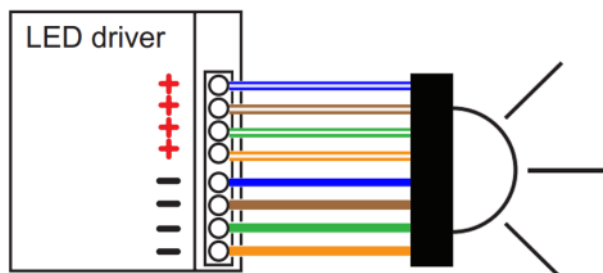

Specifications may change without notification

Sept 2020