



Innovation you can rely on™



Roadway Lighting Redefined

A New Performance Standard in LED Roadway Lighting

With industry-leading, patented optics in a scalable package, the Navion LED area, site and roadway luminaire delivers state-of-the-art optical control, low maintenance costs, rugged construction and modern styling. The Navion luminaire is designed for years of operation with minimal service requirements. Its superior performance and configurability provide uniform, glare-free, energy-efficient light for commercial, industrial and municipal parking lots as well as roadway applications.

Long Life with Low Maintenance Costs

Superior illumination, low maintenance, long life and low cost of ownership are critical factors when lighting roads and public spaces. Ideal for retrofit and new construction applications, the Navion fixture can be tailored to meet your most important needs without compromising on specification features. The five housing configurations of the Navion luminaire allow scalability from 2,582 to 33,732 delivered lumens. The 4000K/70 CRI is standard, with 6000K/70 CRI and 3000K/70 CRI options available. LED components are IP66 rated and the fixture is wet location listed, with an IP66 housing option available.

Customer-Focused Design

Designed to meet the full range of outdoor lighting challenges in area, site and roadway applications, the Navion luminaire is available with a wide array of optics and specification performance features. A tool-less, removable power tray door and quick electrical disconnects make installation and maintenance easy. The 10kV common surge (line-to-ground) and differential surge (line-to-line) protection is standard. Four-bolt mounting with cast-in leveling steps ensures simple installation, while a super TGIC polyester powder-coat finish provides years of worry-free ownership.

Design Excellence

Stepping Up to the Challenge

The Navion luminaire is designed to provide superior optical performance in a package that is easy to install and maintain. With HID equivalents from 70W HPS up to 750W Pulse Start MH, along with the industry-leading AccuLED Optics™ system from Cooper Lighting Solutions, the Navion fixture is designed to meet the toughest lighting challenges.

Construction

- Tool-less entry with hinged, removable power door for easy maintenance
- 3G vibration rated
- IP66-Rated LED Light Squares
- Wet location-rated housing (IP66 housing optional)
- Extruded aluminum heat sink scaled to lumen package
- Rugged, die-cast aluminum housing

Electrical


- Operates in -40°C to 40°C ambient temperatures (optional 50°C high ambient configuration)
- 10kV common surge (line-to-ground) and differential surge (line-to-line) protector
- >L90, 60,000 hours at 40°C, compliant with IESNA TM-21
- LED driver is mounted directly to removable door for optimal heat sinking
- 120-277V 50/60Hz, 347V 60Hz or 480V 60Hz operation
- Quick disconnects for tool-less removal of power door

Controls

- Standard with 0-10V dimming driver(s)
- Optional occupancy sensor
- Optional wireless control and monitoring system

Finish


- Five-stage super TGIC paint resists extreme weather conditions while providing optimal color and gloss retention. It's available in standard grey or optional bronze, black, dark platinum, graphite metallic or white.

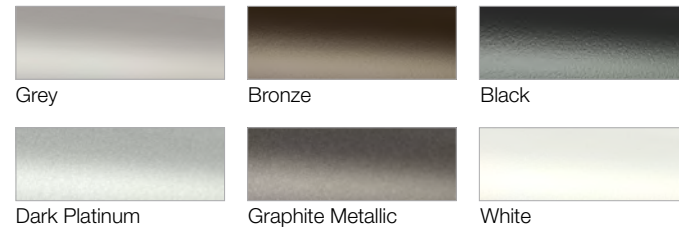

Warranty

- Five-year warranty

Extruded Aluminum Heat Sinks

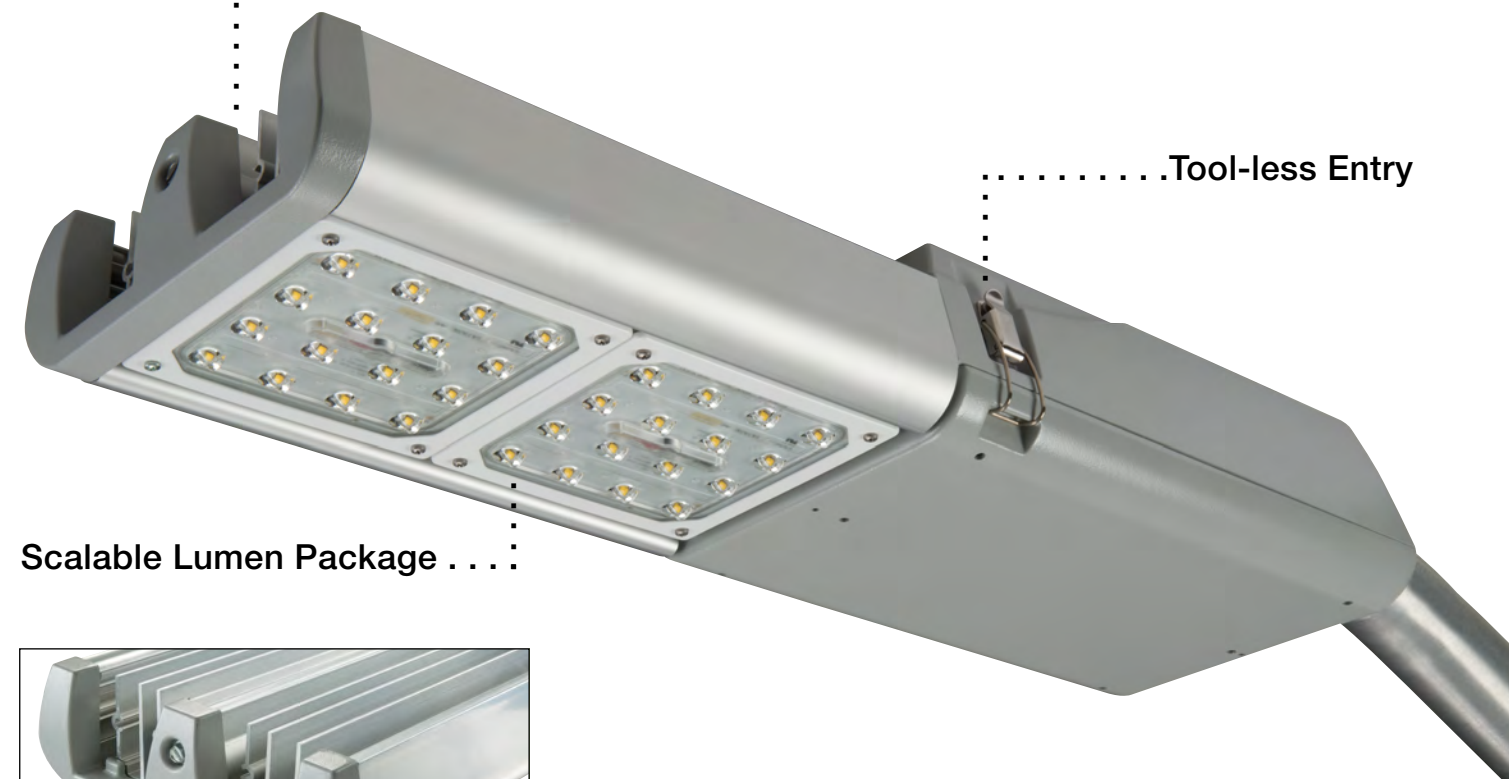

Tool-less Entry

Scalable Lumen Package




Self-Cleaning Heat Sinks



Tool-less Entry

Stainless steel latches provide easy, tool-less access to electrical compartment, even with lineman's gloves.




Quick Disconnects

Connections between power door and housing are made with tool-less quick disconnects. Power door removes in seconds.



Bird Guard

Standard bird guard fits securely around 1-1/4" and 2" pipe (1-5/8" to 2-3/8" O.D.).



Four-Bolt Mounting


Sturdy four-bolt mounting brackets fit 1-1/4" to 2" pipe (1-5/8" to 2-3/8" O.D.). It's available with optional built-in level indicator for a secure, level installation.

Optional Features



NEMA Photocontrol Receptacle

Gasketed receptacle for mounting standard NEMA photocontrol (order separately).



Surge Protection

A 10kV common surge (line-to-ground) and differential surge (line-to-line) mode protection is standard.



Occupancy Sensor

The optional motion sensor reduces energy use for site lighting applications.



IP66 Rating

Housing is available with IP66 rating for dust and water.

Scalable Illumination with LED Light Squares

Energy Savings and Environmental Stewardship

The simplest and most effective way to reduce a lighting fixture's impact on the environment is to minimize its energy consumption. By incorporating Light Squares from Cooper Lighting Solutions, the Navion LED luminaire provides energy savings up to 75 percent compared to standard HID solutions.

Long Life


With a 60,000+ hour rated life (at greater than 90 percent lumen maintenance), the Navion LED luminaire operates up to six times longer than traditional metal halide fixtures.

Low Maintenance


With simple quick disconnects, the Light Squares are easily removed in the field for replacement or for the rotation of the optics.

Warm White Color

Lighting designers, architects and specifying engineers have long preferred light sources that provide a balanced spectral power distribution and warm white light. Many LED solutions standardize on a cool blue 5000-6000K correlated color temperature (CCT) to maximize lumen output. The Navion luminaire provides warm white light at a standard 4000K CCT with no sacrifice in lumen output.



NOTE: Compliant with IESNA TM-21

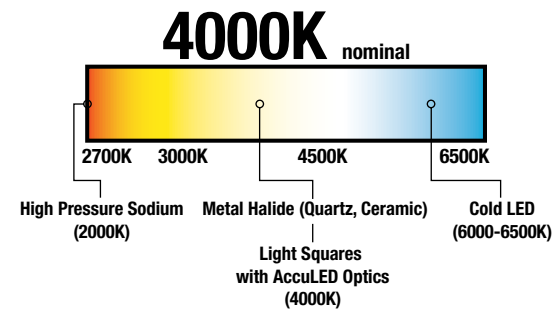

Optical Performance Redefined


Performance and Scalability

The Navion luminaire is designed around superior optical performance and scalability. With a choice of 15 lumen packages and 16 optical distributions, the optimal configuration can be used to maximize light levels while minimizing operating costs.

Power Consumption (Watts)

Number of Light Squares	Drive Current		
	530mA	700mA	1A
1	30	38	56
2	54	72	107
3	80	105	157
4	105	138	213
6	159	210	315

Efficacy (lm/W)

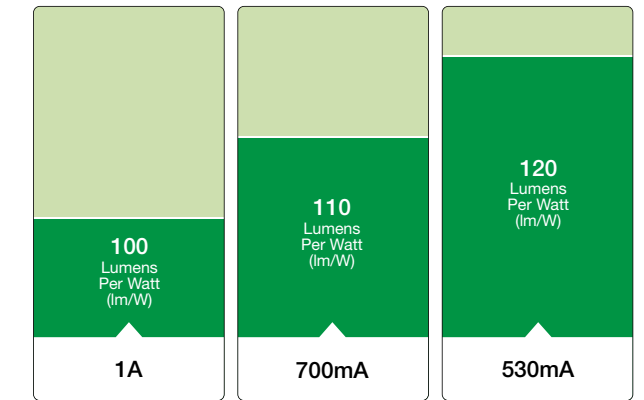


Lower Initial Cost Lower Operating Cost

NOTE: Nominal efficacy at 4000K CCT



Superior Efficiency and Control

With efficiencies as high as 95 percent, the patented AccuLED Optics™ system is up to 30 percent more efficient than traditional HID optical systems. Available in 16 optional distributions, this system provides the flexibility and performance required for outdoor applications.

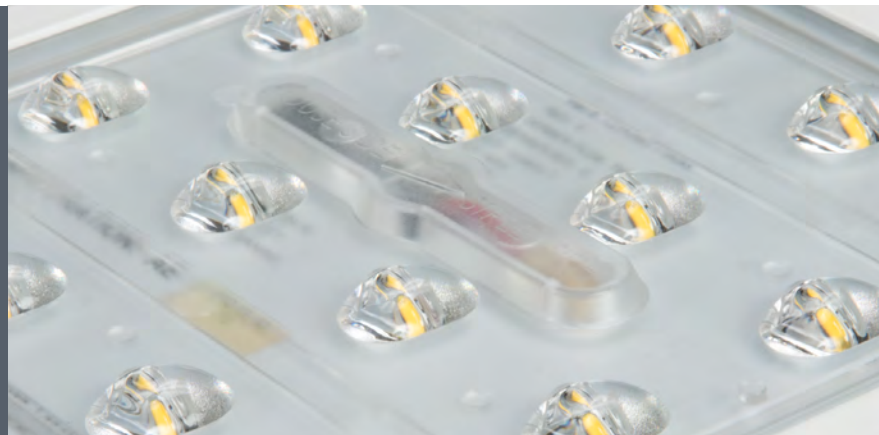


House Side Shield

For stringent light trespass requirements and the ultimate level of backlight control, a house side shield accessory is available for factory or field installation. Designed to seamlessly integrate with the SL2, SL3, SL4 and AFL distributions, the house side shield virtually eliminates backlight and also enhances visual comfort.



Optical Distributions

The Navion luminaire has a choice of seven asymmetric area, three asymmetric roadway, three symmetric and three specialized distributions.

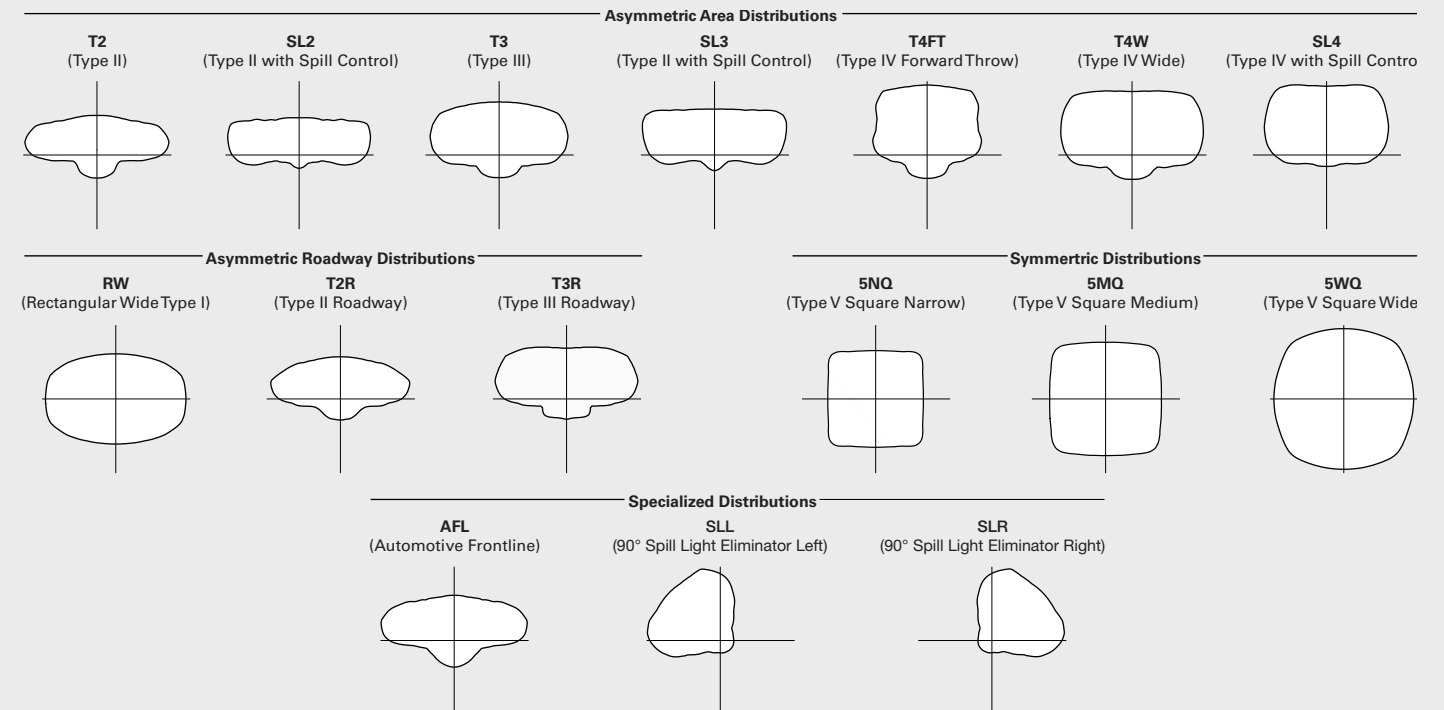

Configuration Flexibility

Performance and Versatility

The Navion luminaire is built around LED technology and designed to accommodate ongoing improvements in LED chips and drivers, making it the ideal solution for both current and future lighting requirements.



Pedestrian Pathway

The Navion luminaire's enhanced lighting performance and uniformity provides a safe and secure environment for pedestrians while improving energy efficiency.



Commercial

The Navion luminaire offers a long life and additional savings in maintenance costs packaged in a modern design for commercial applications, such as office buildings and shopping centers.



Industrial

Illuminating large areas without unnecessary glare or light spillage, while controlling the light distribution, makes the Navion luminaire an ideal solution for industrial applications, such as manufacturing and distribution.

Versatility and Simplicity

The Navion luminaire is designed to meet a wide range of outdoor lighting needs, from single-fixture applications to large-scale parking lots. Commercial customers will find it ideal for office buildings and shopping centers. Its higher lumen configurations excel in large parking applications, such as institutions, retail, airports, manufacturing and distribution facilities.

Whatever the application, the Navion luminaire delivers superior optical performance in a durable, modern design, while providing up to 70 percent less energy usage compared to typical HID luminaires. With greater than 90 percent lumen maintenance at 60,000 hours (over 16 years at 10 hours daily use), the Navion fixture offers a long life and additional savings in maintenance costs.

The Navion luminaire is offered in 16 optical packages to meet the exact needs of the illuminated area. The fixture's size and construction are scaled to the specific lumen package. Designed to withstand harsh environments, its rugged, die-cast aluminum construction and 2.5-mil polyester powder-coat finish provide superior protection. The 3G vibration rating and 10kV dual-mode surge protection are standard.



Ease of Installation and Maintenance

The Navion luminaire's performance comes with years of low-cost, low-hassle ownership. With lumen maintenance and life expectancy far beyond traditional HID light sources, regular and time-consuming service visits are a thing of the past. The simple and spacious Navion fixture housing is designed to fit lineman's gloves and can be installed with simple tools. Key electrical components are mounted on the power door, so service is tool-less. The door is small enough to hold in one hand, making field replacement quick and easy.



Tool-less Access

Stainless steel latches provide easy, tool-less access to the electrical compartment, even with lineman's gloves.



Hinged, Removable Power Door

Driver and surge protector is mounted to door. Power door hangs securely and can be easily removed without the use of tools.



Occupancy Sensing

Accelerate Payback on your Investment

To further enhance energy savings, the Navion luminaire offers an optional occupancy sensor that is integral to each individual luminaire. When the area surrounding the luminaire is unoccupied, the sensor has the ability to reduce light levels and power consumption. In addition to financial benefits, all the control options for the Navion luminaire are designed to be simple and cost-effective ASHRAE and Title 24 compliant solutions.



Dimming Occupancy Sensor (DOS)

When the DOS option is selected, the occupancy sensor is connected to a dimming driver and the entire luminaire dims when there is no activity detected. When activity is detected, the luminaire returns to full light output. The sensor is factory preset to dim down to approximately 50 percent lumen output with a time delay of five minutes. To change these settings, a FSIR-100 accessory can be purchased. The FSIR-100 is a wireless configuration tool that allows the dimming level, time delay, sensitivity and other parameters to be changed. Consult a representative from Cooper Lighting Solutions for additional details.





LumaWatt Wireless Control and Monitoring System (DIMRF-LW and DIMRF-LN)

The LumaWatt system is best described as a peer-to-peer wireless network of luminaire-integral sensors that operate in accordance with programmable profiles. The end user can create and manage sensor profiles with browser-based management software and broadcast to the sensors as necessary via wireless gateways. Each sensor is capable of motion and photo sensing, metering power consumption and wireless communication. For additional details, refer to www.cooperlighting.com.

Dimming Occupancy Sensor (DOS)

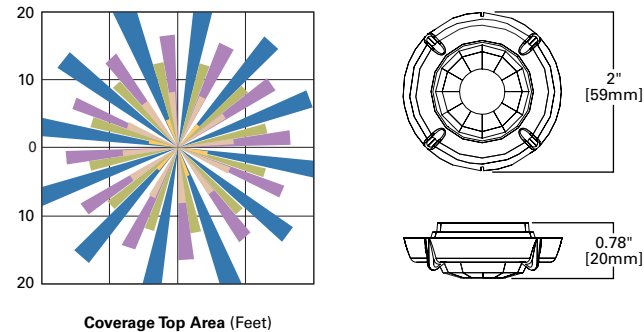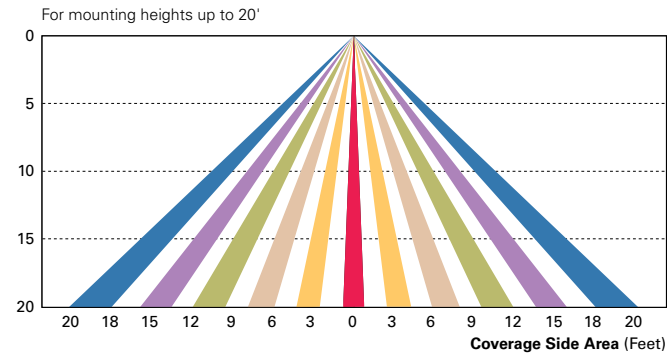

LumaWatt (DIMRF-LW and DIMRF-LN)

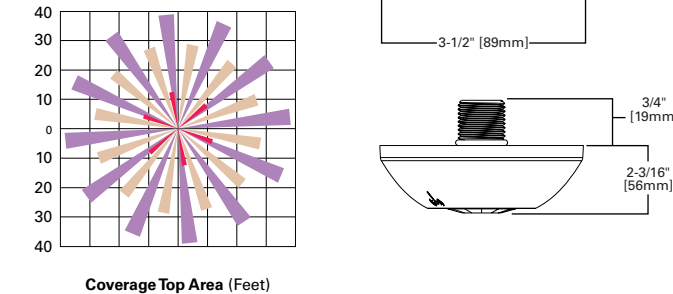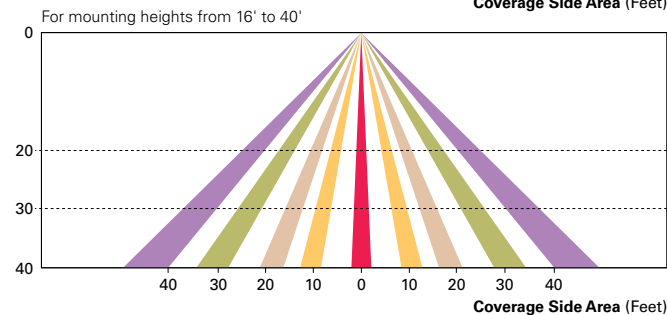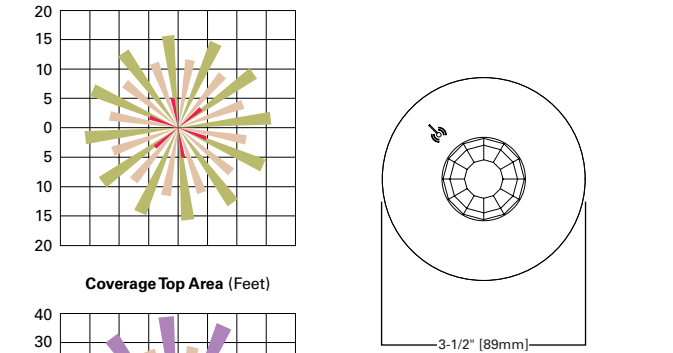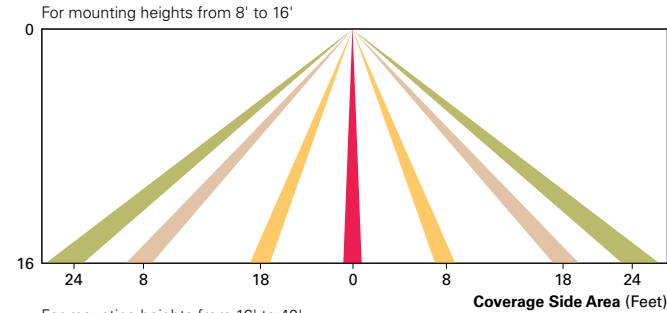

Ordering Information


Sample Number: NAV-AE-01-E-UNV-T3-10K-AI-AP

Product Family	Light Engine	Number of Light Squares ¹	Driver	Voltage	Distribution	Surge Protection
NAV=Navion	AE=1A Drive Current	01=1 02=2 03=3 04=4 06=6	E=Non-Dimming D=Dimming	UNV=Universal 120-277V 347=347V 480=480V	T2=Type II T2R=Type II Roadway T3=Type III T3R=Type III Roadway T4FT=Type IV Forward Throw T4W=Type IV Wide 5NQ=Type V Square Narrow 5MQ=Type V Square Medium 5WQ=Type V Square Wide	10K=Cooper Lighting Solutions 10kV Surge Module (Standard) X=Driver Surge Protection Only ²
Options (Add as Suffix)						Color
2L=Two Circuits ³ 7030=70 CRI 3000K ⁴ 7060=70 CRI 6000K ⁴ 530=Drive Current Factory Set to 530mA ⁵ 700=Drive Current Factory Set to 700mA ⁵ PER=NEMA Twistlock Photocontrol Receptacle IP66=IP66 Rated HA=50°C High Ambient L90=Optics Rotated 90° Left R90=Optics Rotated 90° Right		MS/DIM-L08=Motion Sensor for Dimming Operation, Maximum 8' Mounting Height ⁶ MS/DIM-L20=Motion Sensor for Dimming Operation, 9' - 20' Mounting Height ⁶ MS/DIM-L40=Motion Sensor for Dimming Operation, 21' - 40' Mounting Height ⁶ MS/X-L08=Bi-Level Motion Sensor, Maximum 8' Mounting Height ⁷ MS/X-L20=Bi-Level Motion Sensor, 9' - 20' Mounting Height ⁷ MS/X-L40=Bi-Level Motion Sensor, 21' - 40' Mounting Height ⁷ K=Level Indicator AI=Arm Included ⁸ LCF=Light Square Trim Plate Matches Housing Color HSS=Factory Installed House Side Shield ⁹			AP=Grey (Standard) BZ=Bronze BK=Black DP=Dark Platinum GM=Graphite Metallic WH=White	
Accessories (Order Separately)						
OA1223=10kV Surge Module Replacement OA/RA1013=Photocontrol Shorting Cap OA/RA1014=NEMA Photocontrol - 120V OA/RA1016=NEMA Photocontrol - Multi-Tap OA/RA1027=NEMA Photocontrol - 480V OA/RA1201=NEMA Photocontrol - 347V MA1010-XX=Single Tenon Adapter for 3-1/2" O.D. Tenon		MA1011-XX=2 @ 180° Tenon Adapter for 3-1/2" O.D. Tenon MA1012-XX=3 @ 120° Tenon Adapter for 3-1/2" O.D. Tenon MA1013-XX=4 @ 90° Tenon Adapter for 3-1/2" O.D. Tenon MA1014-XX=2 @ 90° Tenon Adapter for 3-1/2" O.D. Tenon MA1015-XX=2 @ 120° Tenon Adapter for 3-1/2" O.D. Tenon MA1016-XX=3 @ 90° Tenon Adapter for 3-1/2" O.D. Tenon MA1017-XX=Single Tenon Adapter for 2-3/8" O.D. Tenon		MA1018-XX=2 @ 180° Tenon Adapter for 2-3/8" O.D. Tenon MA1019-XX=3 @ 120° Tenon Adapter for 2-3/8" O.D. Tenon MA1045-XX=4 @ 90° Tenon Adapter for 2-3/8" O.D. Tenon MA1048-XX=2 @ 90° Tenon Adapter for 2-3/8" O.D. Tenon MA1049-XX=3 @ 90° Tenon Adapter for 2-3/8" O.D. Tenon FSIR-100=Wireless Configuration Tool for Motion Sensor ¹⁰ LS/HSS-XX=Field Installed House Side Shield ¹¹		


NOTES: 1 Standard 4000K CCT and minimum 70 CRI. 2 Consult factory for driver surge protection values. 3 Low-level output varies by number of light squares specified. Consult factory. Requires two or more light squares. No terminal block with 2L options. 4 Use dedicated IES files for 3000K and 6000K when performing layouts. These files are published on the Navion luminaire product page on the website. 5 1 Amp standard. Use dedicated IES files for 530mA and 700mA when performing layouts. These files are published on the Navion luminaire product page on the website. 6 Sensor mounted externally. Must specify dimming driver. Consult factory for more information. 7 Sensor mounted externally. Available in 2, 3, 4 or 6 square configurations. Replace "X" with number of squares in low output mode. For ON/OFF operation, replace "X" with "0". Maximum two squares in low output mode. Not available with dimming driver. No terminal block with ON/OFF sensor. 8 22" upsweep arm. Round pole adapter and mounting hardware included. "M" Drill Pattern. 9 Only for use with SL2, SL3, SL4 and AFL distributions. The Light Square trim plate is painted black when the HSS option is selected. 10 This tool enables adjustment of parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your Cooper Lighting Solutions representative for additional details. 11 One required for each Light Square.

Dimensions

1, 2 or 3 Light Squares



4 or 6 Light Squares




Dimensional Data

Number of Light Squares	"A" Length
1	21-1/2" (546mm)
2	27-5/8" (701mm)
3	33-5/8" (854mm)
4	27-5/8" (704mm)
6	33-5/8" (854mm)

Arm Drilling

Type "M"




Lumen Multiplier

Ambient Temperature	Lumen Multiplier
0°C	1.02
10°C	1.01
25°C	1.00
40°C	0.99
50°C	0.97

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 Hours)	Theoretical L70 (Hours)
25°C	> 94%	> 350,000
40°C	> 93%	> 250,000
50°C	> 90%	> 170,000

Optional Arm

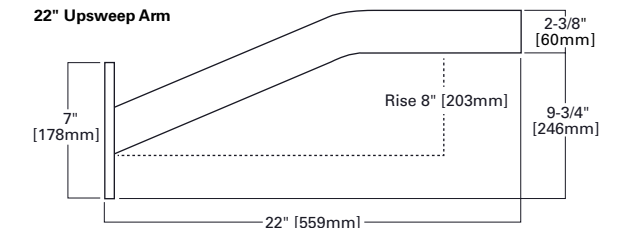

Additional Information

Compliances	Technical Data (Electronic Driver)	EPA (Effective Projected Area - Square Feet)			Shipping Data (Approximate Net Weight)
		Number of Light Squares	Without Arm	With Arm	
UL and cUL Wet Location Listed IP66 Light Squares 3G Vibration Rated ARRA Compliant ISO9001	+40°C (104°F) Ambient Temperature Rating	1 Square	0.8	1.2	1 Square 17 lbs. (7.7 kgs.)
	-40°C (-40°F) Ambient Temperature Rating	2 Squares	1.0	1.3	2 Squares 22 lbs. (10.0 kgs.)
	Optional 50°C (HA) Ambient Temperature Rating	3 Squares	1.2	1.5	3 Squares 26 lbs. (11.8 kgs.)
	>0.9 Power Factor	4 Squares	1.2	1.5	4 Squares 31 lbs. (14.1 kgs.)
	<20% Total Harmonic Distortion	6 Squares	1.4	1.7	6 Squares 36 lbs. (16.3 kgs.)
	120-277V/50 and 60 Hz 347/60 Hz, 480V/60 Hz				

NOTE: Specification and dimensions subject to change without notice.



Lighting Brands

Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
Halo
Halo Commercial
Invue
io
Iris
Lumark
Lumière
McGraw-Edison
Metalux
MWS
Neo-Ray
Portfolio
RSA
Shaper
Streetworks
Sure-Lites

Controls Brands

Greengate
Fifth Light

Connected Lighting Systems

HALO Home
WaveLinx

IoT Platforms

Trellix



Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

© 2021 Cooper Lighting Solutions
All Rights Reserved
Publication No. BR514112EN
April 2021

Cooper Lighting Solutions is a registered trademark.

All other trademarks are property of their respective owners.

Product availability, specifications, and compliances are subject to change without notice.