

This product is suitable for damp locations.

This product may be dimmed with a low-voltage electronic dimmer.


This product may be mounted horizontally or vertically.

CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

Install the Mounting Plate

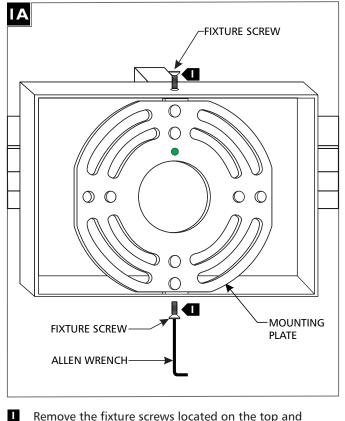


- Remove the fixture screws located on the top and bottom of the fixture base with the provided Allen wrench.
- **2** Remove the mounting plate and strap from the fixture base.

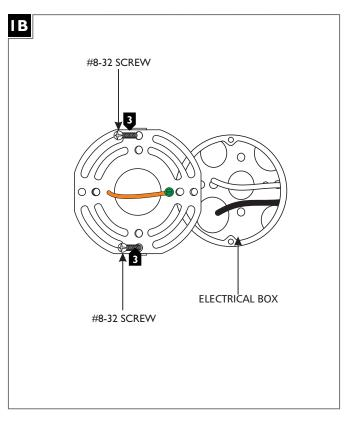

3 Install the mounting plate onto the electrical box with the two #8-32 screws provided.

Install the Fixture

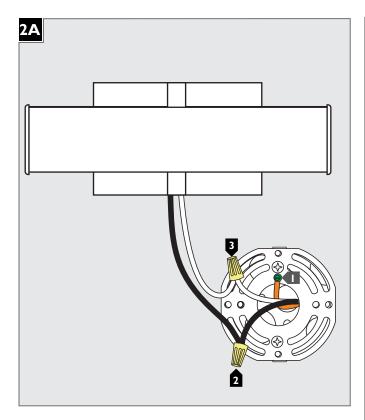

- Connect the mounting plate ground wire to a suitable ground according to local electrical codes.
- 2 Connect the black driver wire to the hot power line wire with a wire nut.
- 3 Connect the white driver wire to the neutral power line wire with a wire nut.
- 4 Properly place the driver, all wires, and wire nut connections into the fixture base.
- 5 Mount the fixture by sliding it back onto the mounting plate, then reinstalling the strap and fixture screws (reversal of figure 1A).

SAVE THESE INSTRUCTIONS!



847.410.4400

www.techlighting.com

© 2019 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification. A Generation Brands Company