

# POINT SOURCE EMITTERS

Pressure Compensating Flow: **0.5, 1.0, 2.0, 4.0, 6.0 GPH**

## FEATURES

- Pressure compensating
- Color-coded by flow
- Three inlet variations: ¼" barb, 10-32 thread, ½" FPT
- Coined edges for easy grip
- Self-piercing barb
- Optional diffuser cap
- Self-flushing diaphragm
- Warranty period: 2 years

## OPERATING SPECIFICATIONS

- Recommended pressure range: 20 to 50 PSI
- Minimum filtration 150 mesh; 100 microns

POINT SOURCE EMITTERS - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4							
1	Model	2	Flow Rate	3	Inlet	4	Qty./Bag
HE		<b>050</b>	= 0.5 GPH		<b>B</b> = Self-piercing Barb*	25	
HEB		<b>10</b>	= 1.0 GPH		<b>T</b> = 10-32 Threaded*	100	
		<b>20</b>	= 2.0 GPH		<b>(blank)</b> = ½" Female Thread		
		<b>40</b>	= 4.0 GPH				
		<b>60</b>	= 6.0 GPH				

\* For HE only (not HEB)

Example:

HE-20 - T - 25 = 2.0 GPH Point Source Emitter with 10-32 thread in a bag of 25

HEB-050 - 100 = 0.5 GPH Point Source Emitter with ½" female thread in a bag of 100

½" FEMALE THREAD (BROWN BASE)			
	Model	Inlet Type	Flow (GPH)
● Blue	HEB-05-BR	½" Female Thread	0.5
● Black	HEB-10-BR	½" Female Thread	1.0
● Red	HEB-20-BR	½" Female Thread	2.0
● Tan	HEB-40-BR	½" Female Thread	4.0
● Orange	HEB-60-BR	½" Female Thread	6.0

EMITTER MODEL CHART			
	Model	Inlet Type	Flow (GPH)
● Blue	HE-050-B	Self-piercing Barb	0.5
● Black	HE-10-B	Self-piercing Barb	1.0
● Red	HE-20-B	Self-piercing Barb	2.0
● Tan	HE-40-B	Self-piercing Barb	4.0
● Orange	HE-60-B	Self-piercing Barb	6.0
● Blue	HE-050-T	10-32 Thread	0.5
● Black	HE-10-T	10-32 Thread	1.0
● Red	HE-20-T	10-32 Thread	2.0
● Tan	HE-40-T	10-32 Thread	4.0
● Orange	HE-60-T	10-32 Thread	6.0
● Blue	HEB-05	½" Female Thread	0.5
● Black	HEB-10	½" Female Thread	1.0
● Red	HEB-20	½" Female Thread	2.0
● Tan	HEB-40	½" Female Thread	4.0
● Orange	HEB-60	½" Female Thread	6.0

### DIFFUSER CAP

(HE-DIFF)

Gently diffuses water on higher flow emitters to prevent erosion.




### ½" FEMALE THREAD


(brown base)



### Inlet Options

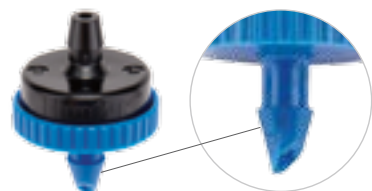

① Self-piercing Barb

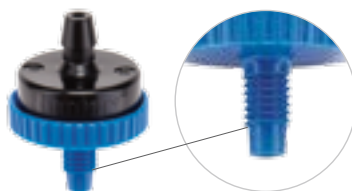

② 10-32 Thread



③ ½" Female Thread