

PLANETA GIRDER TROLLEYS PUSH OR GEARED TYPE




Push trolleys are suited for lighter loads. Geared trolleys will move heavier loads easily using a hand chain, the chain transmission brings the power to the wheels. The load is balanced on four wheels. Chain hoists with the same capacity rating can be hooked into the trolley.

The hand chains are zinc coated for long life. The trolley can be mounted simply by pushing it on an open girder or disassembling the unit.

FEATURES


- » The central load suspension system and the robust side plates allow the demands of big jobs
- » The suspension system works to divide the load evenly among the four wheels
- » The large forged steel side plates enhance tilting protection
- » The cast iron wheels are quiet and safe due to lifetime lubricated sealed ball bearings
- » Adjustable for various beam sizes by simply changing the number of spacers. The standard bolts are for small flange widths. Longer bolts allow the use on wider flanges up to 300 mm width
- » The contour trolley wheel design provides maximum beam contact on flat or tapered beams.

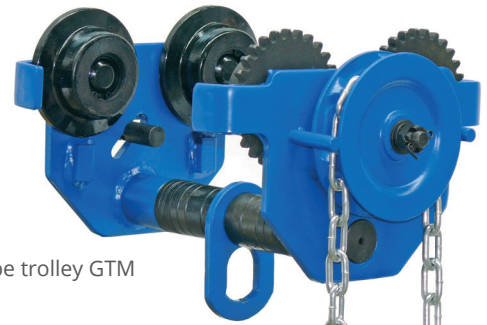


Geared type trolley GTM



Push trolley PTM

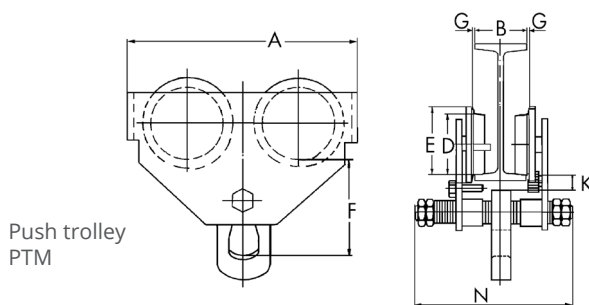

Push trolley
PTM

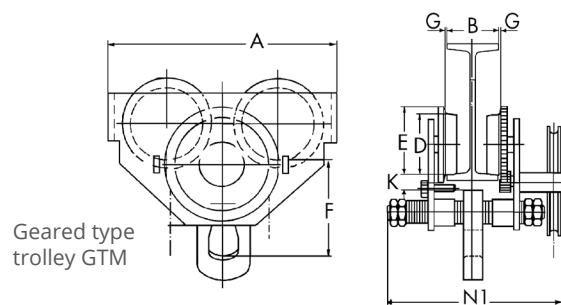

Geared type
trolley GTM

SPECIFICATIONS

TYPE PUSH TROLLEY	PTM...	PL/PTM/0.5T	PL/PTM/1.0T	PL/PTM/2.0T	PL/PTM/3.0T	PL/PTM/5.0T	PL/PTM/10.0T
TYPE GEAR TYPE TROLLEY	GTM...	PL/GTM/0.5T	PL/GTM/1.0T	PL/GTM/2.0T	PL/GTM/3.0T	PL/GTM/5.0T	PL/GTM/10.0T
CAPACITY	t	0.5	1.0	2.0	3.0	5.0	10.0
Flange width B min. - max. PTM / GTM	mm	50 - 203 / 64 - 203	64 - 203	88 - 203	100 - 203	114 - 203	124 - 203
Min. Curve radius	mm	0.8	0.9	1	1.2	1.3	1.7
Hand chain operation length GTM	mm	2.5	2.5	2.5	2.5	2.5	2.5
A	mm	199	246	276	332	377	389
D	mm	55	68	80	100	110	136
E	mm	67	81.5	94	115.5	127	156
F	mm	105	125	150	171	196	285
G	mm	2	2	2	3	3	3
K	mm	30	38	38	40	42	22
N	mm	295	311	327	343	355	403
N1	mm	326	338	349	362	374	480
Weight PTM	kg	7	10.5	17.5	27	41	48
Weight GTM	kg	14.5	14.5	21.5	31	46	95

COMPANY CONTACT DETAILS

LTM - Lift Turn Move Ltd
Unit 2 Stadium Court
Wirral International Business Park
Plantation Road, Bromborough
Wirral, UK CH62 3QG

SALES AND GENERAL CONTACTS

Tel: +44 (0)151 649 0467
Fax: +44 (0)151 649 0099
Email: sales@LiftTurnMove.co.uk
Email: accounts@LiftTurnMove.co.uk
Website: www.liftturnmove.co.uk

OPENING HOURS

Mon-Thur: 8:30 - 5:00
Friday: 8:30 - 2:30

The office is often open outside these times.

DELIVERIES

We use various methods of delivery and can deliver more or less whenever you need.

To stay up to date with the latest events at LTM please follow us on Facebook, Twitter and LinkedIn

